


**Features**



- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked together to form one continuous run
- Suitable surface mount, direct view, and architectural reveal applications
- Suitable for installation in the storage area of a clothes closet on outputs 5.7W/ft or less, NEC compliant for the USA only.
- Class 2 listed for damp locations
- Dot free even illumination with frosted lens

- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Vibrant Color options offer premium quality and with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with over 1710 lm/ft and up to 121 lm/W
- Average Life (L70): 50,000hrs
- 7 year warranty



**Finish Options** (see page 4 for additional information)

- Base  Silver Anodized
- Powder Coat  Black  Bronze  White
- Premium  Matte Black  Warm Nickel  Aged Brass  Polished Gold  Chrome



**Technical Information**

TYPE	Vibrant Color VC72					
	2x VC72VLO	2x VC72LO	2x VC72SO	2x VC72MO	2x VC72HO	2x VC72VHO
<b>Lumens Output (3000K)</b> <small>(with a Frosted Lens)</small>	193 lm/ft	491 lm/ft	654 lm/ft	864 lm/ft	1045 lm/ft	1392 lm/ft
<b>Average Power Consumption</b> <small>(for a 4" section)</small>	2.2 W/ft	5.6 W/ft	7.4 W/ft	9.8 W/ft	11.8 W/ft	15.8 W/ft
<b>Efficacy</b>	88 lm/W	88 lm/W	88 lm/W	88 lm/W	89 lm/W	88 lm/W
<b>Max Run Length</b> <small>(individual fixture)</small>	28.5 ft	16 ft	14 ft	12 ft	10.5 ft	9 ft
<b>Ambient Operating Temperature Range*</b>	-4°F - 122°F (-20°C - 50°C)				-4°F - 104°F (-20°C - 40°C)	

CCT	Multiplier <small>(ref. - 30K)</small>	CRI	TM-30		
			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
1800K	0.50	95	94	99	86
2200K	0.66	96	94	101	95
2400K	0.90	98	96	101	91
2700K	0.93	98	96	102	93
3000K	1.00	97	94	104	99
3500K	1.04	96	94	105	97
4100K	1.05	97	95	104	96

TYPE	High Efficacy HE64					
	2x HE64VLO	2x HE64LO	2x HE64SO	2x HE64MO	2x HE64HO	2x HE64VHO
<b>Lumens Output (3000K)</b> <small>(with a Frosted Lens)</small>	214 lm/ft	461 lm/ft	661 lm/ft	879 lm/ft	1249 lm/ft	1713 lm/ft
<b>Average Power Consumption</b> <small>(for a 4" section)</small>	2 W/ft	3.8 W/ft	5.8 W/ft	7.6 W/ft	11.2 W/ft	14.2 W/ft
<b>Efficacy</b>	107 lm/W	121 lm/W	114 lm/W	116 lm/W	112 lm/W	121 lm/W
<b>Max Run Length</b> <small>(individual fixture)</small>	45 ft	27.4 ft	17.4 ft	13 ft	8.5 ft	6.5 ft
<b>Ambient Operating Temperature Range*</b>	-4°F - 122°F (-20°C - 50°C)					

CCT	Multiplier <small>(ref. - 30K)</small>	CRI	TM-30		
			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
2200K	0.74	94	91	96	65
2400K	0.87	94	92	97	56
2700K	0.97	94	92	100	57
3000K	1.00	93	91	99	54
3500K	1.01	95	91	99	62
4000K	1.04	95	91	99	68


**Ordering Code**

MODEL	LENGTH <sup>1</sup>	OUTPUT <sup>2</sup>	CCT	LENS <sup>3</sup>	MOUNTING	LEFT END CAP <sup>6</sup>	LEFT END CAP <sup>6</sup>	RIGHT END CAP <sup>6</sup>	POWER FEED LEFT END <sup>7</sup>	POWER FEED RIGHT END <sup>7</sup>
K-Kilo	12"-144" 1" increments	VC72VLO-Very Low	18K-1800K	F-Frosted C-Clear N-No Lens	CB-Concealed Bracket A-Adjustable Hinge Bracket, up to 90° <sup>5</sup>	BASE SA-Silver Anodized	LE-Endcap Left End LN-No Endcap Left End	RE-Endcap Right End RN-No Endcap Right End	LWE-End Wire Leads LFE-End Female Q/C	RNPF-No Power Feed
		VC72LO-Low	22K-2200K							
	12"-144" 2" increments	HE64VLO-Very Low	22K-2200K			PREMIUM MBK-Matte Black WN-Warm Nickel AB-Aged Brass PG-Polished Gold <sup>5</sup> CH-Chrome <sup>5</sup>	LE-Endcap Left End LN-No Endcap Left End	RE-Endcap Right End RN-No Endcap Right End	LNPF-No Power Feed	RWWE-End Wire Leads RFE-End Female Q/C
		HE64LO-Low	24K-2400K							


1 - Custom lengths and increments are available, please consult Inside Sales with specific request.  
 2 - Title 24 JAB achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.  
 3 - Continuous Lens may be ordered separately for multi-fixture runs to create an even, seamless appearance.  
 4 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.  
 5 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".  
 6 - End caps will have a hole for the wire feed if End Wire Leads are chosen for Power Feed.  
 7 - Wire leads are 72" long.  
 8 - NOTE: Each Kilo Surface fixture/section requires it's own home run to a power supply. They cannot be electrically connected together.

Kilo Surface Corner Options


**K-FC**  
Flat Corner

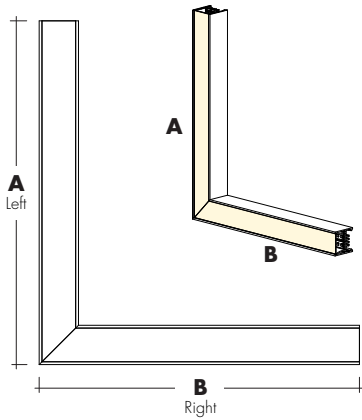

**K-IC**  
Inner Corner

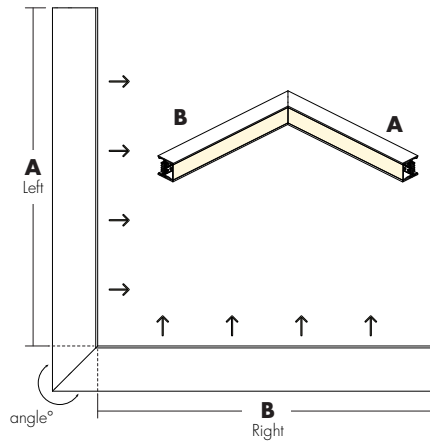

**K-OC**  
Outside Corner

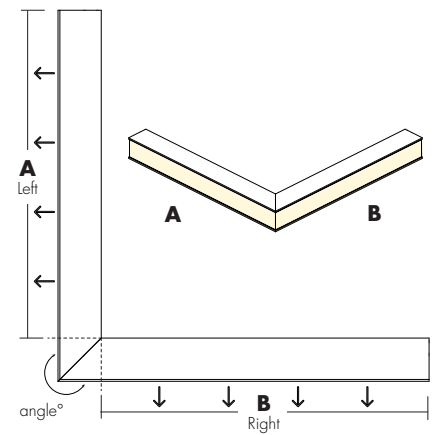

Vibrant Color	Actual Length		Total Wattage					
	A	B	2x VC72VLO	2x VC72LO	2x VC72SO	2x VC72MO	2x VC72HO	2x VC72VHO
Flat (K-FC)	12 5/16	13 5/16	4.3	11.4	14.8	19.8	25.4	32.0
Inner (K-IC)	12 12/16	12 12/16	4.3	11.4	14.8	19.8	25.4	32.0
Outer (K-OC)	11 8/16	11 8/16	4.3	11.4	14.8	19.8	25.4	32.0

High Efficacy	Actual Length		Total Wattage					
	A	B	2x HE64VLO	2x HE64LO	2x HE64SO	2x HE64MO	2x HE64HO	2x HE64VHO
Flat (K-FC)	12 10/16	13 10/16	4.0	7.8	11.9	16.3	23.5	29.6
Inner (K-IC)	13 1/16	13 1/16	4.0	7.8	11.9	16.3	23.5	29.6
Outer (K-OC)	11 13/16	11 13/16	4.0	7.8	11.9	16.3	23.5	29.6

Ordering Code

MODEL	CORNER	ANGLE <sup>1</sup>	OUTPUT <sup>2</sup>	CCT	LENS <sup>3</sup>	MOUNTING	FINISH <sup>4</sup>	LEFT END CAP <sup>5</sup> (A)	RIGHT END CAP <sup>5</sup> (B)	POWER FEED LEFT END <sup>7</sup>	POWER FEED RIGHT END <sup>7</sup>
K - Kilo	IC - Inside Corner OC - Outside Corner FC - Flat Corner	90°-90° C - Custom Angle Corner <sup>1</sup>	VC72VLO - Very Low VC72LO - Low VC72SO - Standard VC72MO - Medium VC72HO - High VC72VHO - Very High	18K - 1800K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	F - Frosted C - Clear N - None	CB - Concealed Bracket	BASE SA - Silver Anodized  POWDER COAT BK - Black BZ - Bronze WH - White  PREMIUM MBK - Matte Black WN - Warm Nickel AB - Aged Brass PG - Polished Gold <sup>6</sup> CH - Chrome <sup>5</sup>	LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	LWE - End Wire Leads LFE - End Female Q/C  LWB - Back Wire Leads LFB - Back Female Q/C	RNPF - No Power Feed   RWB - Back Wire Leads RFB - Back Female Q/C
			HE48VLO - Very Low HE48LO - Low HE48SO - Standard HE48MO - Medium HE48HO - High HE48VHO - Very High	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K				LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	LNPF - No Power Feed	RWE - End Wire Leads RFE - End Female Q/C
								LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	LNPF - No Power Feed	RWB - Back Wire Leads RFB - Back Female Q/C


1 - Custom Angle Corners are available, please consult Inside Sales with specific request.  
 2 - Title 24 JAB achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.  
 3 - Continuous Lens may be ordered separately for multi-fixture runs to create an even, seamless appearance.

4 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.  
 5 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".  
 6 - End caps will have a hole for the wire feed if End Wire Leads are chosen for Power Feed.  
 7 - Wire leads are 72" long.  
 8 - NOTE: Each Kilo Surface fixture/section requires it's own home run to a power supply. They cannot be electrically connected together

**Powerfeed options for Continuous Run Straight Fixtures**


**START FIXTURE (LEFT ENDCAP)**

Wire leads/Female Q/C on Left End of Fixture




**MIDDLE FIXTURE (NO ENDCAPS)**

Wire leads/Female Q/C on Left or Right Back of Fixture

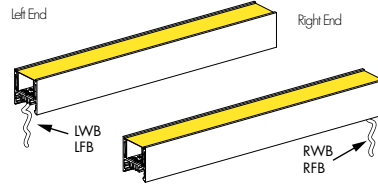


**END FIXTURE (RIGHT ENDCAP)**

Wire leads/Female Q/C on Right End of Fixture




**START FIXTURE (LEFT ENDCAP)**

Wire leads/Female Q/C on Left or Right Back of Fixture

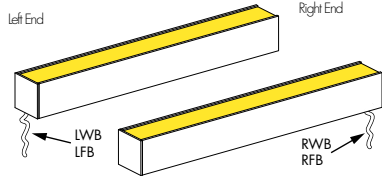

**END FIXTURE (RIGHT ENDCAP)**


Wire leads/Female Q/C on Left/Right Back of Fixture

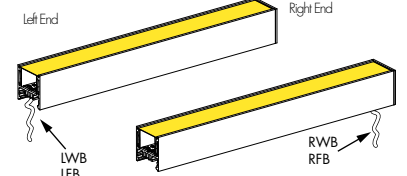

**Powerfeed options for Single Straight Fixtures**


**SINGLE FIXTURE (TWO ENDCAPS)**

Wire leads/Female Q/C on Left or Right End of Fixture

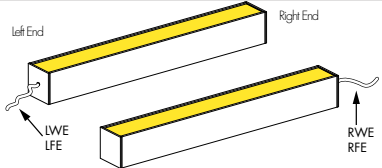

**SINGLE FIXTURE (TWO ENDCAPS)**


Wire leads/Female Q/C on Left or Right Back of Fixture

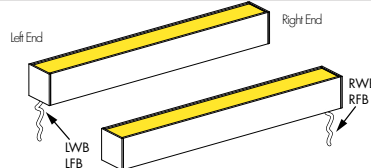

**Powerfeed options for Corner Fixtures**

**KR-FC-90-XX-LNPF-RXX**


Wire Leads or Female Quick Connect on Power Feed Right End/Back of Flat Corner

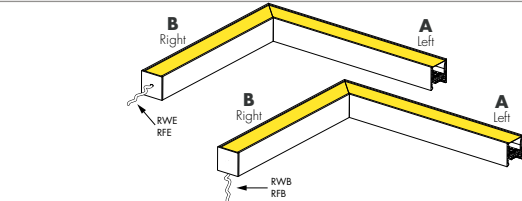

Note: Back Wire Feed also available on Power Feed Left End (A), but not shown

**KR-FC-90-XX-LXX-RNPF**


Wire Leads or Female Quick Connect on Power Feed Left End/Back of Flat Corner

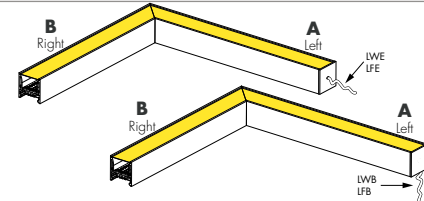

Note: Back Wire Feed also available on Power Feed Right End (B), but not shown

**KR-IC-90-XX-LNPF-RXX**


Wire Leads or Female Quick Connect on Power Feed Right End/Back of Inside Corner

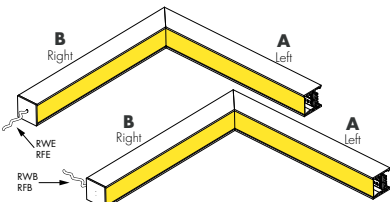

Note: Back Wire Feed also available on Power Feed Left End (A), but not shown

**KR-IC-90-XX-LXX-RNPF**


Wire Leads or Female Quick Connect on Power Feed Left End/Back of Inside Corner

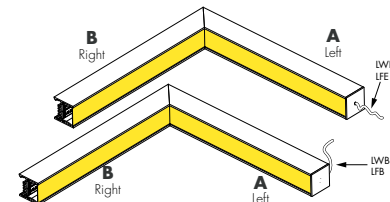

Note: Back Wire Feed also available on Power Feed Right End (B), but not shown

**KR-OC-90-XX-LNPF-RXX**


Wire Leads or Female Quick Connect on Power Feed Right End/Back of Outside Corner

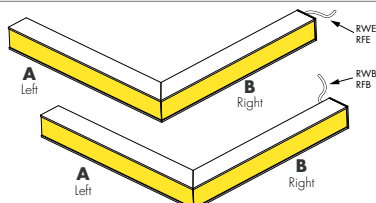

Note: Back Wire Feed also available on Power Feed Left End (A), but not shown

**KR-OC-90-XX-LXX-RNPF**



Wire Leads or Female Quick Connect on Power Feed Left End/Back of Outside Corner

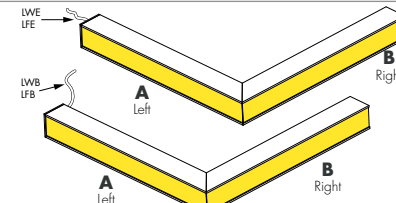

Note: Back Wire Feed also available on Power Feed Right End (B), but not shown


**Product Dimensions**

CB  
Concealed Bracket





Left Side

Right Side

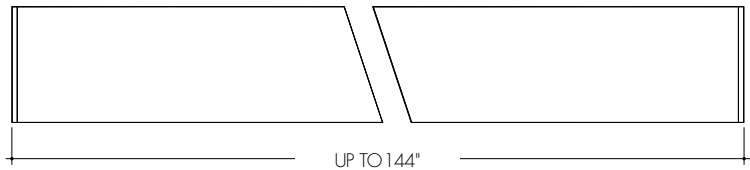


A  
Adjustable Hinge  
Mounting Bracket

Back cover plate on  
adjustable hinge  
mounting only



Left Side

Right Side

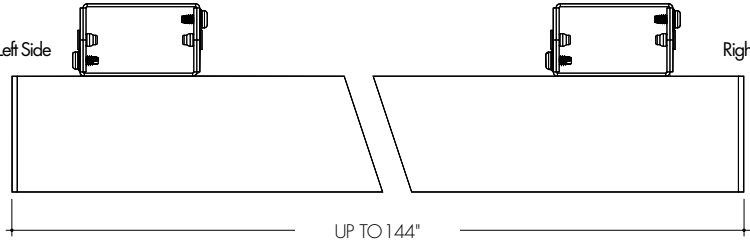


Adjustable Hinge Mounting Bracket is not available on system runs with corners

**Finish Options**


- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Base finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

**Silver Anodized  
Base**




Silver Anodized is a soft silver with a clear finish.

**Black  
Powder Coat**




Black is a true deep black with a glossy finish.

**Bronze  
Powder Coat**




Bronze is a rich, dark brown with a satin finish.

**White  
Powder Coat**




White is a polar bright white and field paintable.

**Matte Black  
Premium**




Matte Black is a dark, pitch-black with a soft flat finish.

**Warm Nickel  
Premium**




Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

**Aged Brass  
Premium**




Aged Brass is a deep brown shade with slightly golden undertones.

**Polished Gold  
Premium**



Polished Gold is bright and radiant for a brilliant finish.


**Chrome  
Premium**



Chrome is a highly reflective silver polish.

Accessory Options

Continuous Lens (Field Cuttable)




**KILOC-FF** - Kilo Channel Continuous Frosted Lens  
**KILOC-CC** - Kilo Channel Continuous Clear Lens

**XX** - Order in 10' increments up to 200'

**Note:** Order the continuous (field cuttable) lens up to 200'. Recommended to avoid seams between multiple fixtures joining together.

**LVSP-4T-BK**

Low Voltage, 4 Terminal Splice Box, Black, IP20



Sample Layout of Power Feed

**K-XX-LE-RN-LWE-RNPF**


End cap left end, no end cap right end of Fixture  
 Wire leads on the left end of Fixture

**K-XX-LN-RN-LWB-RNPF**


No end cap on left or right end of Fixture  
 Wire leads on the left backside of Fixture

**K-XX-LN-RE-LNPF-RFB**

No end cap left end, end cap right end of Fixture  
 Female Q/C on the right backside of Fixture

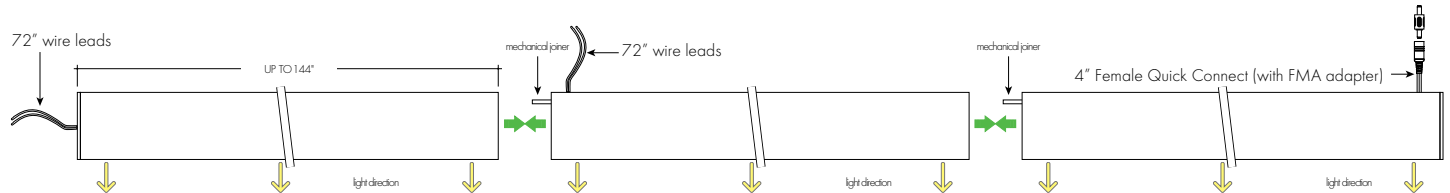

**NOTE:** Kilo Surface sections are not joined electrically. Each Kilo Surface section requires its own home run to the power supply. Mechanical joiners are included for every missing LEFT end cap (LN)

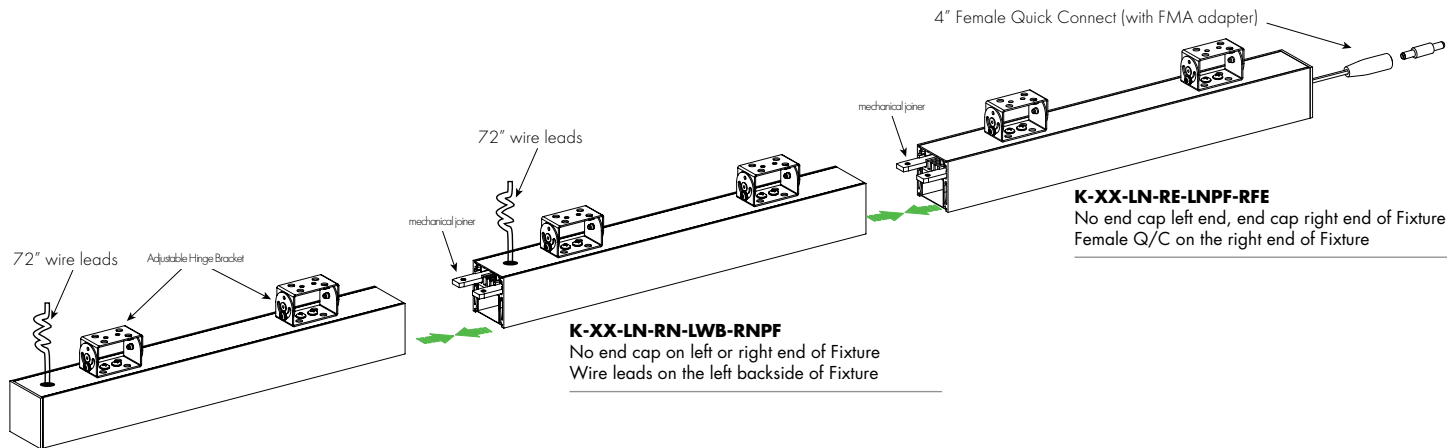

**K-XX-LE-RN-LWB-RNPF**

End cap left end, no end cap right end of Fixture  
 Wire leads on the left backside of Fixture

**K-XX-LN-RN-LWB-RNPF**


No end cap on left or right end of Fixture  
 Wire leads on the left backside of Fixture

**K-XX-LN-RE-LNPF-RFE**

No end cap left end, end cap right end of Fixture  
 Female Q/C on the right end of Fixture



**NOTE:** Kilo Surface sections are not joined electrically. Each Kilo Surface section requires its own home run to the power supply. Adjustable hinge mounting brackets are not compatible with corners, or system runs that have corner sections in them.

Layout Example

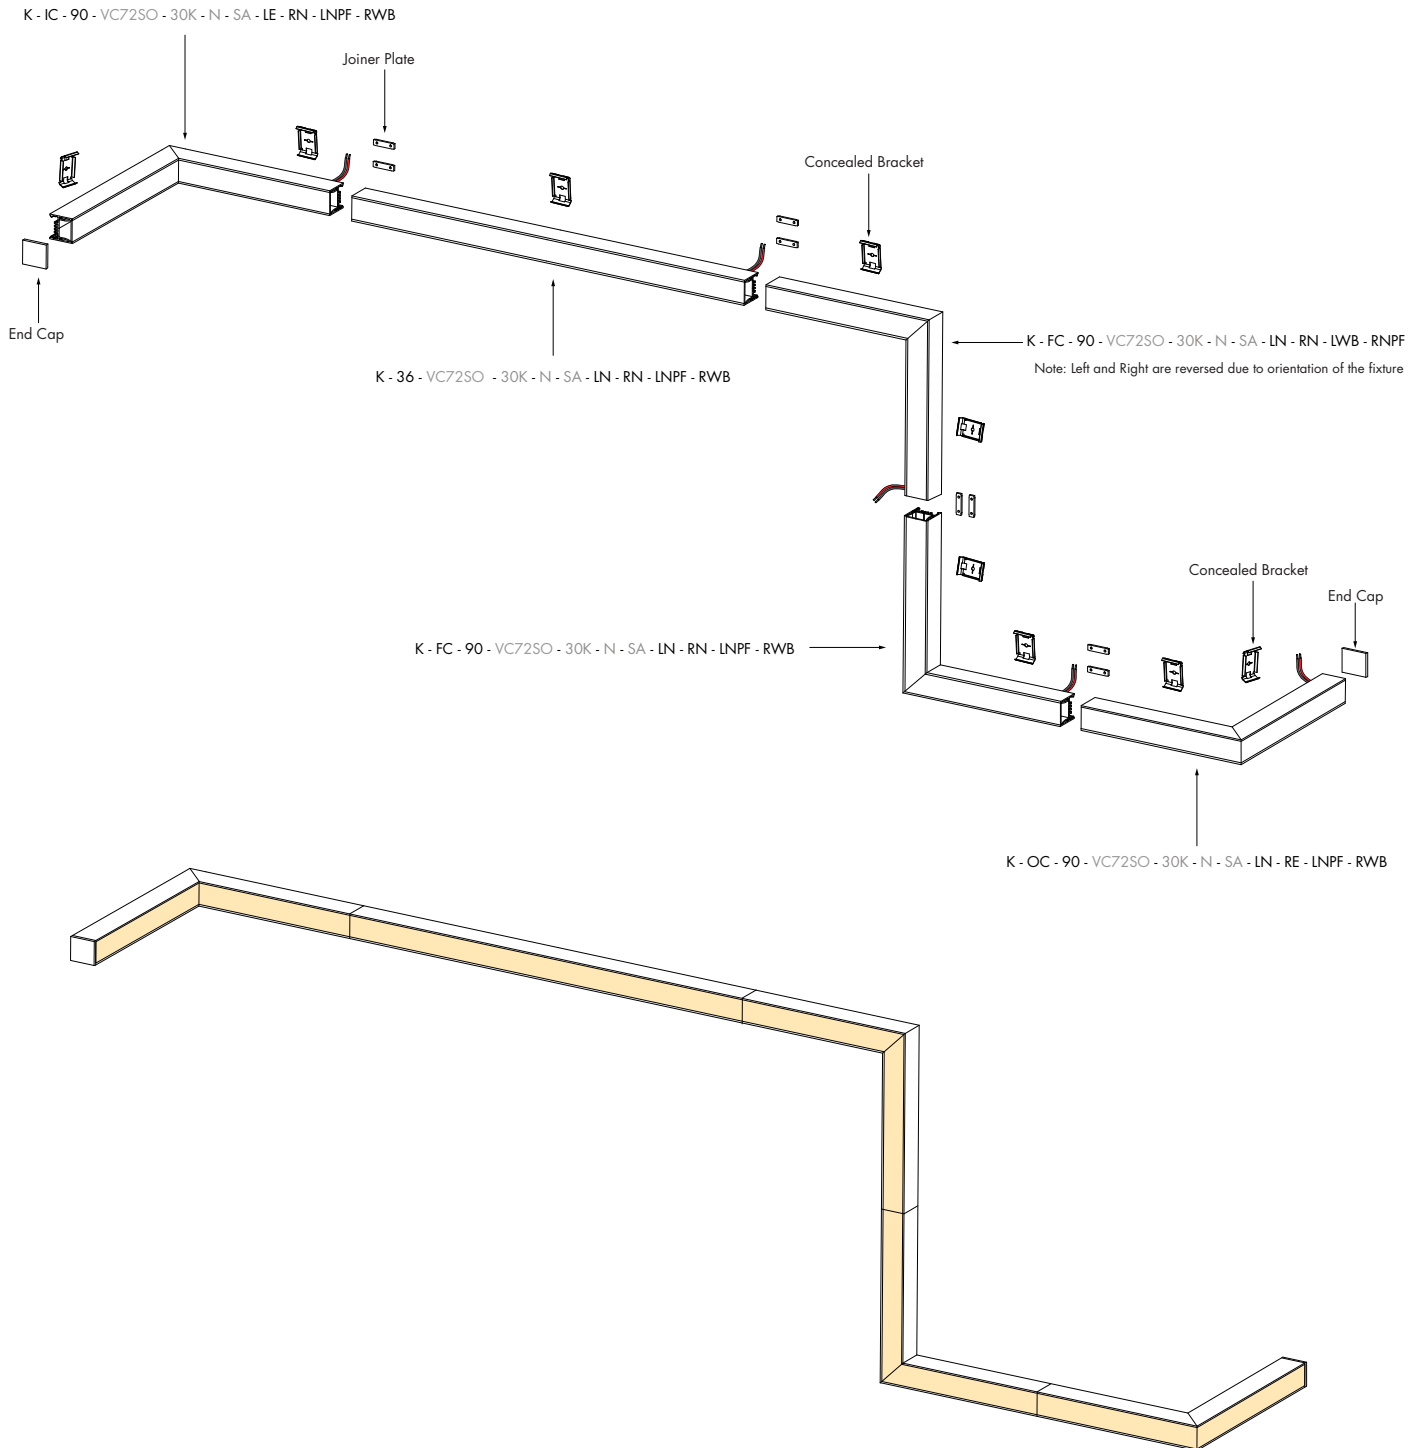

Light Transmission and Dotting


Output Options	Lens/Accessory							
	Clear Lens				Frosted Lens			
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%
VC72VLO	CD	CD	CD	CD	ND	ND	ND	ND
VC72LO	CD	CD	CD	CD	ND	ND	ND	ND
VC72SO	CD	CD	CD	CD	ND	ND	ND	ND
VC72MO	CD	CD	CD	CD	ND	ND	ND	ND
VC72HO	CD	CD	CD	CD	ND	ND	ND	ND
VC72VHO	CD	CD	CD	CD	ND	ND	ND	ND
HE64VLO	CD	CD	CD	CD	ND	ND	ND	ND
HE64LO	CD	CD	CD	CD	ND	ND	ND	ND
HE64SO	CD	CD	CD	CD	ND	ND	ND	ND
HE64MO	CD	CD	CD	CD	ND	ND	ND	ND
HE64HO	CD	CD	CD	CD	ND	ND	ND	ND
HE64VHO	CD	CD	CD	CD	ND	ND	ND	ND
<b>Transmission Percentage</b>	114%				100%			

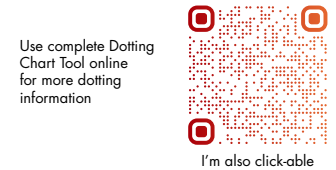

Photometry


K-48-VC72VHO-30K-C

Kilo, 4ft, VHO, 3000K, Clear Lens

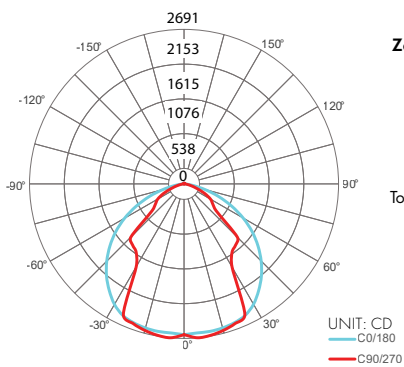

K-48-VC72VHO-30K-F

Kilo, 4ft, VHO, 3000K, Frosted Lens

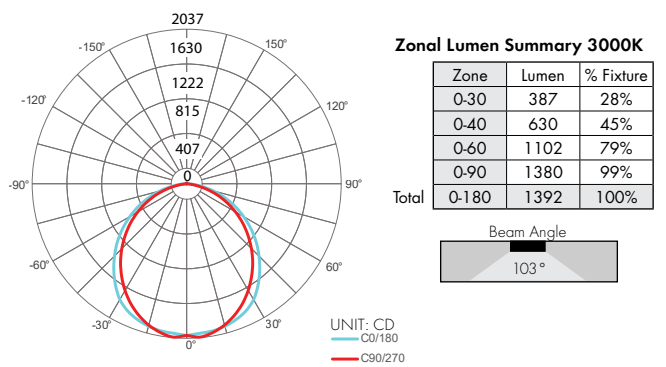

**Power Consumption**

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, output, and desired power feed to get a full power consumption table.



I'm also click-able

Desired Nominal Length: \_\_\_\_\_

Desired Output: \_\_\_\_\_

Desired CCT: \_\_\_\_\_

**Voltage Drop Calculator**

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White



#### Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming  
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
<b>Length</b>	6.50"	7.40"	8.66"	11.85"
<b>Width</b>	3.73"	3.73"	3.73"	4.32"
<b>Depth</b>	1.61"	1.61"	1.61"	1.81"

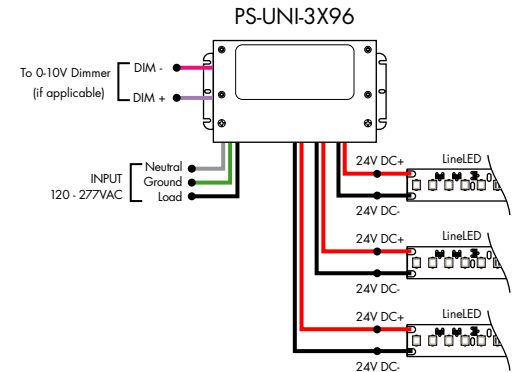
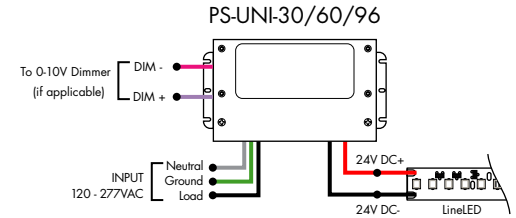


### For use with Static White

#### Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D-Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
<b>Length</b>	14.40"	15.00"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.45"

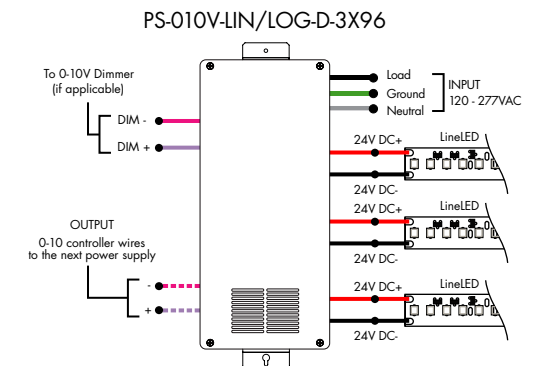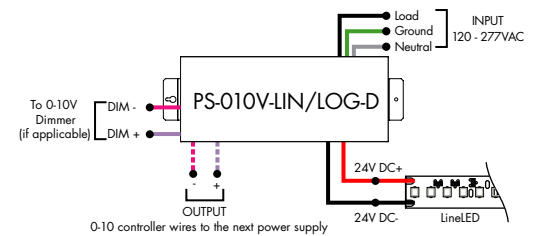


**Power Supplies**

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

**For use with Static White**

**Ordering Code - Athena 0-10V LED Driver**

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-LIN-0-10V Dimming (0.1%), Linear 010V-LOG-0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24-24 VDC	AWNR-Athena Wireless Node

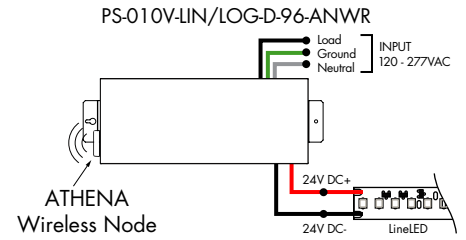


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

**For use with Static White**

**Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC**

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI2-DT6-DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24-24 VDC

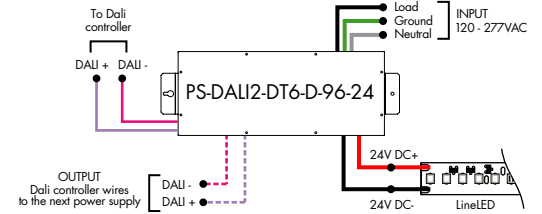


Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


**For use with Static White**

**Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC**

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI-DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

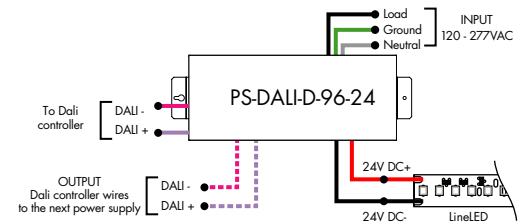

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

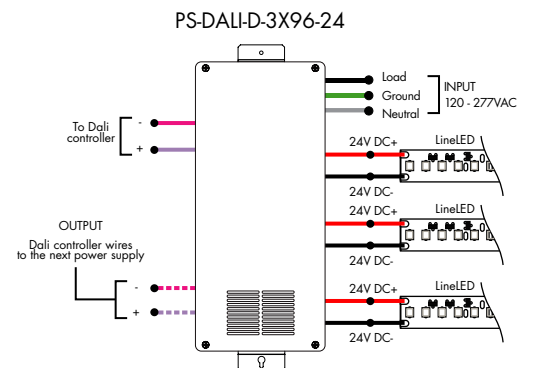

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



### For use with Static White

#### Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

ZONAL CONTROL POWER SUPPLIES.  
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

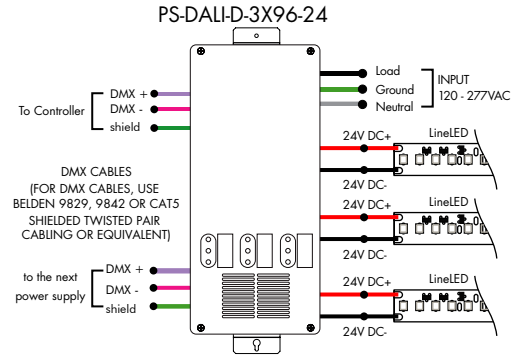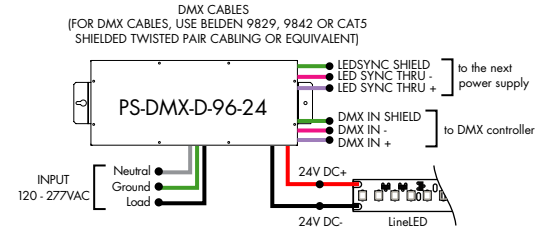


### For use with Static White

#### Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

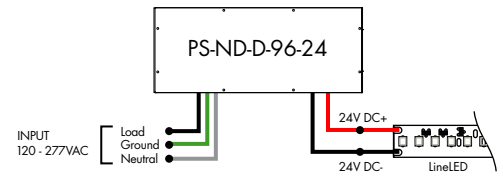


### For use with Static White

#### Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120-Power Supply, 120VAC PS240-Power Supply, 240VAC PS277-Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

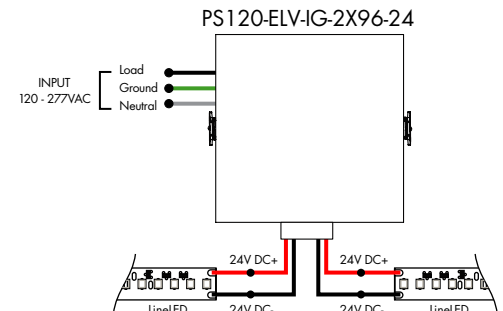

### Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

**L3DA4U1UKL-CV240**

HiLume™ 1% EcoSystem Voltage LED driver 40W max

MODELS	L3DA4U1UKL-CV240
<b>Length</b>	4.98"
<b>Width</b>	4.00"
<b>Depth</b>	2.62"

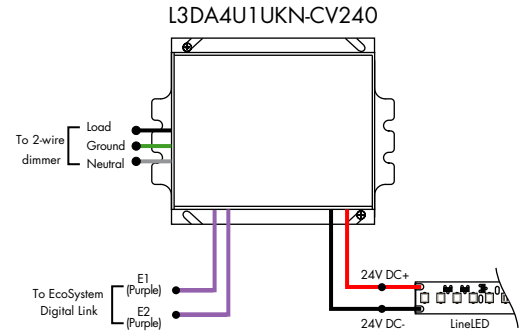

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

**L3D0-96W24V-U**

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

MODELS	L3D0
<b>Length</b>	10.50"
<b>Width</b>	5.50"
<b>Depth</b>	2.00"

