




Features

- Extruded aluminum linear suspension fixture utilizing double rows of LEDs with Power Over Aircraft cable.
- Includes 8' silver adjustable cable and two white finish canopies
- Requires two junction boxes for split output connection
- 24VDC Class 2 fixtures made to order up to 120"
- Class 2 listed for damp locations
- Dot free even illumination with frosted lens
- High Color Quality options offer premium quality and vibrant colors with R9 values up to 97.
- High Efficacy options offer best in class output and efficacy with over 1690 lm/ft and up to 119 lm/W
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Average Life (L70): 50,000hrs
- 7 year warranty



Finish Options (see page 2 for additional information)

- Base Silver Anodized
-
- Powder Coat Black Bronze White
-
- Premium Matte Black Warm Nickel Aged Brass Polished Gold Chrome



Technical Information

TYPE	High Color Quality			High Efficacy				High Efficacy
	72SO	72HO	72VHO	HE48LO	HE48SO	HE48MO	HE48HO	HE64VHO
OUTPUT OPTIONS								
Lumens Output (3000K) <small>(with a Frosted Lens)</small>	408 lm/ft	663 lm/ft	806 lm/ft	397 lm/ft	550 lm/ft	735 lm/ft	1179 lm/ft	1492 lm/ft
Average Power Consumption <small>(for a 4' section)</small>	5.6 W/ft	9.6 W/ft	12 W/ft	3.8 W/ft	5.6 W/ft	7 W/ft	13 W/ft	15 W/ft
Efficacy	73 lm/W	69 lm/W	67 lm/W	104 lm/W	98 lm/W	105 lm/W	91 lm/W	99 lm/W
Max Run Length <small>(in series)</small>	20 ft	16 ft	11 ft	24 ft	21 ft	17 ft	12 ft	8 ft
Ambient Operating Temperature Range*	-5°F - 125°F <small>(-20°C - 50°C)</small>			-5°F - 125°F <small>(-20°C - 50°C)</small>				-5°F - 115°F <small>(-20°C - 45°C)</small>

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

High Color Quality (72)

CCT	Multiplier <small>(reference - 3000K)</small>	TM-30			
		CRI	R _f	R _g	R ₉
1900K	0.55	96	94	97	90
2200K	0.70	96	95	101	89
2400K	0.72	98	97	101	91
2700K	0.74	97	96	101	91
3000K	1.00	97	95	104	97
3500K	1.02	97	94	105	97
4100K	1.07	97	90	99	97

High Efficacy (HE48/HE64)


CCT	Multiplier <small>(reference - 3000K)</small>	TM-30			
		CRI	R _f	R _g	R ₉
2200K	0.73	92	91	97	42
2500K	0.81	93	96	96	62
2700K	0.94	92	90	99	58
3000K	1.00	92	89	99	57
3500K	1.02	92	89	99	60
4000K	1.02	92	86	94	71

Ordering Code

MODEL	LENGTH ¹	OUTPUT ²	CCT	LENS	ENDCAP	LIGHT DIRECTION	FINISH ^{3,4}
KILOS - Kilo S Power Over Aircraft	12" - 120" 1" increments	72SO - Standard 72HO - High 72VHO - Very High	19K - 1900K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	F - Frosted C - Clear	A - Adjustable	U - Up D - Down	BASE SA - Silver Anodized POWDER COAT BK - Black BZ - Bronze WH - White PREMIUM MBK - Matte Black WN - Warm Nickel AB - Aged Brass PG - Polished Gold ⁵ CH - Chrome ⁵
	12" - 120" 2" increments	HE48LO - Low HE48SO - Standard HE48MO - Medium HE48HO - High HE64VHO - Very High	22K - 2200K 25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K				


1 - Custom lengths and increments are available, please consult factory with specific request.
 2 - All HE48 and HE64 options can be used to comply with Title 24 JA8. L72 options can be used to comply with Title 24 JA8 depending on Output, CCT, and Lens selections, see multiplier charts to calculate specific efficacies.
 3 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
 4 - White canopy included with all finishes except Black and Matte Black, which include a Black canopy.
 5 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".

Product Dimensions

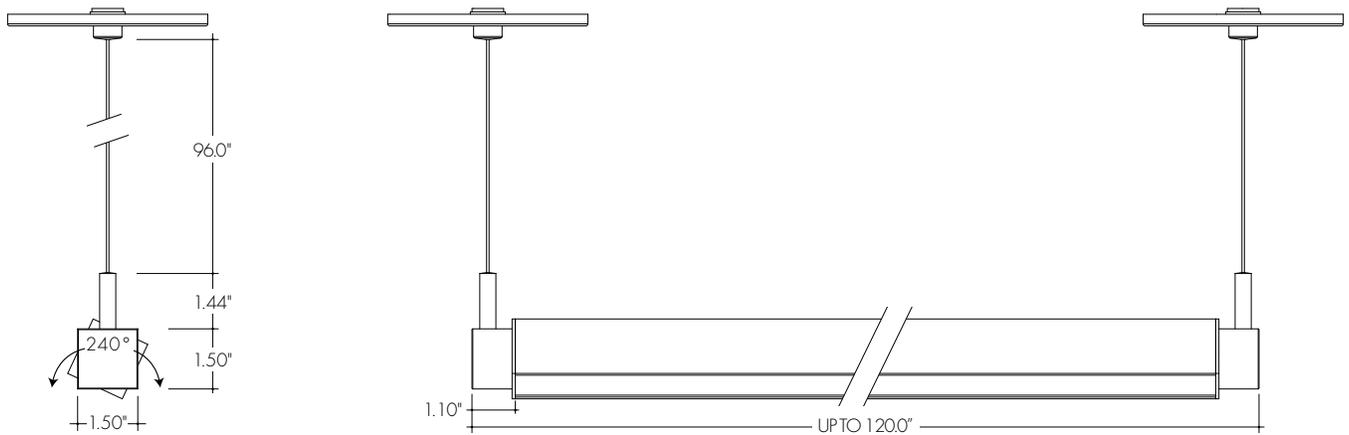


Finish Options

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Silver Anodized finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96”.
- Custom RALs are available, please consult Inside Sales with specific request.
- White canopy included with all finishes except Black and Matte Black, which include a Black canopy.

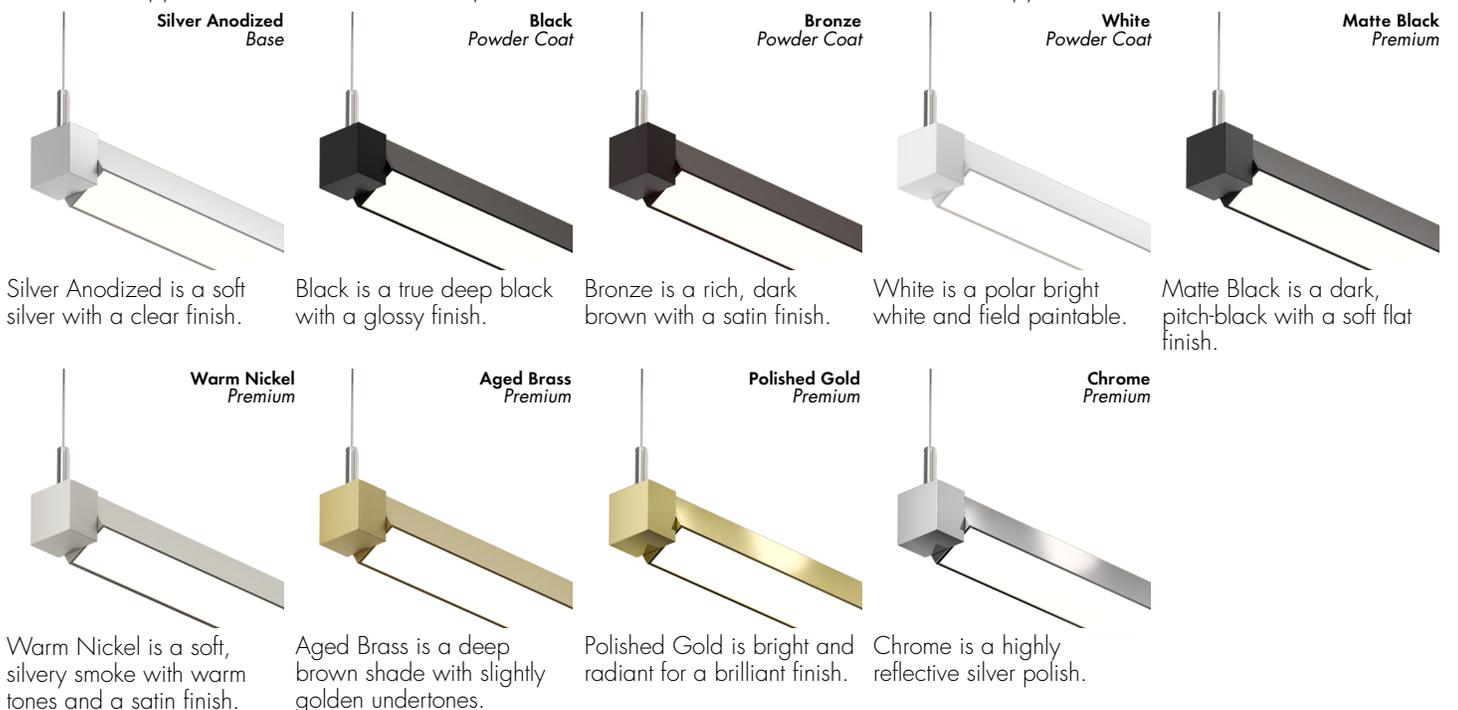


Light Transmission and Dotting

Output Options	Lens							
	Clear				Frosted			
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%
72SO	CD	CD	CD	CD	ND	ND	ND	ND
72HO	CD	CD	CD	CD	ND	ND	ND	ND
72VHO	CD	CD	CD	CD	ND	ND	ND	ND
HE48LO	CD	CD	CD	CD	ND	ND	ND	ND
HE48SO	CD	CD	CD	CD	ND	ND	ND	ND
HE48MO	CD	CD	CD	CD	ND	ND	ND	ND
HE48HO	CD	CD	CD	CD	ND	ND	ND	ND
HE64VHO	CD	CD	CD	CD	ND	ND	ND	ND
Transmission Percentage	114%				100%			

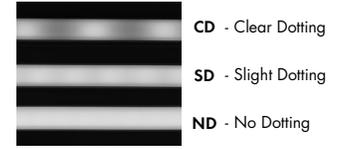

Photometry

KiloSPOA-48-72VHO-30K-C
Kilo S POA, 4ft, 3000K, VHO, Clear Lens

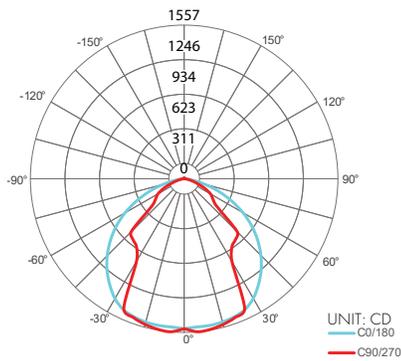

Zonal Lumen Summary 3000K


Zone	Lumen	% Fixture
0-30	1224	33.4%
0-40	1930	52.7%
0-60	3125	85.3%
0-90	3635	99.2%
0-180	3664	100%

Total



UNIT: CD
C0/180
C90/270

KiloS POA-48-72VHO-30K-F
Kilo S POA, 4ft, 3000K, VHO, Frosted Lens

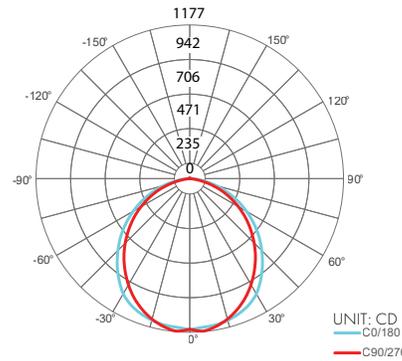

Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	895	27.8%
0-40	1459	45.3%
0-60	2552	79.2%
0-90	3196	99.2%
0-180	3223	100%

Total



UNIT: CD
C0/180
C90/270

Power Consumption

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

High Color Quality (72)

Nominal Length (in)	Actual Length	Watts			Nominal Length (in)	Actual Length	Watts			Nominal Length (in)	Actual Length	Watts			Nominal Length (in)	Actual Length	Watts		
		SO	HO	VHO															
12	11 4/16	4.8	8.1	11.0	47	46	20.4	32.5	41.9	82	81 14/16	34.5	53.3	68.2	117	116 10/16	47.2	69.9	88.1
13	12 7/16	5.3	9.0	12.1	48	47 3/16	21.1	33.6	43.1	83	—	—	—	—	118	117 13/16	47.5	70.4	88.6
14	13 9/16	5.8	9.8	13.1	49	48 5/16	21.5	34.2	43.8	84	83 1/16	34.8	53.9	69.4	119	118 15/16	47.8	70.8	89.1
15	14 12/16	6.5	10.9	14.5	50	49 8/16	22.0	34.9	44.6	85	84 3/16	35.4	54.6	71.4	120	—	—	—	—
16	15 14/16	6.9	11.6	15.5	51	50 10/16	22.5	35.9	45.9	86	85 6/16	35.7	55.1	72.2					
17	—	—	—	—	52	51 13/16	22.9	36.5	46.7	87	86 8/16	36.1	55.6	72.7					
18	17 1/16	7.3	12.3	16.5	53	52 15/16	23.3	37.1	47.5	88	87 11/16	36.7	56.4	73.3					
19	18 3/16	8.0	13.4	17.9	54	—	—	—	—	89	88 14/16	37.1	56.9	73.7					
20	19 6/16	8.4	14.2	18.9	55	54 2/16	23.9	38.1	48.8	90	—	—	—	—					
21	20 8/16	8.9	14.9	19.8	56	55 4/16	24.3	38.7	49.6	91	90	37.5	57.3	74.2					
22	21 11/16	9.6	16.0	21.2	57	56 7/16	24.8	39.3	50.4	92	91 3/16	38.1	58.1	74.9					
23	22 13/16	10.0	16.7	22.1	58	57 9/16	25.2	39.9	51.2	93	92 5/16	38.5	58.7	75.6					
24	—	—	—	—	59	58 12/16	25.9	40.8	52.4	94	93 8/16	38.9	59.4	76.3					
25	24	10.5	17.4	23.1	60	59 14/16	26.3	41.4	53.2	95	94 10/16	39.6	60.3	77.3					
26	25 3/16	11.1	18.6	24.4	61	—	—	—	—	96	95 13/16	40.0	60.9	78.0					
27	26 5/16	11.6	19.3	25.3	62	61 1/16	26.7	42.0	54.0	97	96 15/16	40.4	61.5	78.7					
28	27 8/16	12.1	20.1	26.1	63	62 3/16	27.3	42.9	55.0	98	—	—	—	—					
29	28 10/16	12.8	21.3	27.4	64	63 6/16	27.7	43.4	55.7	99	98 2/16	40.9	62.1	79.1					
30	29 13/16	13.3	22.0	28.3	65	64 8/16	28.1	43.9	56.4	100	99 4/16	41.2	62.5	79.3					
31	30 15/16	13.8	22.8	29.1	66	65 11/16	28.7	44.7	57.4	101	100 7/16	41.6	62.8	79.5					
32	—	—	—	—	67	66 14/16	29.1	45.3	58.1	102	101 9/16	41.9	63.2	79.8					
33	32 2/16	14.5	23.8	30.5	68	—	—	—	—	103	102 12/16	42.4	63.8	80.1					
34	33 4/16	14.9	24.4	31.4	69	68	29.5	45.7	58.7	104	103 14/16	42.8	64.3	80.7					
35	34 7/16	15.3	25.0	32.4	70	69 3/16	30.0	46.3	59.7	105	—	—	—	—					
36	35 9/16	15.8	25.7	33.3	71	70 5/16	30.3	46.8	60.3	106	105 1/16	43.2	64.8	81.3					
37	36 12/16	16.4	26.6	34.7	72	71 8/16	30.7	47.2	61.0	107	106 3/16	43.8	65.5	82.2					
38	37 14/16	16.8	27.3	35.5	73	72 10/16	31.2	47.8	61.9	108	107 6/16	44.2	66.0	82.8					
39	—	—	—	—	74	73 13/16	31.6	48.5	62.3	109	108 8/16	44.6	66.5	83.4					
40	39 1/16	17.3	27.9	36.3	75	74 15/16	32.0	49.1	62.7	110	109 11/16	45.1	67.1	84.3					
41	40 3/16	17.9	28.9	37.6	76	—	—	—	—	111	110 14/16	45.4	67.5	84.9					
42	41 6/16	18.3	29.5	38.4	77	76 2/16	32.5	50.1	63.3	112	—	—	—	—					
43	42 8/16	18.7	30.1	39.2	78	77 4/16	32.9	50.8	63.7	113	112	45.7	67.9	85.5					
44	43 11/16	19.4	31.1	40.4	79	78 7/16	33.3	51.4	64.1	114	113 3/16	46.1	68.4	86.3					
45	44 14/16	19.9	31.8	41.1	80	79 9/16	33.6	52.0	64.9	115	114 5/16	46.4	68.8	86.9					
46	—	—	—	—	81	80 12/16	34.2	52.8	66.9	116	115 8/16	46.7	69.2	87.4					

Power Consumption

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

High Efficacy (HE48)

Nominal Length (in)	Actual Length	Watts				Nominal Length (in)	Actual Length	Watts				Nominal Length (in)	Actual Length	Watts				Nominal Length (in)	Actual Length	Watts			
		LO	SO	MO	HO			LO	SO	MO	HO			LO	SO	MO	HO			LO	SO	MO	HO
12	11 13/16	3.4	4.9	6.4	13.2	47	-	-	-	-	82	-	-	-	-	117	116 3/16	34.0	53.8	66.3	90.4		
13	-	-	-	-	-	48	47 4/16	14.3	22.6	27.5	47.9	83	82 11/16	22.6	38.4	47.6	78.5	118	-	-	-	-	
14	13 13/16	4.1	5.9	7.5	15.8	49	-	-	-	-	84	-	-	-	-	119	118 2/16	34.7	54.7	67.4	90.9		
15	-	-	-	-	-	50	49 4/16	14.7	23.3	28.5	49.4	85	84 11/16	22.8	39.3	48.8	79.4	120	-	-	-	-	
16	15 12/16	4.8	6.9	8.7	17.9	51	-	-	-	-	86	-	-	-	-	-	-	-	-	-	-		
17	-	-	-	-	-	52	51 3/16	15.3	24.1	29.6	51.3	87	86 10/16	23.1	40.1	49.9	80.3	-	-	-	-	-	
18	17 12/16	5.4	7.7	9.6	19.5	53	-	-	-	-	88	-	-	-	-	-	-	-	-	-	-		
19	-	-	-	-	-	54	53 3/16	15.8	25.0	30.7	53.2	89	88 10/16	23.3	41.0	51.0	81.2	-	-	-	-	-	
20	19 11/16	6.0	8.7	10.8	21.5	55	-	-	-	-	90	-	-	-	-	-	-	-	-	-	-		
21	-	-	-	-	-	56	55 2/16	16.4	25.9	31.9	55.2	91	90 9/16	23.5	41.9	52.1	82.0	-	-	-	-	-	
22	21 11/16	6.4	9.7	12.0	23.1	57	-	-	-	-	92	-	-	-	-	-	-	-	-	-	-		
23	-	-	-	-	-	58	57 2/16	17.0	26.8	33.1	57.0	93	92 9/16	24.0	42.9	53.4	82.7	-	-	-	-	-	
24	23 10/16	6.9	10.7	13.3	24.7	59	-	-	-	-	94	-	-	-	-	-	-	-	-	-	-		
25	-	-	-	-	-	60	59 1/16	17.5	27.7	34.3	58.7	95	94 8/16	24.6	43.8	54.7	83.3	-	-	-	-	-	
26	25 10/16	7.4	11.7	14.5	26.3	61	-	-	-	-	96	-	-	-	-	-	-	-	-	-	-		
27	-	-	-	-	-	62	61 1/16	18.1	28.6	35.5	60.5	97	96 8/16	25.2	44.8	56.0	84.0	-	-	-	-	-	
28	27 9/16	8.0	12.9	15.7	28.5	63	-	-	-	-	98	-	-	-	-	-	-	-	-	-	-		
29	-	-	-	-	-	64	63	18.4	29.5	36.6	63.8	99	98 7/16	26.1	45.8	57.0	84.6	-	-	-	-	-	
30	29 9/16	8.7	14.0	17.0	30.6	65	65	18.8	30.4	37.7	67.0	100	-	-	-	-	-	-	-	-	-		
31	-	-	-	-	-	66	-	-	-	-	101	100 7/16	27.1	46.7	58.0	85.2	-	-	-	-	-		
32	31 8/16	9.4	15.2	18.2	32.6	67	66 15/16	19.1	31.2	38.9	70.2	102	-	-	-	-	-	-	-	-	-		
33	-	-	-	-	-	68	-	-	-	-	103	102 6/16	28.1	47.7	58.9	85.9	-	-	-	-	-		
34	33 8/16	10.0	16.1	19.2	34.7	69	68 15/16	19.5	32.3	40.0	71.2	104	-	-	-	-	-	-	-	-	-		
35	-	-	-	-	-	70	-	-	-	-	105	104 6/16	28.8	48.6	60.0	86.5	-	-	-	-	-		
36	35 7/16	10.7	17.0	20.3	36.7	71	70 14/16	20.0	33.3	41.1	72.3	106	-	-	-	-	-	-	-	-	-		
37	-	-	-	-	-	72	-	-	-	-	107	106 5/16	29.4	49.6	61.1	87.1	-	-	-	-	-		
38	37 7/16	11.3	17.9	21.4	38.7	73	72 14/16	20.4	34.4	42.3	73.4	108	-	-	-	-	-	-	-	-	-		
39	-	-	-	-	-	74	-	-	-	-	109	108 5/16	30.0	50.6	62.2	87.7	-	-	-	-	-		
40	39 6/16	11.9	18.9	22.7	40.5	75	74 13/16	21.0	35.2	43.4	74.6	110	-	-	-	-	-	-	-	-	-		
41	-	-	-	-	-	76	-	-	-	-	111	110 4/16	31.0	51.4	63.3	88.4	-	-	-	-	-		
42	41 6/16	12.5	19.9	23.9	42.2	77	76 13/16	21.5	36.0	44.5	75.7	112	-	-	-	-	-	-	-	-	-		
43	-	-	-	-	-	78	-	-	-	-	113	112 4/16	31.9	52.0	64.1	89.0	-	-	-	-	-		
44	43 5/16	13.1	20.8	25.1	44.1	79	78 12/16	22.1	36.8	45.7	76.9	114	-	-	-	-	-	-	-	-	-		
45	-	-	-	-	-	80	-	-	-	-	115	114 3/16	33.0	52.9	65.2	89.8	-	-	-	-	-		
46	45 5/16	13.7	21.7	26.3	46.0	81	80 12/16	22.3	37.5	46.5	77.6	116	-	-	-	-	-	-	-	-	-		

Power Consumption

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

High Efficacy (HE64)

Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts
		VHO			VHO			VHO
12	11 1/16	12.6	47	—	—	82	—	—
13	12 10/16	14.5	48	47 7/16	58.2	83	82 4/16	91.5
14	—	—	49	48 15/16	60.1	84	83 12/16	92.1
15	14 2/16	16.4	50	—	—	85	—	—
16	15 10/16	18.2	51	50 7/16	62.0	86	85 5/16	92.7
17	—	—	52	52	63.8	87	86 13/16	93.3
18	17 2/16	20.1	53	—	—	88	—	—
19	18 11/16	22.0	54	53 8/16	65.6	89	88 5/16	94.0
20	—	—	55	55	67.4	90	89 13/16	94.6
21	20 3/16	23.9	56	—	—	91	—	—
22	21 11/16	25.7	57	56 8/16	69.6	92	91 5/16	95.2
23	—	—	58	—	—	93	92 14/16	95.8
24	23 3/16	27.6	59	58	71.2			
25	24 11/16	29.5	60	59 9/16	72.8			
26	—	—	61	—	—			
27	26 4/16	31.4	62	61 1/16	74.4			
28	27 12/16	33.3	63	62 9/16	75.6			
29	—	—	64	—	—			
30	29 4/16	35.2	65	64 1/16	76.8			
31	30 12/16	37.2	66	65 10/16	78.0			
32	—	—	67	—	—			
33	32 5/16	39.1	68	67 2/16	79.2			
34	33 13/16	41.0	69	68 10/16	80.3			
35	—	—	70	—	—			
36	35 5/16	42.9	71	70 2/16	81.3			
37	36 13/16	44.9	72	71 10/16	82.4			
38	—	—	73	—	—			
39	38 5/16	46.7	74	73 3/16	83.4			
40	39 14/16	48.6	75	74 11/16	85.1			
41	—	—	76	—	—			
42	41 6/16	50.4	77	76 3/16	86.8			
43	42 14/16	52.3	78	77 11/16	88.5			
44	—	—	79	—	—			
45	44 6/16	54.2	80	79 4/16	90.2			
46	45 15/16	56.2	81	80 12/16	90.8			

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Power Supplies



See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code Universal Dimming Power Supplies 1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI-0-10V Dimming, Phase Dimming	D-Dry W-Wet	30-30 Watts 60-60 Watts 96-96 Watts 3x96-3x96 Watts	24-24 VDC

Compatibility: View a complete list of compatible dimmers on product page [\(Link\)](#)

0-10V - 1% dimming
MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart

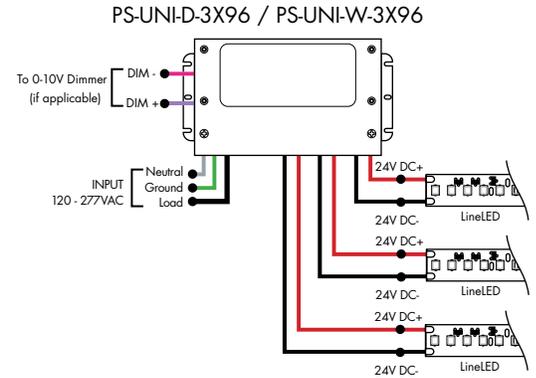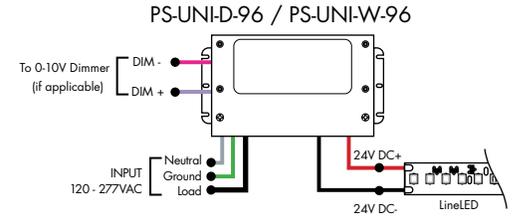



MODELS	PS-UNI-W-30W	PS-UNI-W-60W	PS-UNI-W-96W	PS-UNI-W-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

MODELS	PS-UNI-D-30W	PS-UNI-D-60W	PS-UNI-D-96W	PS-UNI-D-3X96W
Length	8.77"	8.77"	8.11"	9.94"
Width	4.27"	4.27"	5.60"	7.61"
Depth	1.83"	1.83"	1.83"	2.02"

Ordering Code 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	010V-LIN-0-10V Dimming (0.1%), Linear 010V-LOG-0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts 3X96-3x96 Watts	24-24 VDC


MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

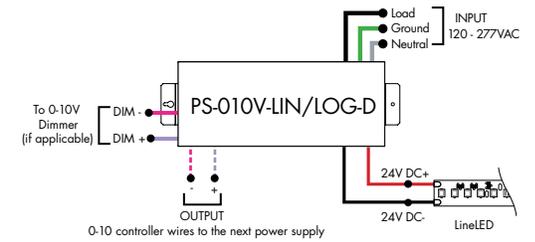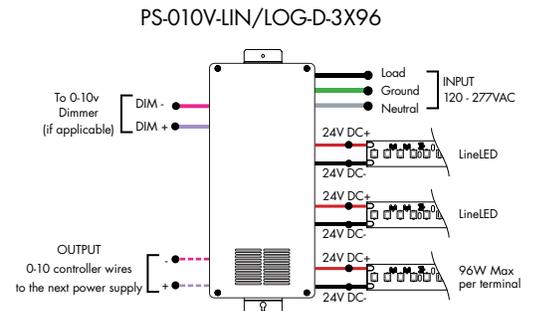

Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-LIN-0-10V Dimming, Linear 010V-LOG-0-10V Dimming, Logarithmic	D-Dry	96-96 W	24-24 VDC	AWNR-Athena

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

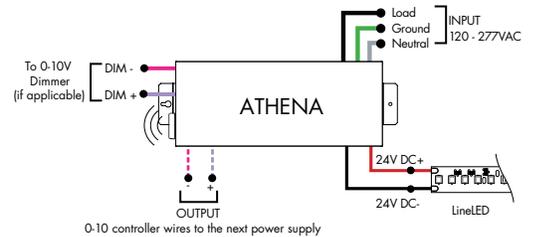


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code DALI1 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI-DALI (0.1%)	D-Dry	96-96 Watts 3X96-3X96 Watts	24-24 VDC

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

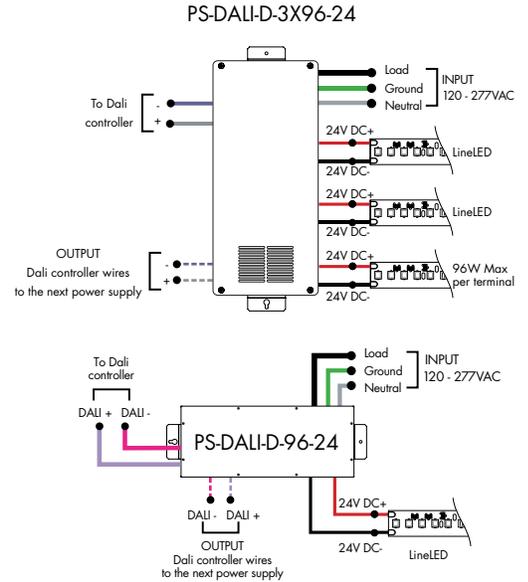


Ordering Code DMX Dimming Power Supplies 0.1% 120VAC - 277VAC Requires Zonal Control

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3X96-3X96 Watts	24-24 VDC

*Zonal control power supplies. Control multiple tapes/zones using DMX channels.


MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

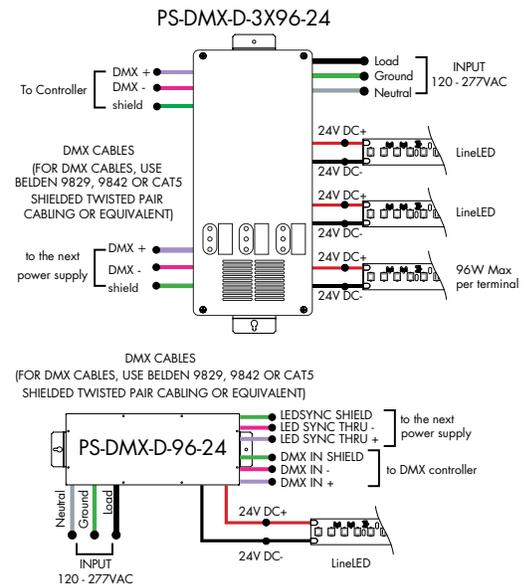

Ordering Code Enlightened Enabled Dimming Power Supplies 1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS-Power Supply, 120-277VAC	010V-0-10V Dimming (1%)	D-Dry	96-96 Watts	24-24 VDC	ENL-0-10V Enlightened

Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"

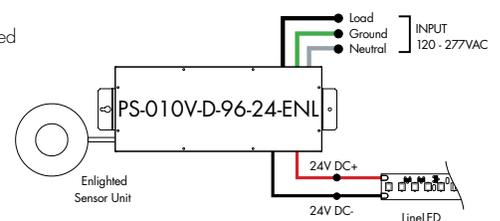


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code Non-Dimming Power Supply 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	ND - Non Dimming	D - Dry	96-96 Watts	24 - 24 VDC

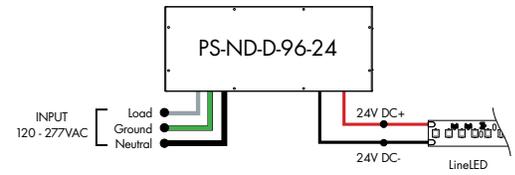

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code Phase Dimming Power Supply 1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	OUTPUT CONTROL
PS - Power Supply, 120-277VAC	PH - Phase Dimming (Triac, ELV, MLV)	D - Dry	96-96 Watts	24-24 VDC	DC - Direct Current

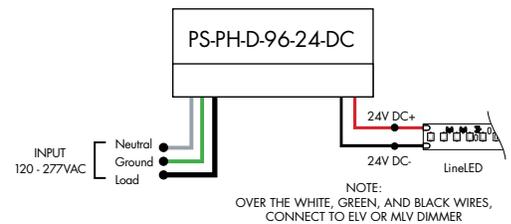


MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart ([link](#))

MODELS	96W
Length	8.25"
Width	4.10"
Depth	1.56"

Ordering Code In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120 - Power Supply, 120VAC PS240 - Power Supply, 240VAC PS277 - Power Supply, 277VAC	ELV - ELV Dimming (1%)	IG - In Ground	2X96-2X96 Watts	24-24 VDC

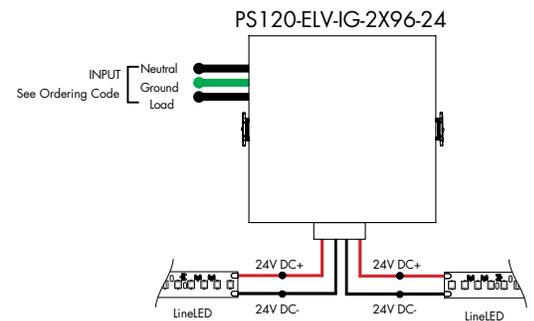

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver
40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

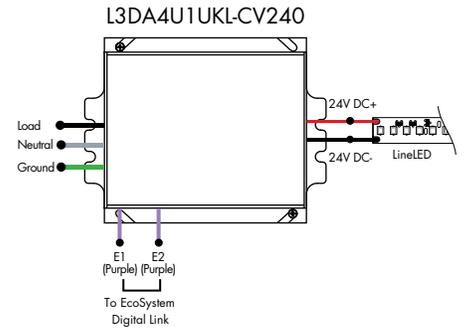

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™
96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

