


Kurba Large Pool Horizontal and Vertical Static White

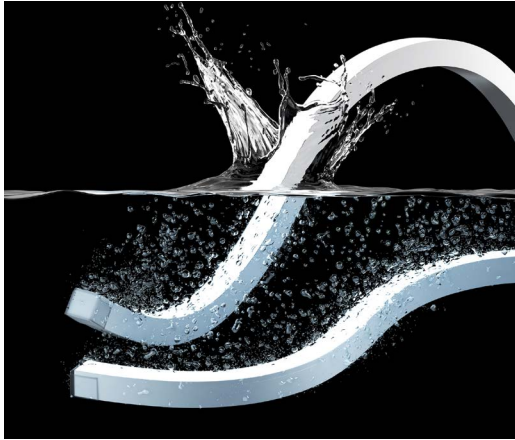

Features

Kurba Large is a UL676 Pool Rated light strip with a sleek, direct view profile. Suitable for submersion max 1.8m deep and capable of horizontal/side and vertical/top bends up to 300mm diameter. Built with robust factory made power feeds or end caps using UL676 Pool Rated SJTW cabling, Kurba Large Pool Rated mounts to a specifically designed thick plastic channel.

Applications

Indoor/Outdoor wet & submerged location

Materials

PVC Material for high chlorine resistance

Dimming

Dimable down to 1%. Dot Free even illumination. Also available with Black Lens

Average Life (L70)



50,000 hours

Approvals

CE, UKCA, UL676, Class 2, IP68

Warranty

5 years



Finish Options (see page 2 for additional information)

Base ☐ White

Premium ☒ Black



Technical Information

Bending Direction	Horizontal		Vertical	
Output	MO	HO (Black Lens only)	MO	MO (Black Lens only)
Light Output at 3000K, 80CRI	531 lm/m	148 lm/m	600 lm/m	187 lm/m
Average Power Consumption	12 W/m	15 W/m	12 W/m	12 W/m
Efficacy	44 lm/W	10 lm/W	50 lm/W	16 lm/W
Ordering Increment	55.56 mm	55.56 mm	55.56 mm	55.56 mm
Maximum Run Length (In Series)	8.0 m	6.4 m	8.0 m	8.0 m
Operating Temperature Range	-20°C to 35°C	-20°C to 35°C	-20°C to 35°C	-20°C to 35°C

CCT INFO / LUMEN MULTIPLIER (ref. -3000K)

Bending Direction	Horizontal	Vertical
CRI	80 CRI	80 CRI
2200K	0.84	0.83
2400K	0.96	0.97
2700K	0.96	0.97
3000K	1.00	1.00
3500K	1.09	1.08
4000K	1.07	1.07

Ordering Code

MODEL	BEND DIRECTION	LENGTH	OUTPUT ¹	CCT	CRI	LENS	MOUNTING	FINISH	FEED POSITION LEFT	FEED POSITION RIGHT
KBL-PL - Kurba Large Pool	HB - Horizontal Bending VB - Vertical Bending	SEE PAGE 5 - 7	MO - Medium HO - High	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	R80 - 80CRI	F-PVC Frosted	NA - See Page 4 for orderable mounting accessories	WH - White	DUAL INJECTION MOLD DME - End Feed 1 DMB - Back Feed 1 DMSA - Side A Feed DMSB - Side B Feed ² NPF - No Power Feed ³	DUAL INJECTION MOLD DME - End Feed 1 DMB - Back Feed 1 DMSA - Side A Feed DMSB - Side B Feed ² NPF - No Power Feed ³
BLACK LENS ⁴										
			MO - Medium HO - High	27K - 2700K 40K - 4000K	R80 - 80CRI	BL - Black Lens	NA - See Page 4 for orderable mounting accessories	BK - Black		

Feeds come with 9m wire leads

1 - 38MO Not Available for Horizontal Bending, 38HO Not Available for Vertical Bending
2 - DMSB - Side B Feed not available with HB - Horizontal Bending

3 - NPF-NPF for Feed Position 1&2 is not a valid configuration option

4 - 100 meter minimum order. Additional charges will apply if order less than 100 meter.




Kurba Large Pool Horizontal and Vertical Static White




Powerfeeds and Connectors

Power Feed Position Options and Orientation

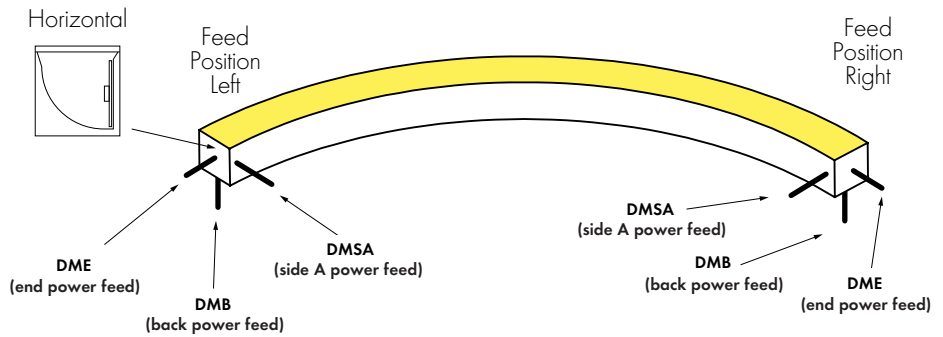

NOTE: IMSB - Side 2 Feed not available with HB - Horizontal Bending


Horizontal Bend Direction



Illuminated surface shown in gray


Horizontal Prohibited Bends

Twisting or bending LED in these positions will cause damage




Illuminated surface shown in gray

Do not make sharp bends near the endcap

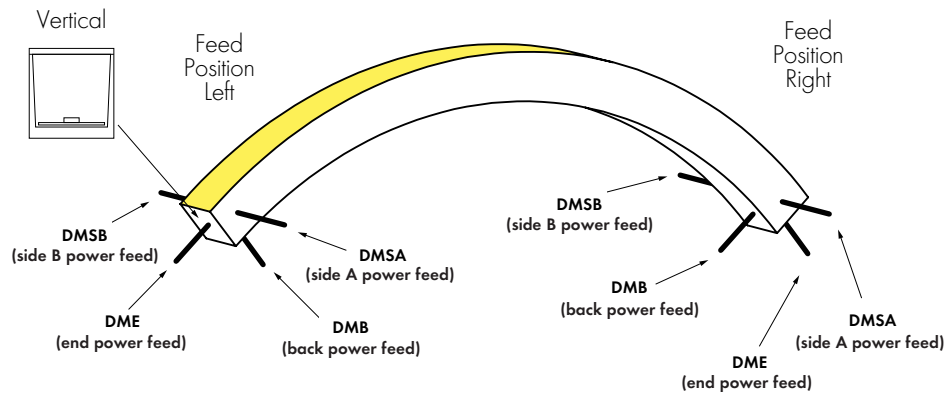

Vertical Bend Direction


Bend LED in these positions only to avoid damage

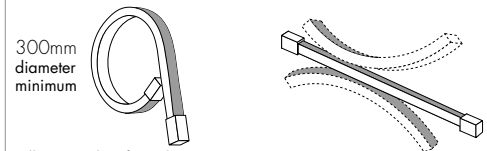

Illuminated surface shown in gray

Vertical Prohibited Bends

Twisting or bending LED in these positions will cause damage




Illuminated surface shown in gray

Do not make sharp bends near the endcap

Linking and Extension Cable Options


END CONNECTOR

Injection-molded End Connector
-IME

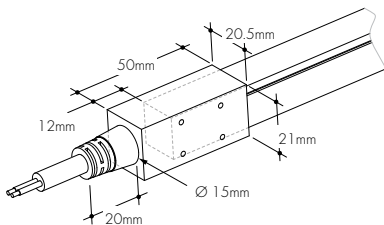


BACK CONNECTOR

Injection-molded Back Connector
-IMB




SIDE CONNECTOR

Injection-molded Side Connector
-MSA and -MSB




ENDCAP (NO CONNECTOR)

Injection-molded Cap (No Connector)
-NPF



ANTI-WICKING FERRULE


Included on every power feed wire



Kurba Large Pool Horizontal and Vertical Static White



Product Dimensions

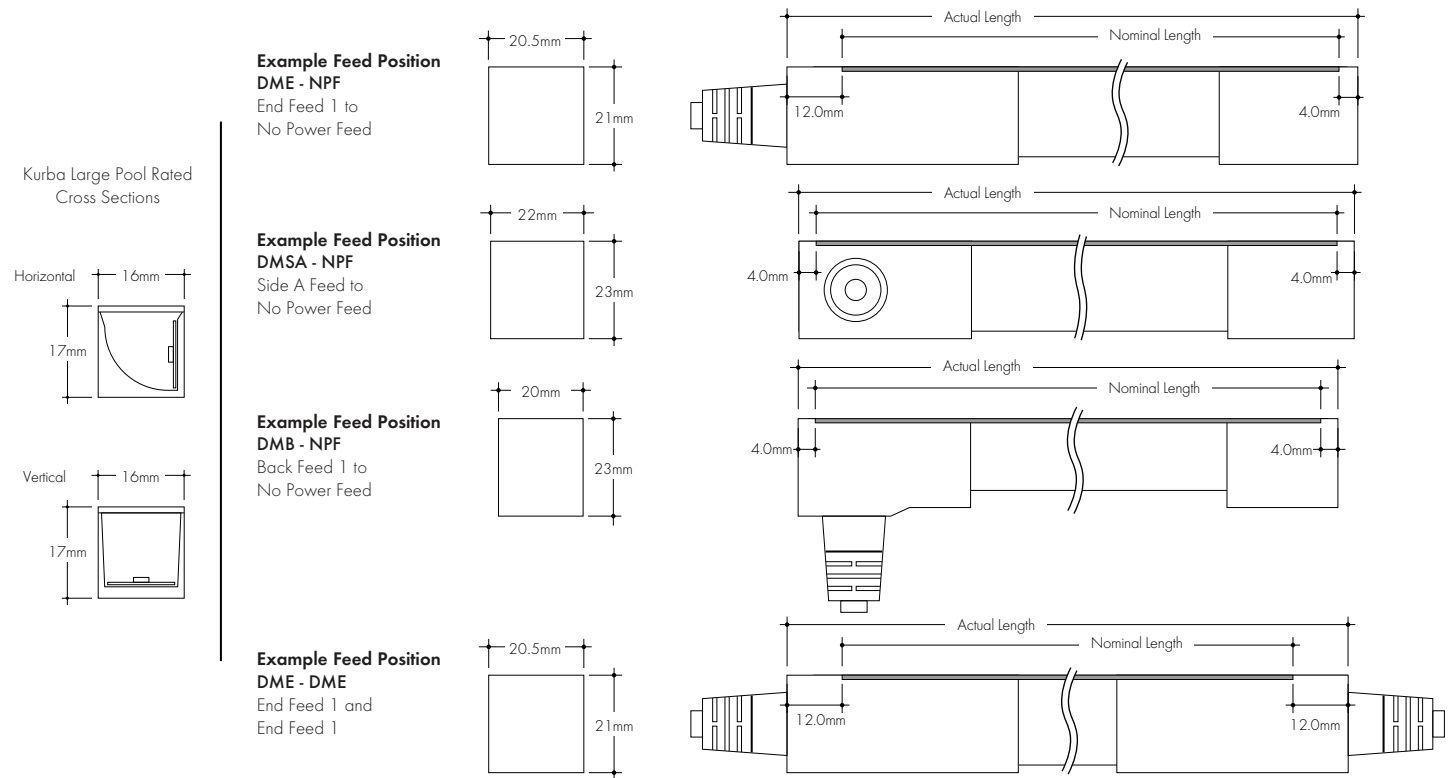

Finish Options

- A wide variety of finish options allowing complete customization of style and aesthetic.

White Base



Kurba's base finish is a crisp white which brings a timeless, clean aesthetic that brightens and enhances any space

Black Finish w/ Black Lens Premium




Also available with a blackout aesthetic - the Black Lens paired with the Black Finish provides for a sleek, all black profile that keeps the strip concealed in the off-state.



Light Transmission and Dotting

Output Options	Lens/Accessory		
	Silicone Frosted/ White Finish	Black Lens/Black Finish (Horizontal Bend)	Black Lens/Black Finish (Vertical Bend)
MO	ND	N/A	N/A
MO	N/A	ND	ND
HO	N/A	ND	ND
Transmission Percentage	100%	27%	30%




CD SD ND
CD - Clear Dotting
SD - Slight Dotting
ND - No Dotting

Mounting Accessories and Optional Connectors

MC-NFP-KBL-2M
Thickened Plastic Mounting Channel for
underwater application, 2m




MC-KBL-BANP-3D-SM-1M-XX
KBL Mounting Channel, Bendable Silicone Profile,
3D Bending, Surface Mount, 1m, 300mm bending
diameter

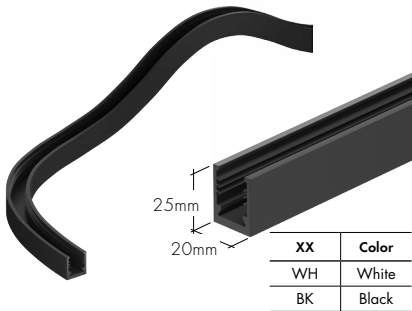


Includes 12 mounting screws

LVSP-IP66
Splice box: wet rated, low voltage, gray, IP66



LVSP-IP66-CM
Connector for splice box, low voltage for cable
management, gray, IP66



MO | Orderable Length Chart

Use Actual Length for Order Code Entry

Tolerance for Actual Lengths less than 1.8m is +/- 5mm, Actual Lengths between 1.8m and 4.8m is +/- 7.6mm, and Actual Lengths greater than 4.8m is +/- 15mm

A - End Connector at both ends of Kurba (12mm + 12mm added to overall length)


B - End Connector at one end of Kurba and No Connector or Back Connector or Side Connector at other end of Kurba (12mm + 4mm added to overall length)

C - Any combination of No Connector, Back Connector, or Side Connector on each end of Kurba (4mm + 4mm added to overall length)


Nominal Length (m)	Actual Length (m)			Nominal Length (m)	Actual Length (m)			Nominal Length (m)	Actual Length (m)			Nominal Length (m)	Actual Length (m)		
	A	B	C		A	B	C		A	B	C		A	B	C
0.20	0.246	0.238	0.230	2.20	2.246	2.238	2.230	4.20	4.247	4.239	4.231	6.20	6.247	6.239	6.231
0.30	0.302	0.294	0.286	2.30	2.302	2.294	2.286	4.30	4.302	4.294	4.286	6.30	6.302	6.294	6.286
0.35	0.357	0.349	0.341	2.35	2.358	2.350	2.342	4.35	4.358	4.350	4.342	6.35	6.358	6.350	6.342
0.40	0.413	0.405	0.397	2.40	2.413	2.405	2.397	4.40	4.413	4.405	4.397	6.40	6.413	6.405	6.397
0.45	0.468	0.460	0.452	2.45	2.469	2.461	2.453	4.45	4.469	4.461	4.453	6.45	6.469	6.461	6.453
0.50	0.524	0.516	0.508	2.50	2.524	2.516	2.508	4.50	4.524	4.516	4.508	6.50	6.525	6.517	6.509
0.55	0.580	0.572	0.564	2.55	2.580	2.572	2.564	4.55	4.580	4.572	4.564	6.55	6.580	6.572	6.564
0.60	0.635	0.627	0.619	2.60	2.635	2.627	2.619	4.60	4.635	4.627	4.619	6.60	6.636	6.628	6.620
0.65	0.691	0.683	0.675	2.65	2.691	2.683	2.675	4.65	4.691	4.683	4.675	6.65	6.691	6.683	6.675
0.70	0.746	0.738	0.730	2.70	2.746	2.738	2.730	4.70	4.747	4.739	4.731	6.70	6.747	6.739	6.731
0.80	0.802	0.794	0.786	2.80	2.802	2.794	2.786	4.80	4.802	4.794	4.786	6.80	6.802	6.794	6.786
0.85	0.857	0.849	0.841	2.85	2.858	2.850	2.842	4.85	4.858	4.850	4.842	6.85	6.858	6.850	6.842
0.90	0.913	0.905	0.897	2.90	2.913	2.905	2.897	4.90	4.913	4.905	4.897	6.90	6.913	6.905	6.897
0.95	0.969	0.961	0.953	2.95	2.969	2.961	2.953	4.95	4.969	4.961	4.953	6.95	6.969	6.961	6.953
1.00	1.024	1.016	1.008	3.00	3.024	3.016	3.008	5.00	5.024	5.016	5.008	7.00	7.025	7.017	7.009
1.05	1.080	1.072	1.064	3.05	3.080	3.072	3.064	5.05	5.080	5.072	5.064	7.05	7.080	7.072	7.064
1.10	1.135	1.127	1.119	3.10	3.135	3.127	3.119	5.10	5.136	5.128	5.120	7.10	7.136	7.128	7.120
1.15	1.191	1.183	1.175	3.15	3.191	3.183	3.175	5.15	5.191	5.183	5.175	7.15	7.191	7.183	7.175
1.20	1.246	1.238	1.230	3.20	3.246	3.238	3.230	5.20	5.247	5.239	5.231	7.20	7.247	7.239	7.231
1.30	1.302	1.294	1.286	3.30	3.302	3.294	3.286	5.30	5.302	5.294	5.286	7.30	7.302	7.294	7.286
1.35	1.357	1.349	1.341	3.35	3.358	3.350	3.342	5.35	5.358	5.350	5.342	7.35	7.358	7.350	7.342
1.40	1.413	1.405	1.397	3.40	3.413	3.405	3.397	5.40	5.413	5.405	5.397	7.40	7.413	7.405	7.397
1.45	1.469	1.461	1.453	3.45	3.469	3.461	3.453	5.45	5.469	5.461	5.453	7.45	7.469	7.461	7.453
1.50	1.524	1.516	1.508	3.50	3.524	3.516	3.508	5.50	5.524	5.516	5.508	7.50	7.525	7.517	7.509
1.55	1.580	1.572	1.564	3.55	3.580	3.572	3.564	5.55	5.580	5.572	5.564	7.55	7.580	7.572	7.564
1.60	1.635	1.627	1.619	3.60	3.635	3.627	3.619	5.60	5.636	5.628	5.620	7.60	7.636	7.628	7.620
1.65	1.691	1.683	1.675	3.65	3.691	3.683	3.675	5.65	5.691	5.683	5.675	7.65	7.691	7.683	7.675
1.70	1.746	1.738	1.73	3.70	3.747	3.739	3.731	5.70	5.747	5.739	5.731	7.70	7.747	7.739	7.731
1.80	1.802	1.794	1.786	3.80	3.802	3.794	3.786	5.80	5.802	5.794	5.786	7.80	7.802	7.794	7.786
1.85	1.857	1.849	1.841	3.85	3.858	3.850	3.842	5.85	5.858	5.850	5.842	7.85	7.858	7.850	7.842
1.90	1.913	1.905	1.897	3.90	3.913	3.905	3.897	5.90	5.913	5.905	5.897	7.90	7.914	7.906	7.898
1.95	1.969	1.961	1.953	3.95	3.969	3.961	3.953	5.95	5.969	5.961	5.953	7.95	7.969	7.961	7.953
2.00	2.024	2.016	2.008	4.00	4.024	4.016	4.008	6.00	6.024	6.016	6.008				
2.05	2.080	2.072	2.064	4.05	4.080	4.072	4.064	6.05	6.080	6.072	6.064				
2.10	2.135	2.127	2.119	4.10	4.135	4.127	4.119	6.10	6.136	6.128	6.120				
2.15	2.191	2.183	2.175	4.15	4.191	4.183	4.175	6.15	6.191	6.183	6.175				

Note: all values are rounded to the nearest 2.5mm


Dual injection Molded End Cap (DME)




Dual injection Molded End Power Feed (DME)



Dual injection Molded Bottom Power Feed (DMB)



Dual injection Molded Side Power Feed (DMSA - DMSB)



MO Vertical Bend | Orderable Length Chart

Use Actual Length for Order Code Entry.

Tolerance for Actual Lengths less than 1.8m is +/- 5mm, Actual Lengths between 1.8m and 4.8m is +/- 7.6mm, and Actual Lengths greater than 4.8m is +/- 15mm

A - End Connector at both ends of Kurba (12mm + 12mm added to overall length)


B - End Connector at one end of Kurba and No Connector or Back Connector or Side Connector at other end of Kurba (12mm + 4mm added to overall length)

C - Any combination of No Connector, Back Connector, or Side Connector on each end of Kurba (4mm + 4mm added to overall length)


Nominal Length (m)	Actual Length (m)			Nominal Length (m)	Actual Length (m)			Nominal Length (m)	Actual Length (m)			Nominal Length (m)	Actual Length (m)		
	A	B	C		A	B	C		A	B	C		A	B	C
0.20	0.246	0.238	0.230	2.20	2.246	2.238	2.230	4.20	4.247	4.239	4.231	6.20	6.247	6.239	6.231
0.30	0.302	0.294	0.286	2.30	2.302	2.294	2.286	4.30	4.302	4.294	4.286	6.30	6.302	6.294	6.286
0.35	0.357	0.349	0.341	2.35	2.358	2.35	2.342	4.35	4.358	4.350	4.342	6.35	6.358	6.350	6.342
0.40	0.413	0.405	0.397	2.40	2.413	2.405	2.397	4.40	4.413	4.405	4.397	6.40	6.413	6.405	6.397
0.45	0.468	0.460	0.452	2.45	2.469	2.461	2.453	4.45	4.469	4.461	4.453	6.45	6.469	6.461	6.453
0.50	0.524	0.516	0.508	2.50	2.524	2.516	2.508	4.50	4.524	4.516	4.508	6.50	6.525	6.517	6.509
0.55	0.580	0.572	0.564	2.55	2.580	2.572	2.564	4.55	4.580	4.572	4.564	6.55	6.580	6.572	6.564
0.60	0.635	0.627	0.619	2.60	2.635	2.627	2.619	4.60	4.635	4.627	4.619	6.60	6.636	6.628	6.620
0.65	0.691	0.683	0.675	2.65	2.691	2.683	2.675	4.65	4.691	4.683	4.675	6.65	6.691	6.683	6.675
0.70	0.746	0.738	0.730	2.70	2.746	2.738	2.730	4.70	4.747	4.739	4.731	6.70	6.747	6.739	6.731
0.80	0.802	0.794	0.786	2.80	2.802	2.794	2.786	4.80	4.802	4.794	4.786	6.80	6.802	6.794	6.786
0.85	0.857	0.849	0.841	2.85	2.858	2.850	2.842	4.85	4.858	4.85	4.842	6.85	6.858	6.850	6.842
0.90	0.913	0.905	0.897	2.90	2.913	2.905	2.897	4.90	4.913	4.905	4.897	6.90	6.913	6.905	6.897
0.95	0.969	0.961	0.953	2.95	2.969	2.961	2.953	4.95	4.969	4.961	4.953	6.95	6.969	6.961	6.953
1.00	1.024	1.016	1.008	3.00	3.024	3.016	3.008	5.00	5.024	5.016	5.008	7.00	7.025	7.017	7.009
1.05	1.080	1.072	1.064	3.05	3.080	3.072	3.064	5.05	5.080	5.072	5.064	7.05	7.080	7.072	7.064
1.10	1.135	1.127	1.119	3.10	3.135	3.127	3.119	5.10	5.136	5.128	5.120	7.10	7.136	7.128	7.120
1.15	1.191	1.183	1.175	3.15	3.191	3.183	3.175	5.15	5.191	5.183	5.175	7.15	7.191	7.183	7.175
1.20	1.246	1.238	1.230	3.20	3.246	3.238	3.230	5.20	5.247	5.239	5.231	7.20	7.247	7.239	7.231
1.30	1.302	1.294	1.286	3.30	3.302	3.294	3.286	5.30	5.302	5.294	5.286	7.30	7.302	7.294	7.286
1.35	1.357	1.349	1.341	3.35	3.358	3.350	3.342	5.35	5.358	5.350	5.342	7.35	7.358	7.350	7.342
1.40	1.413	1.405	1.397	3.40	3.413	3.405	3.397	5.40	5.413	5.405	5.397	7.40	7.413	7.405	7.397
1.45	1.469	1.461	1.453	3.45	3.469	3.461	3.453	5.45	5.469	5.461	5.453	7.45	7.469	7.461	7.453
1.50	1.524	1.516	1.508	3.50	3.524	3.516	3.508	5.50	5.524	5.516	5.508	7.50	7.525	7.517	7.509
1.55	1.580	1.572	1.564	3.55	3.580	3.572	3.564	5.55	5.580	5.572	5.564	7.55	7.580	7.572	7.564
1.60	1.635	1.627	1.619	3.60	3.635	3.627	3.619	5.60	5.636	5.628	5.620	7.60	7.636	7.628	7.620
1.65	1.691	1.683	1.675	3.65	3.691	3.683	3.675	5.65	5.691	5.683	5.675	7.65	7.691	7.683	7.675
1.70	1.746	1.738	1.730	3.70	3.747	3.739	3.731	5.70	5.747	5.739	5.731	7.70	7.747	7.739	7.731
1.80	1.802	1.794	1.786	3.80	3.802	3.794	3.786	5.80	5.802	5.794	5.786	7.80	7.802	7.794	7.786
1.85	1.857	1.849	1.841	3.85	3.858	3.850	3.842	5.85	5.858	5.850	5.842	7.85	7.858	7.850	7.842
1.90	1.913	1.905	1.897	3.90	3.913	3.905	3.897	5.90	5.913	5.905	5.897	7.90	7.914	7.906	7.898
1.95	1.969	1.961	1.953	3.95	3.969	3.961	3.953	5.95	5.969	5.961	5.953	7.95	7.969	7.961	7.953
2.00	2.024	2.016	2.008	4.00	4.024	4.016	4.008	6.00	6.024	6.016	6.008				
2.05	2.080	2.072	2.064	4.05	4.080	4.072	4.064	6.05	6.080	6.072	6.064	Note: all values are rounded to the nearest 2.5mm			
2.10	2.135	2.127	2.119	4.10	4.135	4.127	4.119	6.10	6.136	6.128	6.120				
2.15	2.191	2.183	2.175	4.15	4.191	4.183	4.175	6.15	6.191	6.183	6.175				

Note: all values are rounded to the nearest 2.5mm


Dual injection Molded End Cap (DME)




Dual injection Molded End Power Feed (DME)



Dual injection Molded Bottom Power Feed (DMB)



Dual injection Molded Side Power Feed (DMSA - DMSB)



HO Horizontal Bend | Orderable Length Chart

Use Actual Length for Order Code Entry.

Tolerance for Actual Lengths less than 1.8m is +/- 5mm, Actual Lengths between 1.8m and 4.8m is +/- 7.6mm, and Actual Lengths greater than 4.8m is +/- 15mm


A - End Connector at both ends of Kurba (12mm + 12mm added to overall length)

B - End Connector at one end of Kurba and No Connector or Back Connector or Side Connector at other end of Kurba (12mm + 4mm added to overall length)


C - Any combination of No Connector, Back Connector, or Side Connector on each end of Kurba (4mm + 4mm added to overall length)

Actual Length (m)				Actual Length (m)				Actual Length (m)				Actual Length (m)			
Nominal Length (m)	A	B	C	Nominal Length (m)	A	B	C	Nominal Length (m)	A	B	C	Nominal Length (m)	A	B	C
0.20	0.246	0.238	0.230	2.20	2.246	2.238	2.230	4.20	4.247	4.239	4.231	6.20	6.247	6.239	6.231
0.30	0.302	0.294	0.286	2.30	2.302	2.294	2.286	4.30	4.302	4.294	4.286	6.30	6.302	6.294	6.286
0.35	0.357	0.349	0.341	2.35	2.358	2.350	2.342	4.35	4.358	4.350	4.342	6.35	6.358	6.350	6.342
0.40	0.413	0.405	0.397	2.40	2.413	2.405	2.397	4.40	4.413	4.405	4.397	Note: all values are rounded to the nearest 2.5mm			
0.45	0.468	0.460	0.452	2.45	2.469	2.461	2.453	4.45	4.469	4.461	4.453				
0.50	0.524	0.516	0.508	2.50	2.524	2.516	2.508	4.50	4.524	4.516	4.508				
0.55	0.580	0.572	0.564	2.55	2.580	2.572	2.564	4.55	4.580	4.572	4.564				
0.60	0.635	0.627	0.619	2.60	2.635	2.627	2.619	4.60	4.635	4.627	4.619				
0.65	0.691	0.683	0.675	2.65	2.691	2.683	2.675	4.65	4.691	4.683	4.675				
0.70	0.746	0.738	0.730	2.70	2.746	2.738	2.730	4.70	4.747	4.739	4.731				
0.80	0.802	0.794	0.786	2.80	2.802	2.794	2.786	4.80	4.802	4.794	4.786				
0.85	0.857	0.849	0.841	2.85	2.858	2.850	2.842	4.85	4.858	4.850	4.842				
0.90	0.913	0.905	0.897	2.90	2.913	2.905	2.897	4.90	4.913	4.905	4.897				
0.95	0.969	0.961	0.953	2.95	2.969	2.961	2.953	4.95	4.969	4.961	4.953				
1.00	1.024	1.016	1.008	3.00	3.024	3.016	3.008	5.00	5.024	5.016	5.008				
1.05	1.080	1.072	1.064	3.05	3.080	3.072	3.064	5.05	5.080	5.072	5.064				
1.10	1.135	1.127	1.119	3.10	3.135	3.127	3.119	5.10	5.136	5.128	5.120				
1.15	1.191	1.183	1.175	3.15	3.191	3.183	3.175	5.15	5.191	5.183	5.175				
1.20	1.246	1.238	1.230	3.20	3.246	3.238	3.230	5.20	5.247	5.239	5.231				
1.30	1.302	1.294	1.286	3.30	3.302	3.294	3.286	5.30	5.302	5.294	5.286				
1.35	1.357	1.349	1.341	3.35	3.358	3.350	3.342	5.35	5.358	5.350	5.342				
1.40	1.413	1.405	1.397	3.40	3.413	3.405	3.397	5.40	5.413	5.405	5.397				
1.45	1.469	1.461	1.453	3.45	3.469	3.461	3.453	5.45	5.469	5.461	5.453				
1.50	1.524	1.516	1.508	3.50	3.524	3.516	3.508	5.50	5.524	5.516	5.508				
1.55	1.580	1.572	1.564	3.55	3.580	3.572	3.564	5.55	5.580	5.572	5.564				
1.60	1.635	1.627	1.619	3.60	3.635	3.627	3.619	5.60	5.636	5.628	5.620				
1.65	1.691	1.683	1.675	3.65	3.691	3.683	3.675	5.65	5.691	5.683	5.675				
1.70	1.746	1.738	1.730	3.70	3.747	3.739	3.731	5.70	5.747	5.739	5.731				
1.80	1.802	1.794	1.786	3.80	3.802	3.794	3.786	5.80	5.802	5.794	5.786				
1.85	1.857	1.849	1.841	3.85	3.858	3.850	3.842	5.85	5.858	5.850	5.842				
1.90	1.913	1.905	1.897	3.90	3.913	3.905	3.897	5.90	5.913	5.905	5.897				
1.95	1.969	1.961	1.953	3.95	3.969	3.961	3.953	5.95	5.969	5.961	5.953				
2.00	2.024	2.016	2.008	4.00	4.024	4.016	4.008	6.00	6.024	6.016	6.008				
2.05	2.080	2.072	2.064	4.05	4.080	4.072	4.064	6.05	6.080	6.072	6.064				
2.10	2.135	2.127	2.119	4.10	4.135	4.127	4.119	6.10	6.136	6.128	6.120				
2.15	2.191	2.183	2.175	4.15	4.191	4.183	4.175	6.15	6.191	6.183	6.175				


Dual injection Molded End Cap (DME)



Dual injection Molded End Power Feed (DME)



Dual injection Molded Bottom Power Feed (DMB)



Dual injection Molded Side Power Feed (DMSA - DMSB)

