

LETO 11.5

SUSPENDED WET LED CYLINDER




Features

- Faceted and Smooth metal reflectors provide beam spreads between 10° to 80°.
- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 2000 lumens.
- Five year warranty.

Finish Options

- White
- Black
- Silver
- Mocha
- Charcoal
- Cerulean
- Firebrick

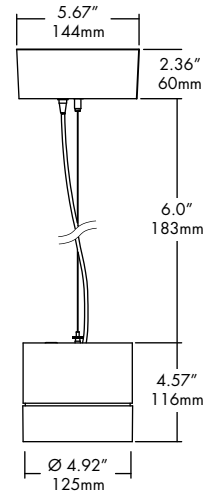

Technical Information

| OUTPUT OPTIONS | 700 lm | 1000 lm | 1500lm |
|--|----------|----------|----------|
| Fixture wattage | 6.1 W | 9.1 W | 14.0 W |
| Delivered Lumen at 3500K | 647 lm | 965 lm | 1474 lm |
| Efficacy | 106 lm/W | 106 lm/W | 105 lm/W |
| Center Beam Candlepower (10° Faceted Reflector) | 5399 cd | 8052 cd | 12300 cd |

| CCT | Multiplier | CRI | TM-30 | | |
|-------|------------|-----|----------------|----------------|----------------|
| | | | R _f | R _g | R ₉ |
| 2500K | 0.81 | 92 | 90 | 104 | 77 |
| 2700K | 0.92 | 92 | 91 | 102 | 61 |
| 3000K | 0.97 | 95 | 92 | 102 | 61 |
| 3500K | 1.00 | 95 | 93 | 101 | 72 |
| 4000K | 1.07 | 95 | 92 | 103 | 68 |
| 6500K | 1.05 | 96 | 91 | 100 | 89 |

Integral Driver Example: Fixture LET115W-S-07-25K-F10-CL-WH-WH-RD-WH-SS2-WH-PHSD-NA
 Remote Driver Example: Fixture LET115W-S-07-25K-F10-CL-WH-WH-RD-WH-SS2-WH-010L-NA
 HRM-LET115W-S-07-25K-010L-NA

Ordering Code

Fixture

| MODEL | TYPE | OUTPUT | CCT | OPTIC | ACCESSORY | BODY FINISH | BAFFLE FINISH |
|-------------------------|---------------|--|--|---|--|--|--|
| LET115W - Leto 11.5 Wet | S - Suspended | 07 - 700 lumens (6.1W) ¹ 10 - 1000 lumens (9.1W) 15 - 1500 lumens (14.0W) | 25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 65K - 6500K | F10 - 10 Degree, Faceted F18 - 18 Degree, Faceted F30 - 30 Degree, Faceted F45 - 45 Degree, Faceted F60 - 60 Degree, Faceted S30 - 30 Degree, Smooth S45 - 45 Degree, Smooth S80 - 80 Degree, Smooth | CL - Clear Lens DL - Diffusing Lens | Standard WH - White BK - Black SL - Silver Premium² MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick | Standard WH - White BK - Black SL - Silver Premium² MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick |

| CANOPY/ HOUSING | CANOPY FINISH | SUSPENSION TYPE | SUSPENSION FINISH | DRIVER | DRIVER OPTIONS |
|---------------------------|--|--|--|---|--|
| RD - Round SQ - Square | Standard WH - White BK - Black SL - Silver Premium² MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick | SS2 - Solid Stem, 2' SS3 - Solid Stem, 3' SS6 - Solid Stem, 6' | Standard WH - White BK - Black SL - Silver Premium² MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick | PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only 010S - 0-10V, 1% Dimming, 120/277V 0103 - 0-10V, 1% Dimming, 347V Only 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V ⁴ 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V ⁴ DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V ³ LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V ³ | NA - None EMG - Emergency Driver ^{3,5} CSMB - Casambi ⁶ AWN - Athena ⁶ |

1 - 700 lumens is not available with LUTE driver.
 2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
 3 - All drivers remote mounted when using DALI8 driver, DMX driver, or EMG driver options.
 4 - Requires square canopy SQ for integral driver, otherwise remote mounted.
 5 - Emergency option comes wired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.
 6 - AWNR/CSMB only available with 010S driver and RD/SQ canopy.

CONTACT FACTORY FOR MORE OPTIONS.

Canopy

RD Round Canopy



| Integral Drivers | Remote Drivers |
|------------------|----------------|
| 010S | 010L |
| 0103 | 010G |
| PHSD | DALI |
| | DALI8 |
| | LUTE |
| | DMX |

SQ Square Canopy



| Integral Drivers | Remote Drivers |
|------------------|----------------|
| 010S | DMX |
| 0103 | DALI8 |
| PHSD | |
| 010L | |
| 010G | |
| DALI | |
| DALI8 | |
| LUTE | |

Please see next page for Remote Driver Housing details.

Suspension

SSX (2', 3', 6' max) Solid Stem



Lens & Accessory Options

OPTC-ACC-CL-94MM

Clear Lens
Also available with complete fixture, use ordering code.
-CL



Light Loss Factor: 100%*

OPTC-ACC-DL-94MM

Diffusing Lens
Also available with complete fixture, use ordering code.
-DL



Light Loss Factor: 87%*

*Light Loss Factor calculated with 60° faceted reflector.

Optics

RFLC-FXX-94MM

Faceted Reflector
Also available with complete fixture, use ordering code.
-F10/-F18/-F30/-F45/-F60



RFLC-SXX-94MM

Smooth Reflector
Also available with complete fixture, use ordering code.
-S30/-S45/-S60



| FXX | Optic |
|-----|-------------|
| F10 | 10° Faceted |
| F18 | 18° Faceted |
| F30 | 30° Faceted |
| F45 | 45° Faceted |
| F60 | 60° Faceted |
| S30 | 30° Smooth |
| S45 | 45° Smooth |
| S60 | 60° Smooth |


Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

| REMOTE DRIVER | MODEL | OUTPUT | CCT | DRIVER | DRIVER OPTIONS |
|---------------------|-----------------------------------|-----------------|-----------------|-----------------|-----------------|
| HRM-Housing, Remote | LET115W-S-Leto 11.5 Wet Suspended | Same as Fixture | Same as Fixture | Same as Fixture | Same as Fixture |


| Maximum mounting distance to luminaire using 18 AWG wire | | | | | | |
|--|------|------|------|------------|------|------|
| 010S | PHSD | 010L | 010G | DALI DALI8 | DMX | LUTE |
| 16' | 16' | 72' | 72' | 72' | 149' | 15' |

HRM Single with Externally Mounted Driver

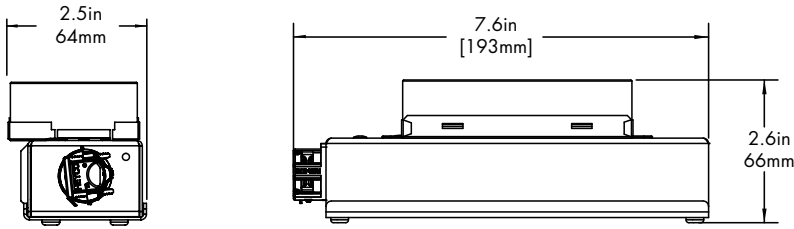


| Canopy | + | Driver |
|-----------|---|----------------------|
| RTL or RD | + | 010L or 010G |
| RTL or RD | + | 010S |
| RTL | + | 010L or 010G or 010S |
| RTL or RD | + | DALI or LUTE |

HRM Single

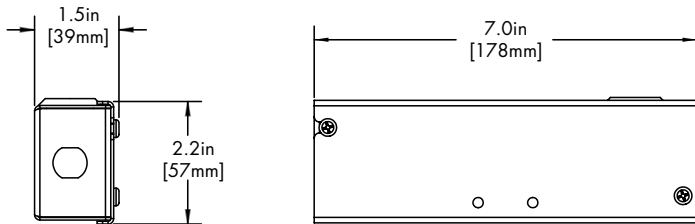

| Canopy | + | Driver |
|--------|---|--------|
| RTL | + | PHSD |


HRM Double

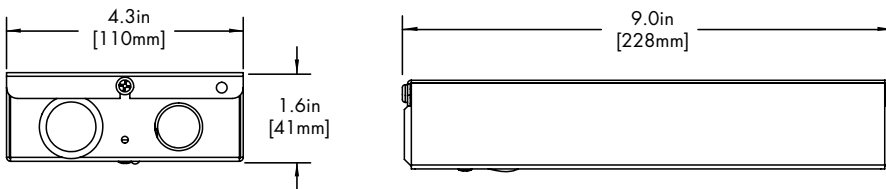

| Driver |
|--------|
| DALI8 |
| DMX |

EMG Emergency Driver

120 minute EMG operation time.

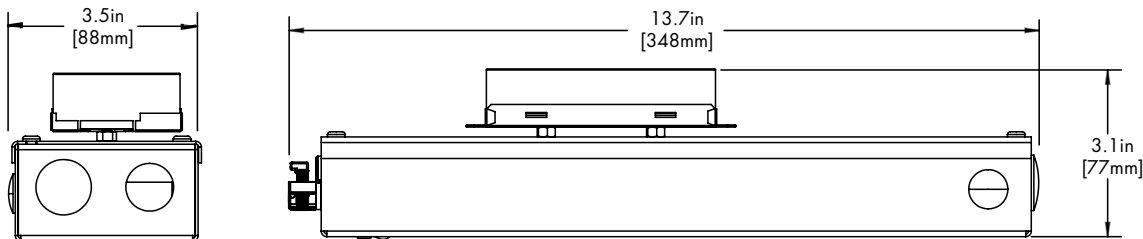

| Driver |
|--------|
| EMG |

Standard Finishes

BK
Black



WH
White



SL
Silver



Premium Finishes


MA
Mocha




CC
Charcoal



CR
Cerulean





FB
Firebrick



Two Tone Finishes


Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.



TM-30

2500K


COLOR VECTOR GRAPHIC

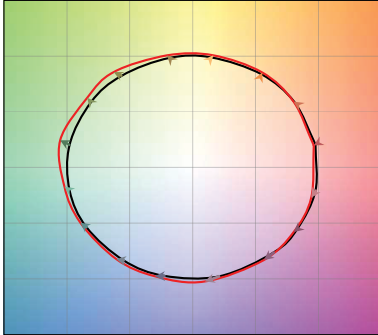

— Reference Source — Test Source

2700K


COLOR VECTOR GRAPHIC

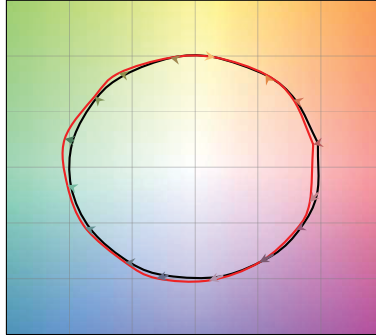

— Reference Source — Test Source

3000K


COLOR VECTOR GRAPHIC

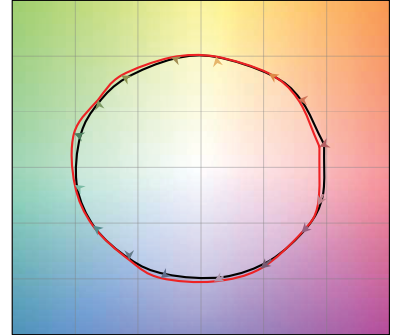

— Reference Source — Test Source

3500K


COLOR VECTOR GRAPHIC

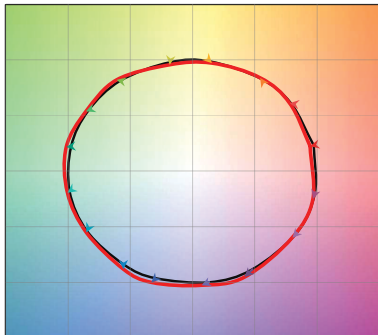

— Reference Source — Test Source

4000K


COLOR VECTOR GRAPHIC

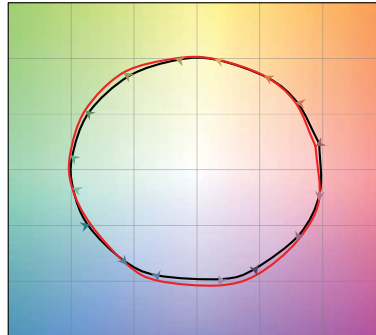

— Reference Source — Test Source

6500K



COLOR VECTOR GRAPHIC

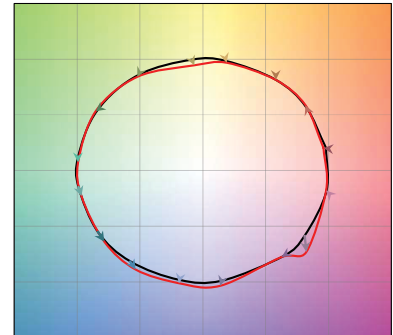



— Reference Source — Test Source

Photometry



10° Faceted Reflector

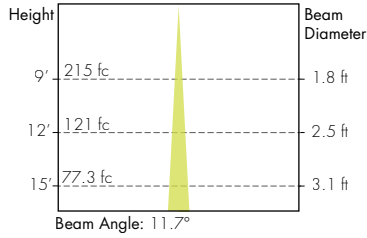



30° Smooth Reflector

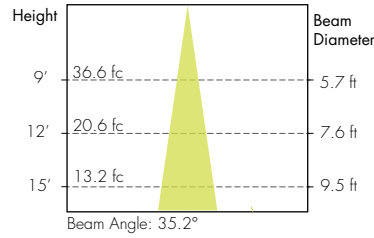



18° Faceted Reflector

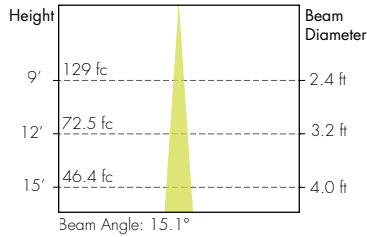



45° Smooth Reflector

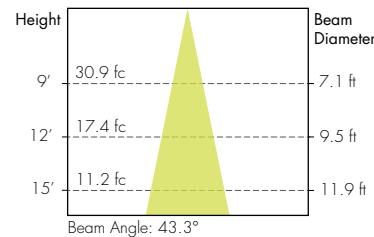



30° Faceted Reflector

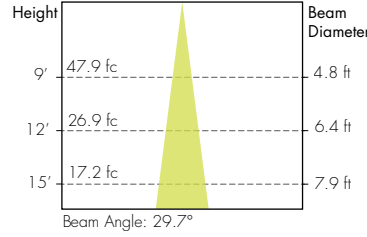

80° Smooth Reflector

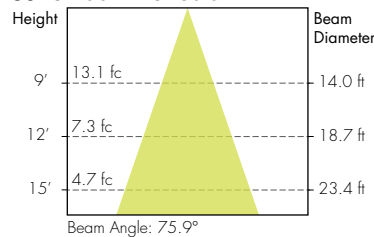

45° Faceted Reflector

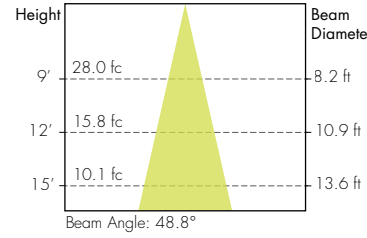

60° Faceted Reflector

