


LETO 11

SUSPENDED ASYMMETRIC LED CYLINDER
TUNABLE WHITE & WARM DIM

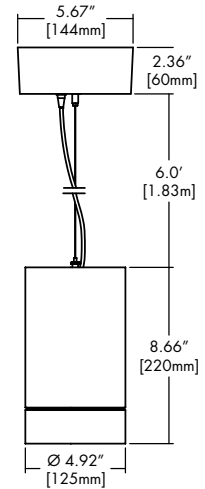

Features

- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 1300 lumens.
- Five year warranty.

Finish Options

- White
- Mocha
- Black
- Charcoal
- Silver
- Cerulean
- Firebrick



Technical Information

TYPE	WD1830			TW2765
OUTPUT OPTIONS	700 lm	1000lm	1300lm	1300lm
Fixture wattage	8.51 W	11.16 W	16.06 W	16.41 W
Delivered Lumen at full on	807 lm	1129 lm	1597 lm	1141 lm
Efficacy	95 lm/W	101 lm/W	99 lm/W	70 lm/W
Center Beam Candlepower (18° Faceted Reflector)	5325 cd	7692 cd	11834 cd	7571 cd

CCT	CRI	TM-30		
		R _f	R _g	R ₉
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

Integral Driver Example: Fixture LET11-S-07-WD1830-ASM-DL-WH-WH-RD-WH-2AF-NA-PHSD-NA
Remote Driver Example: Fixture LET11-S-07-WD1830-ASM-DL-WH-WH-RD-WH-2AF-NA-010L-NA
HRM-LET11-S-07-WD1830-010L-NA

Ordering Code

Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
-------	------	--------	-----	-------	-----------	-------------	---------------

LET11 - Leto 11	S - Suspended	07 - 700 lumens ¹ 10 - 1000 lumens 13 - 1300 lumens	WD1830 - Warm Dim, 1800K-3000K TW2765 - Tunable White, 2700K-6500K ¹¹	ASM - Asymmetric	DL - Diffusing Lens	Standard WH - White BK - Black SL - Silver ⁶ Premium ² MA - Mocha ⁶ CC - Charcoal ⁶ CR - Cerulean ⁶ FB - Firebrick ⁶	Standard WH - White BK - Black SL - Silver ⁶ Premium ² MA - Mocha ⁶ CC - Charcoal ⁶ CR - Cerulean ⁶ FB - Firebrick ⁶
-----------------	---------------	--	---	------------------	---------------------	--	--

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
-----------------	---------------	-----------------	-------------------	--------	----------------

RD - Round RTL - Round Trimless ^{3,5} SQ - Square	Standard WH - White BK - Black SL - Silver ⁶ Premium ² MA - Mocha ⁶ CC - Charcoal ⁶ CR - Cerulean ⁶ FB - Firebrick ⁶	2AF - 2AC + Feed Cable SS2 - Solid Stem, 2' SS3 - Solid Stem, 3' SS6 - Solid Stem, 6' HS2 - Hang Straight, 2' ⁵ HS3 - Hang Straight, 3' ⁵ HS6 - Hang Straight, 6' ⁵ POA - POA	Standard NA - None ⁷ CL - Clear ¹² WH - White BK - Black SL - Silver ⁶ Premium ² MA - Mocha ⁶ CC - Charcoal ⁶ CR - Cerulean ⁶ FB - Firebrick ⁶	PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only 010S - 0-10V, 1% Dimming, 120/277V 0103 - 0-10V, 1% Dimming, 347V Only 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V ⁴ 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V ⁴ DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V ⁶ DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V ³ LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V ⁶ DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V ³	NA - None EMG - Emergency Driver ^{3,8} CSMB - Casambi ^{9,10} AWNR - Athena ^{9,10}
--	--	---	--	---	---

1 - 700 lumens is not available with LUTE driver.
2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
3 - All drivers remote mounted when using RTL canopy, DALI8 driver, DMX driver, or EMG driver options.
4 - Requires square canopy SQ for integral driver, otherwise remote mounted.
5 - RTL canopy is not available with HS2/HS3/HS6 suspension.
6 - These finishes are only available with SS Solid Stem or HS Hang Straight.
7 - Must select NA None when POA option is selected.
8 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.
9 - AVNR/CSMB only available with 010S driver and RD/SQ canopy.
10 - AWNR/CSMB available upon request with RTL canopy.
11 - TW2765 only available with 13 lumens and 010L/010G/DALI8/DMX. Always remote mounted. Cannot use with EMG.
12 - Clear Finish only available with 1AF/2AF suspension type.

CONTACT FACTORY FOR MORE OPTIONS.


LETO 11

SUSPENDED ASYMMETRIC LED CYLINDER
TUNABLE WHITE & WARM DIM

Canopy


RD

Round Canopy

	Integral Drivers	Remote Drivers
 <p>2.36" 60mm</p> <p>Ø5.17" 131mm</p>	010S	010L
	0103	010G
	PHSD	DAI
		DAI8
		LUTE
		DMX


RTL

Round Trimless Canopy

	Integral Drivers	Remote Drivers	
 <p>Ø5.17" 131mm</p>	N/A	010S	
		0103	
		PHSD	
		010L	
		010G	
		DAI	
		DAI8	
		LUTE	
			DMX

SQ

Square Canopy

	Integral Drivers	Remote Drivers
 <p>2.28" 58mm</p> <p>5.67" 144mm</p>	010S	DMX
	0103	DAI8
	PHSD	
	010L	
	010G	
	DAI	
	DAI8	
	LUTE	

Please see next page for Remote Driver Housing details.

Suspension

2AF

2 Aircraft + Feed Cable

SSX (2', 3', 6' max)

Solid Stem

HSX (2', 3', 6' max)

Hang Straight Solid Stem

POA

2 Powered Aircraft



Maximum Slope: 15°

Lens

DL

Diffusing Lens



Light Loss Factor: 87%*

*Light Loss Factor calculated with 60° faceted reflector.

LETO 11

SUSPENDED ASYMMETRIC LED CYLINDER
TUNABLE WHITE & WARM DIM


Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	CCT	OUTPUT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11-S-Leto 11 Suspended	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

HRM Single with Externally Mounted Driver

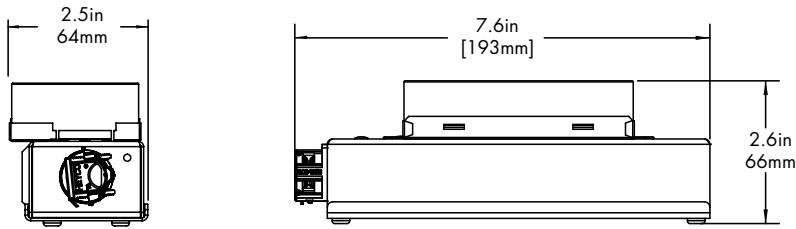


Canopy	+	Driver
RTL or RD	+	010L or 010G
RTL or RD	+	010S
RTL	+	010L or 010G or 010S
RTL or RD	+	DALI or LUTE

HRM Single

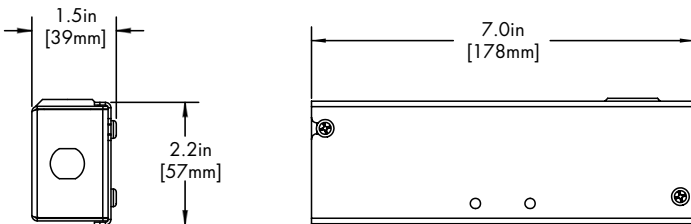

Canopy	+	Driver
RTL	+	PHSD


HRM Double

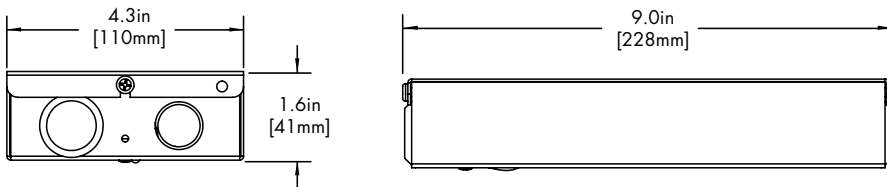

Driver
DALI8
DMX

EMG Emergency Driver

120 minute EMG operation time.

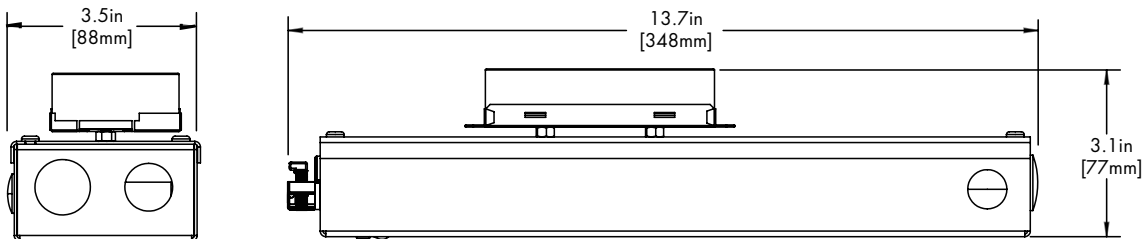

Driver
EMG

LETO 11

SUSPENDED ASYMMETRIC LED CYLINDER
TUNABLE WHITE & WARM DIM

Standard Colors

BK
Black



WH
White




SL
Silver



Premium Colors


MA
Mocha




CC
Charcoal



CR
Cerulean





FB
Firebrick



Two Tone Finishes

Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.




LETO 11

SUSPENDED ASYMMETRIC LED CYLINDER
TUNABLE WHITE & WARM DIM

TM-30

Warm Dim 1800K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Warm Dim 3000K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 6500K

COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Photometry

18° Faceted Reflector

