






**Features**

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 32' depending on output
- Available with plenum rated wire leads or with integral junction box for splice connection.
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7 W/ft or less
- Class 2 listed for damp locations
- Dot free even illumination
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors.
- Tunable White allows individual control of CCT and output, can be paired with Vintage Dim power supply for warm dim effect
- Warm Dim follows the incandescent dimming curve and is compatible with MLV, ELV, and Incandescent dimmers.
- RGB offers balanced output across the color gamut and a true white with RGBW
- Smart Pixel allows for infinite color combinations with cascading and chasing effects
- Average Life (L70): 50,000hrs
- 7 year warranty



**Technical Information**

TYPE	Warm Dim			Tunable White			RGBW		RGB		Pixel	
	WD68SO (19K-27K)	TW68SO (27K-65K)	TW68HO (27K-65K)	RGBW36SO	RGBW36HO	RGB42SO	RGB42HO	RGBWX18SO	RGBX18SO			
<b>OUTPUT OPTIONS</b>												
Lumens Output (all channels full on) (with a Frosted Lens)	195 lm/ft	237 lm/ft	285 lm/ft	119 lm/ft	197 lm/ft	118 lm/ft	173 lm/ft	144 lm/ft	95 lm/ft			
Average Power Consumption (for a 4' section)	5.4 W/ft	4.6 W/ft	5.6 W/ft	4 W/ft	7.6 W/ft	4.5 W/ft	8.3 W/ft	5.7 W/ft	4.5 W/ft			
Efficacy	36 lm/W	52 lm/W	51 lm/W	30 lm/W	26 lm/W	26 lm/W	21 lm/W	25 lm/W	21 lm/W			
Max Run Length (in series)	20 ft	32 ft	32 ft	26 ft	13 ft	28 ft	13 ft	20 ft	30 ft			
Ambient Operating Temperature Range*	-5°F - 125°F (-20°C - 50°C)			-5°F - 125°F (-20°C - 50°C)		-5°F - 125°F (-20°C - 50°C)		-5°F - 125°F (-20°C - 50°C)				
Control/Dimming Protocol	MLV, ELV, Inc.			0-10V, DMX		DMX		SPI Protocol UCS 2904	SPI Protocol UCS 2903			

\*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Max Ambient Temperature may result in decreased life/output. Consult Technical Support for specific inquiries.

Warm Dim (WD68)					Tunable White (TW68)					RGBW (3000K)					Dominant Wavelength		
CCT	CRI	TM-30			CCT	CRI	TM-30			Tape	CRI	TM-30			Color	RGB42/RGBW36	RGBX18/RGBWX18
		R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>			
1900K	96	92	96	94	2700K	98	96	101	91	RGBW36	95	93	106	84	Red	620nm	621nm
2400K	97	96	103	98	2900K	98	96	102	94	RGBWX18	93	91	99	64	Green	525nm	519nm
2700K	96	93	106	95	3500K	97	94	105	97	TW68			Blue	467nm	465nm		
					4100K	95	91	104	79	CCT Multiplier							
					4400K	97	91	101	97	27K - 65K			1.00				
					6500K	92	88	97	64	19K - 35K			0.78				

**Ordering Code**

MODEL	LENGTH <sup>1</sup>	OUTPUT <sup>2</sup>	CCT	LENS	MOUNTING	LEFT END CAP <sup>3</sup>	RIGHT END CAP <sup>3</sup>	POWER SUPPLY TYPE
LN - Lini	12"-144" 3" increments	WD68SO - Standard	19K27K - 1900K - 2700K	F - Frosted Lens FS - Frosted Silicone Lens N - No Lens	GDS - Gypsum Drywall DHS - Surface Drywall to Hard Surface	LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box
	12"-144" 3" increments	TW68SO - Standard TW68HO - High	19K35K - 1900K - 3500K 27K65K - 2700K - 6500K			LE - Endcap Left End LN - No Endcap Left End LNJ - No Endcap Left End, with jumper	RNJ - No Endcap Right End, with jumper	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box CNPf - No Power Feed
	12"-144" 2" increments	RGBW36SO - Standard RGBW36HO - High RGB42SO - Standard RGB42HO - High	CLR - Color			LNJ - No Endcap Left End, with jumper	RE - Endcap Right End RN - No Endcap Right End RNJ - No Endcap Right End, with jumper	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box CNPf - No Power Feed
	12"-144" 4" increments	RGBWX18SO - Standard RGBX18SO - Standard	PXSPI - Smart Pixel Control					




1 - Custom lengths and increments are available, please consult Inside Sales with specific request.  
 2 - Warm Dim and Tunable White options can be used to comply with Title 24 JAB at max brightness depending on Lens selection, see multiplier charts to calculate specific efficacy.  
 3 - Cant be paired with LE - RE option

### Linii Gypsum Drywall Surface (GDS) Corner Options

**LIN-IC**  
Inner Corner

**LIN-FC**  
Flat Corner

**LIN-OC**  
Outside Corner

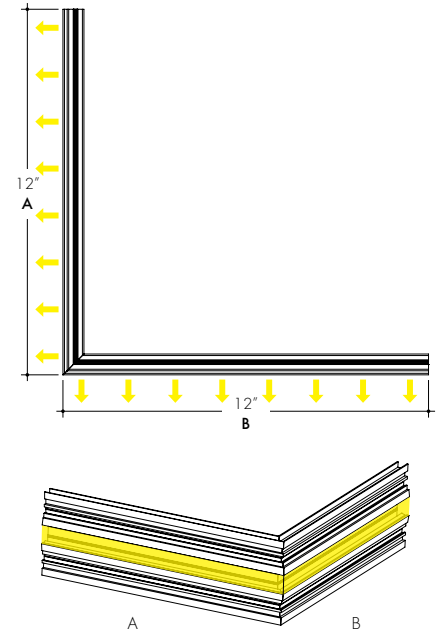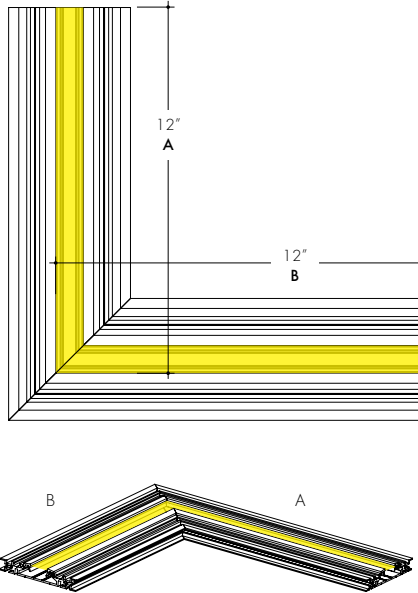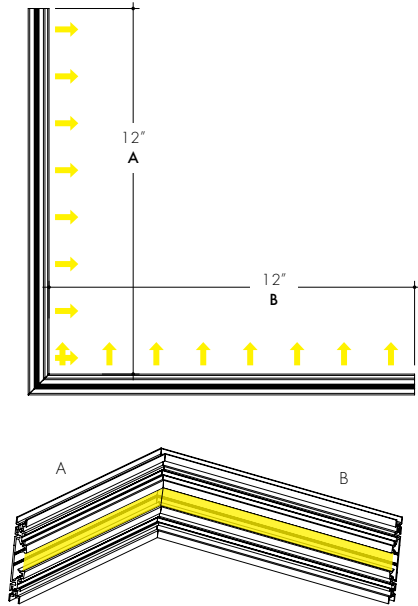

Tunable White	Actual Length		Total Wattage	
	A	B	TW68SO	TW68HO
<b>Corner Type</b>				
Flat (LIN-FC)	10 1/16	10 12/16	8.7	10.8
Outer (LIN-OC)	10 9/16	10 9/16	8.7	10.8
Inner (LIN-IC)	9 6/16	9 6/16	8.7	10.8

Warm Dimming	Actual Length		Total Wattage
	A	B	WD68SO
<b>Corner Type</b>			
Flat (LIN-FC)	10 1/16	10 12/16	10.2
Outer (LIN-OC)	10 9/16	10 9/16	10.2
Inner (LIN-IC)	9 6/16	9 6/16	10.2

RGB/RGBW/PIXEL	Total Wattage				Actual Length		Total Wattage			
	A	B	RGBW36SO	RGBW36HO	RGB42SO	RGB42HO	A	B	RGBX18SO	RGBWX18SO
<b>Corner Type</b>										
Flat (LIN-FC)	12	12 11/16	6.7	13.3	8.2	15.2	12	12 11/16	9.4	7.6
Outer (LIN-OC)	12 9/16	12 9/16	6.7	13.3	8.2	15.2	12 9/16	12 9/16	9.4	7.6
Inner (LIN-IC)	11 6/16	11 6/16	6.7	13.3	8.2	15.2	11 6/16	11 6/16	9.4	7.6


### Ordering Code

MODEL	CORNER TYPE	ANGLE <sup>1</sup>	OUTPUT <sup>2</sup>		CCT	LENS	MOUNTING	LEFT END CAP <sup>3</sup>	RIGHT END CAP <sup>3</sup>	POWER SUPPLY TYPE
LIN-Linii	IC- Inner Corner OC- Outer Corner FC- Flat Corner	90-90° Corner C- Custom Angle Corner	WD68SO- Standard TW68SO- Standard TW68HO- High	19K27K- 1900K- 2700K 19K35K- 1900K- 3500K 27K65K- 2700K- 6500K		F- Frosted Lens FS- Frosted Silicone Lens N- No Lens	GDS- Gypsum Drywall Surface	LE- Endcap Left End LN- No Endcap Left End	RE- Endcap Right End RN- No Endcap Right End	CPB- Center Power Feed, Plenum rated 72" wires CJB- Center Power Feed, Junction Box
			RGBW36SO- Standard RGBW36HO- High RGB42SO- Standard RGB42HO- High	CLR- Color				LE- Endcap Left End LN- No Endcap Left End LNJ- No Endcap Left End, with jumper	RNJ- No Endcap Right End, with jumper	CPB- Center Power Feed, Plenum rated 72" wires CJB- Center Power Feed, Junction Box CNPf- No Power Feed
			RGBWX18SO- Standard RGBX18SO- Standard	PXSPI- Smart Pixel Control				LNJ- No Endcap Left End, with jumper	RE- Endcap Right End RN- No Endcap Right End RNJ- No Endcap Right End, with jumper	CPB- Center Power Feed, Plenum rated 72" wires CJB- Center Power Feed, Junction Box CNPf- No Power Feed


1 - Custom lengths and increments are available, please consult Inside Sales with specific request.  
 2 - Warm Dim and Tunable White options can be used to comply with Title 24 JA8 at max brightness depending on Lens selection, see multiplier charts to calculate specific efficacy.  
 3 - Cant be paired with LE - RE option

**Linii Drywall to Hard Surface (DHS) Corner Options**


**LIN-FC1**  
Flat Corner (Option 1)

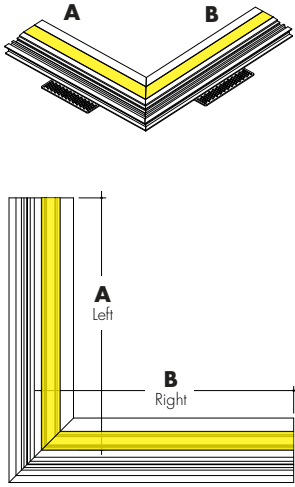


**LIN-FC2**  
Flat Corner (Option 2)

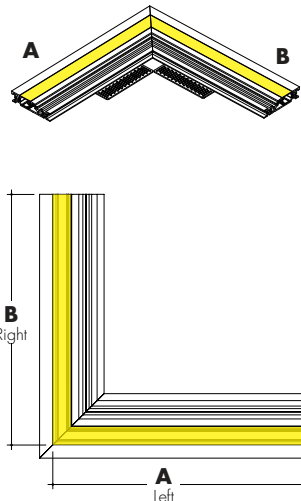

**LIN-IC**  
Inner Corner

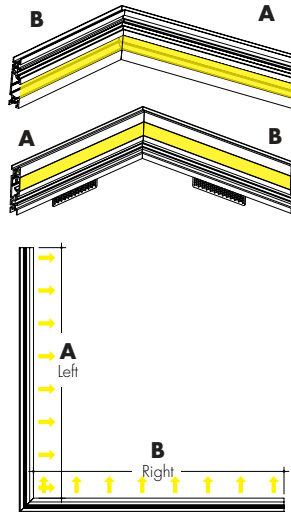

**LIN-OC**  
Outside Corner

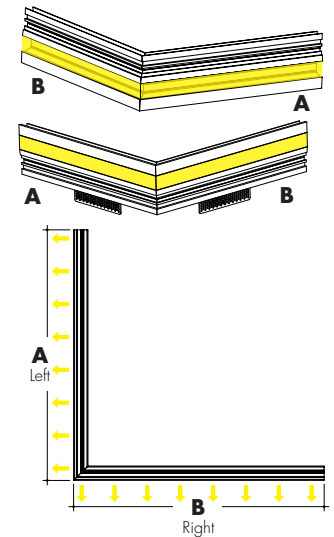

Tunable White	Actual Length		Total Wattage	
	A	B	TW68SO	TW68HO
Flat 1 (LIN-FC1)	10 1/16	10 12/16	8.7	10.8
Flat 2 (LIN-FC2)	10 1/16	10 12/16	8.7	10.8
Outer (LIN-OC)	10 9/16	10 9/16	8.7	10.8
Inner (LIN-IC)	9 6/16	9 6/16	8.7	10.8

Warm Dimming	Actual Length		Total Wattage
	A	B	WD68SO
Flat 1 (LIN-FC1)	10 1/16	10 12/16	10.2
Flat 2 (LIN-FC2)	10 1/16	10 12/16	10.2
Outer (LIN-OC)	10 9/16	10 9/16	10.2
Inner (LIN-IC)	9 6/16	9 6/16	10.2

RGB/RGBW/PIXEL	Actual Length				Total Wattage					
	A	B	RGBW36SO	RGBW36HO	RGB42SO	RGB42HO	A	B	RGBX18SO	RGBWX18SO
Flat 1 (LIN-FC1)	12	12 11/16	6.7	13.3	8.2	15.2	12	12 11/16	9.4	7.6
Flat 2 (LIN-FC2)	12	12 11/16	6.7	13.3	8.2	15.2	12	12 11/16	9.4	7.6
Outer (LIN-OC)	12 9/16	12 9/16	6.7	13.3	8.2	15.2	12 9/16	12 9/16	9.4	7.6
Inner (LIN-IC)	11 6/16	11 6/16	6.7	13.3	8.2	15.2	11 6/16	11 6/16	9.4	7.6

**Ordering Code**


MODEL	CORNER TYPE	ANGLE <sup>1</sup>	OUTPUT <sup>2</sup>	CCT	LENS	MOUNTING	LEFT END CAP <sup>5</sup>	RIGHT END CAP <sup>5</sup>	POWER SUPPLY TYPE
LIN-Linii	IC - Inner Corner OC - Outer Corner FC1 - Flat Corner (option 1) FC2 - Flat Corner (option 2)	90 - 90° Corner C - Custom Angle Corner	WD68SO - Standard TW68SO - Standard TW68HO - High	19K27K - 1900K- 2700K 19K35K - 1900K- 3500K 27K65K - 2700K- 6500K	F - Frosted Lens FS - Frosted Silicone Lens N - No Lens	DHS - Drywall to Hard Surface	LE - Endcap Left End LN - No Endcap Left End	RE - Endcap Right End RN - No Endcap Right End	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box
			RGBW36SO - Standard RGBW36HO - High RGB42SO - Standard RGB42HO - High	CLR - Color			LE - Endcap Left End LN - No Endcap Left End LNJ - No Endcap Left End, with jumper	RNJ - No Endcap Right End, with jumper	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box CNPF - No Power Feed
			RGBWX18SO - Standard RGBX18SO - Standard	PXSPI - Smart Pixel Control			LNJ - No Endcap Left End, with jumper	RE - Endcap Right End RN - No Endcap Right End RNJ - No Endcap Right End, with jumper	CPB - Center Power Feed, Plenum rated 72" wires CJB - Center Power Feed, Junction Box CNPF - No Power Feed

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.  
 2 - Warm Dim and Tunable White options can be used to comply with Title 24 JA8 at max brightness depending on Lens selection, see multiplier charts to calculate specific efficacy.  
 3 - Cant be paired with LE - RE option

**Powerfeed options for Straight Fixtures**


**LIN-LE-RE-CPB**

Wire leads, plenum rated CL3R cable on Straight Fixture

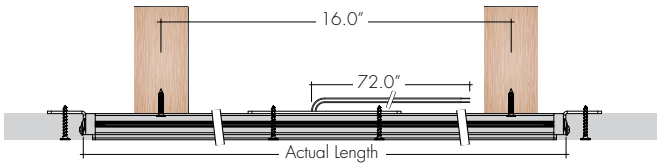


**LIN-LE-RE-CJB**

One integrated junction box centered on Straight fixture

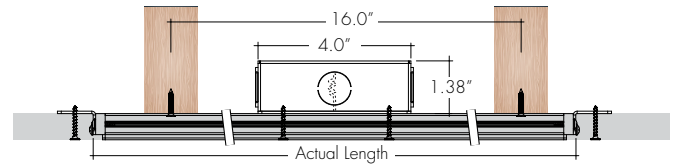

**LIN-LE-RNJ-CNPF**


No Power Feed, fixture is receiving power from adjacent fixture with jumper

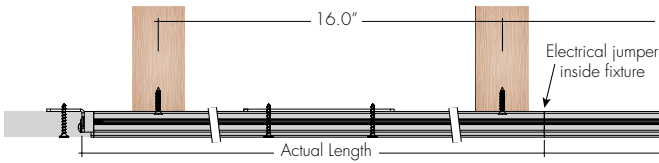

**Powerfeed options for Corner Fixtures**


**LIN-FC-90-XX-DHS-CPB**

Wire Leads centered on segment B of corner







**LIN-IC-90-XX-DHS-CPB**

Wire Leads centered on segment B of corner



**LIN-OC-90-XX-DHS-CPB**

Wire Leads centered on segment B of corner

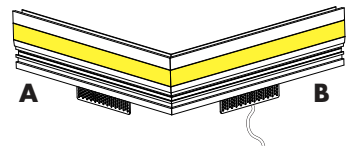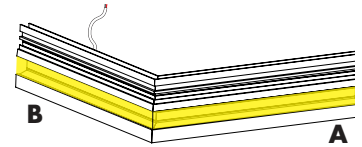

**LIN-FC-90-XX-GDS-CPB**




Wire Leads centered on segment B of corner

**LIN-IC-90-XX-GDS-CPB**

Wire Leads centered on segment B of corner

**LIN-OC-90-XX-GDS-CPB**




Wire Leads centered on segment B of corner






**Note:** Plenum wire leads are shown, but the same standard also applied to the junction box which is also centered on segment B of the corner fixture.

**Product Dimensions**

**Linii GDS - Gypsum Drywall Surface**

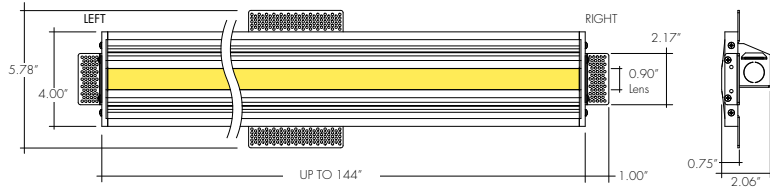


**Linii DHS - Gypsum Drywall Surface to Hard Surface**

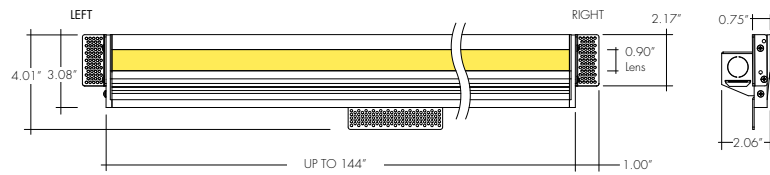

**Accessory Options**

**Continuous Lens (Field Cuttable)**




**LINC-FS** - Linii Channel Continuous Frosted Silicone Lens    **XX** - Order in 10' increments up to 160'

**Note:** Order the continuous (field cuttable) lens up to 160'. Recommended to avoid seams between multiple fixtures joining together.


**LVSP-4T-BK**

Low Voltage, 4 Terminal Splice Box, Black




### Sample Layout of Power Feed

Jumper connection inside of fixture (lens not shown)

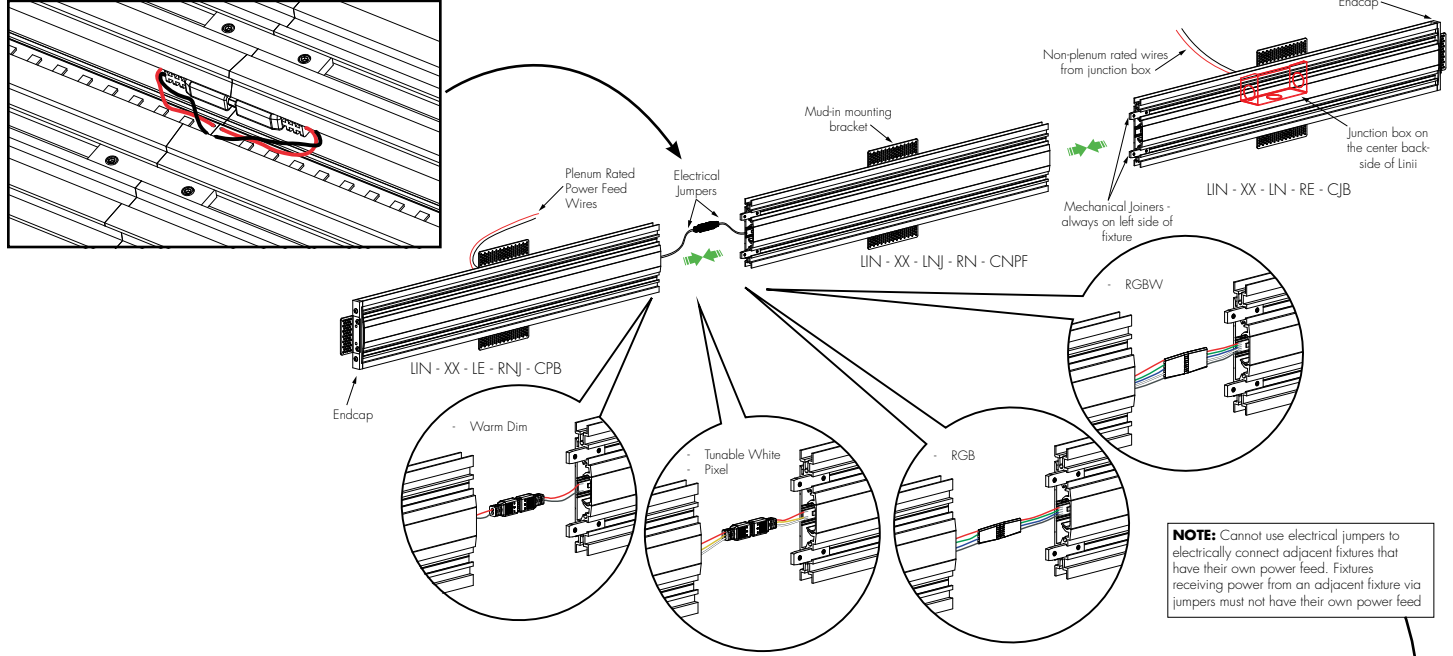

Invalid Sample Layout of Power Feed

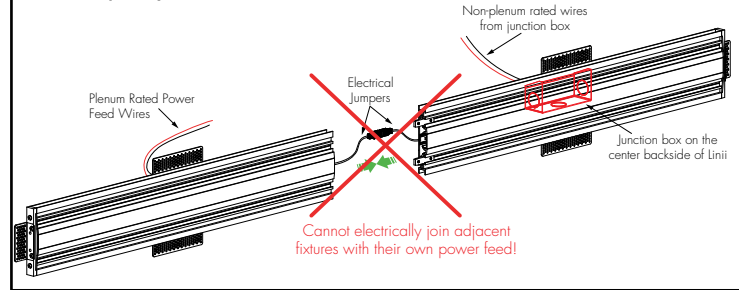


### Powerfeeds and Connectors


#### Linking and Extension Cable Options

Jumpers, Adapters, and Lead Wires are included


#### For use with Warm Dim (WD68):

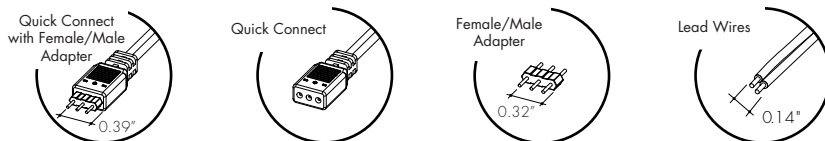


#### For use with Tunable White (TW68), RGB Pixel (RGBX18) and RGBW Pixel (RGBWX18):

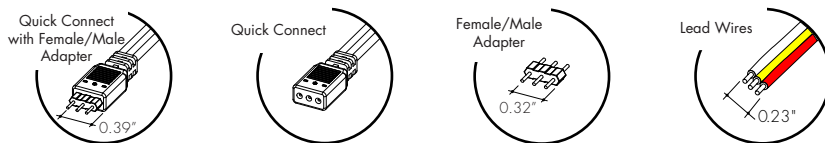

#### For use with RGB (RGB42):

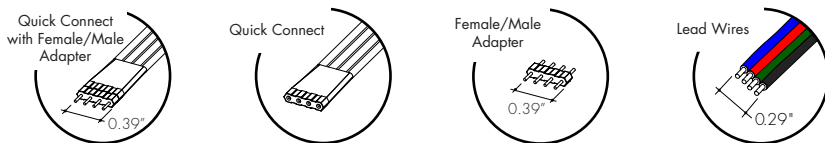


#### For use with RGBW (RGBW36):

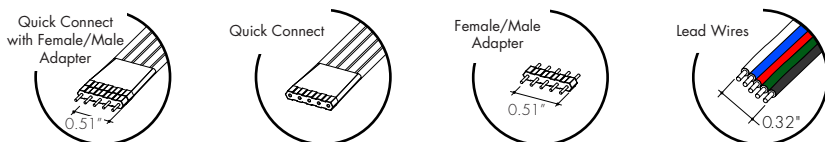


Layout Example

Corner types and straight runs are ordered individually

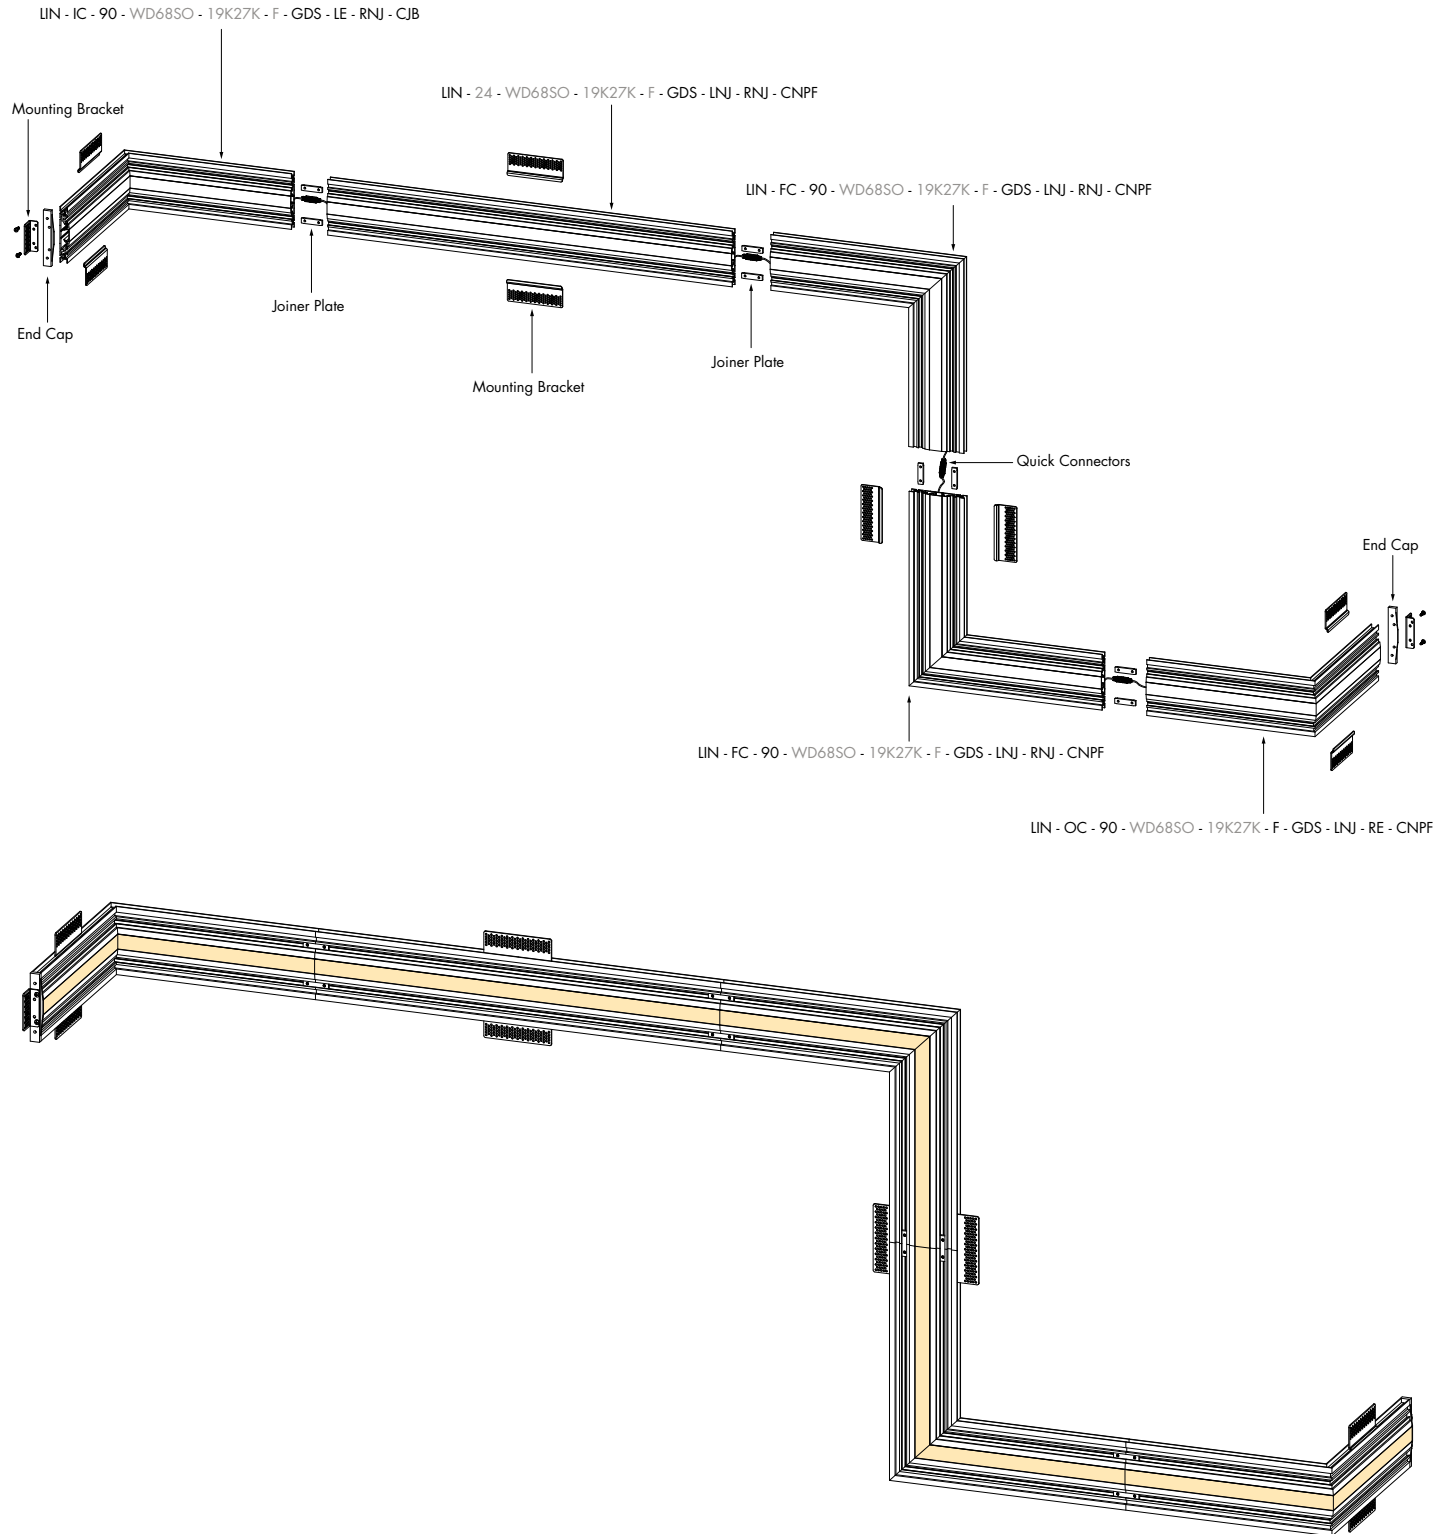

**Light Transmission and Dotting**

Output Options	Lens/Accessory							
	Frosted				Frosted Silicone			
	100%	50%	10%	1%	100%	50%	10%	1%
<b>Diming Level</b>								
WD68SO - 19K	ND	ND	ND	ND	ND	ND	ND	ND
TW68SO (All On)	ND	ND	ND	ND	ND	ND	ND	ND
TW68SO (1-Channel)	ND	ND	ND	ND	ND	ND	ND	ND
TW68HO (All On)	ND	ND	ND	ND	ND	ND	ND	ND
TW68HO (1-Channel)	ND	ND	ND	ND	ND	ND	ND	ND
RGBW36SO	ND	ND	ND	ND	ND	ND	ND	ND
RGBW36HO	ND	ND	ND	ND	ND	ND	ND	ND
RGB42SO	ND	ND	ND	ND	ND	ND	ND	ND
RGB42HO	ND	ND	ND	ND	ND	ND	ND	ND
RGBWX18SO	SD	SD	CD	CD	SD	SD	CD	CD
RGBX18SO	SD	SD	CD	CD	SD	SD	CD	CD
<b>Transmission Percentage</b>	100%				107%			



**CD SD ND**  
**CD** - Clear Dotting  
**SD** - Slight Dotting  
**ND** - No Dotting



**Power Consumption**

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

**Warm Dim (WD68)**

Nominal Length (in)	Actual Length	Watts SO	Nominal Length (in)	Actual Length	Watts SO	Nominal Length (in)	Actual Length	Watts SO	Nominal Length (in)	Actual Length	Watts SO
<b>12</b>	9 15/16	4.6	<b>47</b>	46 14/16	21.0	<b>82</b>	81 5/16	34.8	<b>117</b>	–	–
<b>13</b>	12 7/16	5.8	<b>48</b>	–	–	<b>83</b>	–	–	<b>118</b>	–	–
<b>14</b>	–	–	<b>49</b>	–	–	<b>84</b>	83 13/16	35.7	<b>119</b>	118 4/16	48.3
<b>15</b>	14 14/16	6.9	<b>50</b>	49 5/16	22.0	<b>85</b>	–	–	<b>120</b>	–	–
<b>16</b>	–	–	<b>51</b>	–	–	<b>86</b>	–	–	<b>121</b>	120 11/16	49.1
<b>17</b>	–	–	<b>52</b>	51 13/16	23.0	<b>87</b>	86 4/16	36.7	<b>122</b>	–	–
<b>18</b>	17 6/16	8.0	<b>53</b>	–	–	<b>88</b>	–	–	<b>123</b>	–	–
<b>19</b>	–	–	<b>54</b>	–	–	<b>89</b>	88 11/16	37.6	<b>124</b>	123 3/16	49.9
<b>20</b>	19 13/16	9.1	<b>55</b>	54 4/16	24.1	<b>90</b>	–	–	<b>125</b>	–	–
<b>21</b>	–	–	<b>56</b>	–	–	<b>91</b>	–	–	<b>126</b>	125 10/16	50.6
<b>22</b>	–	–	<b>57</b>	56 12/16	25.1	<b>92</b>	91 3/16	38.6	<b>127</b>	–	–
<b>23</b>	22 4/16	10.2	<b>58</b>	–	–	<b>93</b>	–	–	<b>128</b>	–	–
<b>24</b>	–	–	<b>59</b>	–	–	<b>94</b>	93 10/16	39.6	<b>129</b>	128 1/16	51.5
<b>25</b>	24 12/16	11.3	<b>60</b>	59 3/16	26.1	<b>95</b>	–	–	<b>130</b>	–	–
<b>26</b>	–	–	<b>61</b>	–	–	<b>96</b>	–	–	<b>131</b>	130 9/16	52.5
<b>27</b>	–	–	<b>62</b>	61 10/16	27.1	<b>97</b>	96 1/16	40.5	<b>132</b>	–	–
<b>28</b>	27 3/16	12.3	<b>63</b>	–	–	<b>98</b>	–	–	<b>133</b>	133	53.3
<b>29</b>	–	–	<b>64</b>	–	–	<b>99</b>	98 9/16	41.4	<b>134</b>	–	–
<b>30</b>	29 10/16	13.4	<b>65</b>	64 2/16	28.0	<b>100</b>	–	–	<b>135</b>	–	–
<b>31</b>	–	–	<b>66</b>	–	–	<b>101</b>	–	–	<b>136</b>	135 7/16	54.2
<b>32</b>	–	–	<b>67</b>	66 9/16	29.0	<b>102</b>	101	42.2	<b>137</b>	–	–
<b>33</b>	32 2/16	14.5	<b>68</b>	–	–	<b>103</b>	–	–	<b>138</b>	137 15/16	54.8
<b>34</b>	–	–	<b>69</b>	–	–	<b>104</b>	103 8/16	43.0	<b>139</b>	–	–
<b>35</b>	34 9/16	15.6	<b>70</b>	69	30.0	<b>105</b>	–	–	<b>140</b>	–	–
<b>36</b>	–	–	<b>71</b>	–	–	<b>106</b>	105 15/16	43.9	<b>141</b>	140 6/16	55.4
<b>37</b>	–	–	<b>72</b>	71 8/16	30.9	<b>107</b>	–	–	<b>142</b>	–	–
<b>38</b>	37 1/16	16.7	<b>73</b>	–	–	<b>108</b>	–	–	<b>143</b>	142 13/16	56.2
<b>39</b>	–	–	<b>74</b>	73 15/16	32.0	<b>109</b>	108 6/16	44.8	<b>144</b>	–	–
<b>40</b>	39 8/16	17.8	<b>75</b>	–	–	<b>110</b>	–	–			
<b>41</b>	–	–	<b>76</b>	–	–	<b>111</b>	110 14/16	45.8			
<b>42</b>	41 15/16	18.9	<b>77</b>	76 6/16	33.1	<b>112</b>	–	–			
<b>43</b>	–	–	<b>78</b>	–	–	<b>113</b>	–	–			
<b>44</b>	–	–	<b>79</b>	78 14/16	33.9	<b>114</b>	113 5/16	46.6			
<b>45</b>	44 7/16	20.0	<b>80</b>	–	–	<b>115</b>	–	–			
<b>46</b>	–	–	<b>81</b>	–	–	<b>116</b>	115 12/16	47.5			

**Power Consumption**

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

**Tunable White (TW68)**

Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts
		HO			HO			HO			HO
<b>12</b>	9 15/16	5.9	<b>47</b>	46 14/16	23.1	<b>82</b>	81 5/16	37.3	<b>117</b>	–	–
<b>13</b>	12 7/16	5.9	<b>48</b>	–	–	<b>83</b>	–	–	<b>118</b>	–	–
<b>14</b>	–	–	<b>49</b>	–	–	<b>84</b>	83 13/16	38.5	<b>119</b>	118 4/16	51.5
<b>15</b>	14 14/16	7.4	<b>50</b>	49 5/16	24.0	<b>85</b>	–	–	<b>120</b>	–	–
<b>16</b>	–	–	<b>51</b>	–	–	<b>86</b>	–	–	<b>121</b>	120 11/16	52.5
<b>17</b>	–	–	<b>52</b>	51 13/16	25.4	<b>87</b>	86 4/16	39.5	<b>122</b>	–	–
<b>18</b>	17 6/16	8.4	<b>53</b>	–	–	<b>88</b>	–	–	<b>123</b>	–	–
<b>19</b>	–	–	<b>54</b>	–	–	<b>89</b>	88 11/16	40.9	<b>124</b>	123 2/16	53.0
<b>20</b>	19 13/16	9.8	<b>55</b>	54 4/16	26.3	<b>90</b>	–	–	<b>125</b>	–	–
<b>21</b>	–	–	<b>56</b>	–	–	<b>91</b>	–	–	<b>126</b>	125 10/16	53.5
<b>22</b>	–	–	<b>57</b>	56 12/16	27.7	<b>92</b>	91 3/16	41.8	<b>127</b>	–	–
<b>23</b>	22 4/16	10.8	<b>58</b>	–	–	<b>93</b>	–	–	<b>128</b>	–	–
<b>24</b>	–	–	<b>59</b>	–	–	<b>94</b>	93 10/16	43.3	<b>129</b>	128 1/16	54.3
<b>25</b>	24 12/16	12.3	<b>60</b>	59 3/16	28.6	<b>95</b>	–	–	<b>130</b>	–	–
<b>26</b>	–	–	<b>61</b>	–	–	<b>96</b>	–	–	<b>131</b>	130 9/16	54.8
<b>27</b>	–	–	<b>62</b>	61 10/16	29.8	<b>97</b>	96 1/16	44.2	<b>132</b>	–	–
<b>28</b>	27 3/16	13.3	<b>63</b>	–	–	<b>98</b>	–	–	<b>133</b>	133	55.7
<b>29</b>	–	–	<b>64</b>	–	–	<b>99</b>	98 9/16	44.8	<b>134</b>	–	–
<b>30</b>	29 10/16	14.8	<b>65</b>	64 2/16	30.6	<b>100</b>	–	–	<b>135</b>	–	–
<b>31</b>	–	–	<b>66</b>	–	–	<b>101</b>	–	–	<b>136</b>	135 7/16	56.3
<b>32</b>	–	–	<b>67</b>	66 9/16	31.3	<b>102</b>	101	45.7	<b>137</b>	–	–
<b>33</b>	32 2/16	15.8	<b>68</b>	–	–	<b>103</b>	–	–	<b>138</b>	137 15/16	57.4
<b>34</b>	–	–	<b>69</b>	–	–	<b>104</b>	103 8/16	46.3	<b>139</b>	–	–
<b>35</b>	34 9/16	16.8	<b>70</b>	69	32.4	<b>105</b>	–	–	<b>140</b>	–	–
<b>36</b>	–	–	<b>71</b>	–	–	<b>106</b>	105 15/16	47.2	<b>141</b>	140 6/16	58.1
<b>37</b>	–	–	<b>72</b>	71 8/16	33.1	<b>107</b>	–	–	<b>142</b>	–	–
<b>38</b>	37 1/16	18.3	<b>73</b>	–	–	<b>108</b>	–	–	<b>143</b>	142 13/16	59.1
<b>39</b>	–	–	<b>74</b>	73 15/16	34.3	<b>109</b>	108 6/16	47.8	<b>144</b>	–	–
<b>40</b>	39 8/16	19.3	<b>75</b>	–	–	<b>110</b>	–	–			
<b>41</b>	–	–	<b>76</b>	–	–	<b>111</b>	110 14/16	48.9			
<b>42</b>	41 15/16	20.7	<b>77</b>	76 6/16	35.2	<b>112</b>	–	–			
<b>43</b>	–	–	<b>78</b>	–	–	<b>113</b>	–	–			
<b>44</b>	–	–	<b>79</b>	78 14/16	36.4	<b>114</b>	113 5/16	49.7			
<b>45</b>	44 7/16	21.7	<b>80</b>	–	–	<b>115</b>	–	–			
<b>46</b>	–	–	<b>81</b>	–	–	<b>116</b>	115 12/16	50.8			

**Power Consumption**

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

**RGBW & RGB (RGBW36 & RGB42)**

Nominal Length (in)	Actual Length	Watts				Nominal Length (in)	Actual Length	Watts				Nominal Length (in)	Actual Length	Watts				Nominal Length (in)	Actual Length	Watts			
		RGBW36		RGB42				RGBW36		RGB42				RGBW36		RGB42				RGBW36		RGB42	
		SO	HO	SO	HO			SO	HO	SO	HO			SO	HO	SO	HO			SO	HO	SO	HO
<b>12</b>	11 15/16	4.0	7.3	4.4	8.6	<b>47</b>	—	—	—	—	<b>82</b>	—	—	—	—	<b>117</b>	116 4/16	37.1	66.2	41.3	73.1		
<b>13</b>	—	—	—	—	—	<b>48</b>	47 6/16	15.1	28.8	17.5	32.7	<b>83</b>	82 13/16	26.8	50.8	30.0	55.0	<b>118</b>	—	—	—	—	
<b>14</b>	13 14/16	4.5	8.5	5.2	10.0	<b>49</b>	—	—	—	—	<b>84</b>	—	—	—	—	<b>119</b>	118 4/16	37.8	67.5	41.9	74.0		
<b>15</b>	—	—	—	—	—	<b>50</b>	49 5/16	15.8	30.0	18.3	34.0	<b>85</b>	84 12/16	27.4	51.9	30.7	56.2	<b>120</b>	—	—	—	—	
<b>16</b>	15 14/16	5.1	9.7	5.9	11.3	<b>51</b>	—	—	—	—	<b>86</b>	—	—	—	—	<b>121</b>	120 3/16	38.6	68.7	42.6	74.9		
<b>17</b>	—	—	—	—	—	<b>52</b>	51 5/16	16.4	31.2	18.9	35.1	<b>87</b>	86 12/16	28.0	52.9	31.4	57.3	<b>122</b>	—	—	—	—	
<b>18</b>	17 13/16	5.6	10.9	6.7	12.6	<b>53</b>	—	—	—	—	<b>88</b>	—	—	—	—	<b>123</b>	122 3/16	39.2	69.7	43.2	75.3		
<b>19</b>	—	—	—	—	—	<b>54</b>	53 4/16	17.0	32.4	19.6	36.3	<b>89</b>	88 11/16	28.6	53.8	32.2	58.4	<b>124</b>	—	—	—	—	
<b>20</b>	19 13/16	6.2	12.1	7.4	13.9	<b>55</b>	—	—	—	—	<b>90</b>	—	—	—	—	<b>125</b>	124 2/16	39.7	70.7	43.8	75.7		
<b>21</b>	—	—	—	—	—	<b>56</b>	55 4/16	17.6	33.5	20.3	37.5	<b>91</b>	90 11/16	29.2	54.8	32.9	59.5	<b>126</b>	—	—	—	—	
<b>22</b>	21 12/16	6.7	13.3	8.2	15.2	<b>57</b>	—	—	—	—	<b>92</b>	—	—	—	—	<b>127</b>	126 2/16	40.3	71.7	44.4	76.1		
<b>23</b>	—	—	—	—	—	<b>58</b>	57 3/16	18.2	34.7	21.0	38.7	<b>93</b>	92 10/16	29.9	55.8	33.6	60.5	<b>128</b>	—	—	—	—	
<b>24</b>	23 12/16	7.3	14.5	8.9	16.6	<b>59</b>	—	—	—	—	<b>94</b>	—	—	—	—	<b>129</b>	128 1/16	40.8	72.8	45.0	76.6		
<b>25</b>	—	—	—	—	—	<b>60</b>	59 3/16	18.9	35.9	21.7	39.8	<b>95</b>	94 10/16	30.2	56.3	34.0	61.1	<b>130</b>	—	—	—	—	
<b>26</b>	25 11/16	8.0	15.7	9.6	18.0	<b>61</b>	—	—	—	—	<b>96</b>	—	—	—	—	<b>131</b>	130 1/16	41.4	73.8	45.6	77.0		
<b>27</b>	—	—	—	—	—	<b>62</b>	61 2/16	19.5	37.1	22.4	41.1	<b>97</b>	96 9/16	30.8	57.2	34.7	62.2	<b>132</b>	—	—	—	—	
<b>28</b>	27 11/16	8.6	17.0	10.4	19.4	<b>63</b>	—	—	—	—	<b>98</b>	—	—	—	—	<b>133</b>	132	41.9	74.8	46.3	77.4		
<b>29</b>	—	—	—	—	—	<b>64</b>	63 2/16	20.2	38.4	23.2	42.4	<b>99</b>	98 9/16	31.3	57.9	35.4	63.4	<b>134</b>	134	42.5	75.5	46.8	78.1
<b>30</b>	29 10/16	9.3	18.2	11.1	20.7	<b>65</b>	—	—	—	—	<b>100</b>	—	—	—	—	<b>135</b>	—	—	—	—	—		
<b>31</b>	—	—	—	—	—	<b>66</b>	65 1/16	20.8	39.7	24.0	43.7	<b>101</b>	100 8/16	31.9	58.6	36.0	64.7	<b>136</b>	135 15/16	43.1	76.3	47.3	78.8
<b>32</b>	31 10/16	9.7	18.8	11.5	21.4	<b>67</b>	—	—	—	—	<b>102</b>	—	—	—	—	<b>137</b>	—	—	—	—	—		
<b>33</b>	—	—	—	—	—	<b>68</b>	67 1/16	21.5	41.0	24.7	45.1	<b>103</b>	102 8/16	32.4	59.3	36.7	65.9	<b>138</b>	137 15/16	43.7	77.0	47.8	79.6
<b>34</b>	33 9/16	10.3	20.0	12.2	22.8	<b>69</b>	—	—	—	—	<b>104</b>	—	—	—	—	<b>139</b>	—	—	—	—	—		
<b>35</b>	—	—	—	—	—	<b>70</b>	69	22.1	42.3	25.5	46.4	<b>105</b>	104 7/16	32.9	60.0	37.3	67.2	<b>140</b>	139 14/16	44.3	77.7	48.3	80.3
<b>36</b>	35 9/16	11.0	21.3	13.0	24.2	<b>71</b>	71	22.8	43.5	26.3	47.8	<b>106</b>	—	—	—	—	<b>141</b>	—	—	—	—	—	
<b>37</b>	—	—	—	—	—	<b>72</b>	—	—	—	—	<b>107</b>	106 7/16	33.5	60.7	38.0	68.4	<b>142</b>	141 14/16	44.9	78.5	48.8	81.0	
<b>38</b>	37 8/16	11.7	22.5	13.7	25.6	<b>73</b>	72 15/16	23.5	44.8	26.9	49.0	<b>108</b>	—	—	—	—	<b>143</b>	—	—	—	—	—	
<b>39</b>	—	—	—	—	—	<b>74</b>	—	—	—	—	<b>109</b>	108 6/16	34.0	61.4	38.6	69.7	<b>144</b>	143 13/16	45.5	79.2	49.3	81.7	
<b>40</b>	39 8/16	12.4	23.8	14.5	27.0	<b>75</b>	74 15/16	24.1	46.0	27.6	50.2	<b>110</b>	—	—	—	—	—	—	—	—	—	—	
<b>41</b>	—	—	—	—	—	<b>76</b>	—	—	—	—	<b>111</b>	110 6/16	34.8	62.6	39.3	70.5	—	—	—	—	—	—	
<b>42</b>	41 7/16	13.1	25.0	15.2	28.5	<b>77</b>	76 14/16	24.8	47.2	28.2	51.4	<b>112</b>	—	—	—	—	—	—	—	—	—	—	
<b>43</b>	—	—	—	—	—	<b>78</b>	—	—	—	—	<b>113</b>	112 5/16	35.6	63.8	39.9	71.4	—	—	—	—	—	—	
<b>44</b>	43 7/16	13.8	26.3	16.0	29.9	<b>79</b>	78 14/16	25.4	48.4	28.8	52.6	<b>114</b>	—	—	—	—	—	—	—	—	—	—	
<b>45</b>	—	—	—	—	—	<b>80</b>	—	—	—	—	<b>115</b>	114 5/16	36.3	65.0	40.6	72.3	—	—	—	—	—	—	
<b>46</b>	45 6/16	14.4	27.5	16.8	31.3	<b>81</b>	80 13/16	26.1	49.6	29.4	53.8	<b>116</b>	—	—	—	—	—	—	—	—	—	—	

**Power Consumption**

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

**PIXEL (RGBX18/RGBWX18)**

Nominal Length (in)	Actual Length	Watts		Nominal Length (in)	Actual Length	Watts		Nominal Length (in)	Actual Length	Watts		Nominal Length (in)	Actual Length	Watts	
		RGBX18	RGBWX18			RGBX18	RGBWX18			RGBX18	RGBWX18			RGBX18	RGBWX18
		SO	SO			SO	SO			SO	SO			SO	SO
<b>12</b>	11 15/16	4.6	5.7	<b>47</b>	--	--	--	<b>82</b>	--	--	--	<b>117</b>	--	--	--
<b>13</b>	--	--	--	<b>48</b>	47 6/16	17.4	21.9	<b>83</b>	82 13/16	29.8	37.1	<b>118</b>	--	--	--
<b>14</b>	--	--	--	<b>49</b>	--	--	--	<b>84</b>	--	--	--	<b>119</b>	118 4/16	40.9	51.2
<b>15</b>	--	--	--	<b>50</b>	--	--	--	<b>85</b>	--	--	--	<b>120</b>	--	--	--
<b>16</b>	15 14/16	6.1	7.5	<b>51</b>	--	--	--	<b>86</b>	--	--	--	<b>121</b>	--	--	--
<b>17</b>	--	--	--	<b>52</b>	51 5/16	18.9	23.7	<b>87</b>	86 12/16	31.1	38.7	<b>122</b>	--	--	--
<b>18</b>	--	--	--	<b>53</b>	--	--	--	<b>88</b>	--	--	--	<b>123</b>	122 3/16	42.1	52.8
<b>19</b>	--	--	--	<b>54</b>	--	--	--	<b>89</b>	--	--	--	<b>124</b>	--	--	--
<b>20</b>	19 13/16	7.6	9.4	<b>55</b>	--	--	--	<b>90</b>	--	--	--	<b>125</b>	--	--	--
<b>21</b>	--	--	--	<b>56</b>	55 4/16	20.3	25.4	<b>91</b>	90 11/16	32.4	40.3	<b>126</b>	--	--	--
<b>22</b>	--	--	--	<b>57</b>	--	--	--	<b>92</b>	--	--	--	<b>127</b>	126 2/16	43.3	54.3
<b>23</b>	--	--	--	<b>58</b>	--	--	--	<b>93</b>	--	--	--	<b>128</b>	--	--	--
<b>24</b>	23 12/16	9.1	11.3	<b>59</b>	--	--	--	<b>94</b>	--	--	--	<b>129</b>	--	--	--
<b>25</b>	--	--	--	<b>60</b>	59 3/16	21.7	27.1	<b>95</b>	94 10/16	33.4	41.6	<b>130</b>	--	--	--
<b>26</b>	--	--	--	<b>61</b>	--	--	--	<b>96</b>	--	--	--	<b>131</b>	130 1/16	44.5	55.9
<b>27</b>	--	--	--	<b>62</b>	--	--	--	<b>97</b>	--	--	--	<b>132</b>	--	--	--
<b>28</b>	27 11/16	10.6	13.2	<b>63</b>	--	--	--	<b>98</b>	--	--	--	<b>133</b>	--	--	--
<b>29</b>	--	--	--	<b>64</b>	63 2/16	23.0	28.8	<b>99</b>	98 9/16	34.6	43.2	<b>134</b>	134	45.7	57.4
<b>30</b>	--	--	--	<b>65</b>	--	--	--	<b>100</b>	--	--	--	<b>135</b>	--	--	--
<b>31</b>	--	--	--	<b>66</b>	--	--	--	<b>101</b>	--	--	--	<b>136</b>	--	--	--
<b>32</b>	31 10/16	11.7	14.6	<b>67</b>	--	--	--	<b>102</b>	--	--	--	<b>137</b>	--	--	--
<b>33</b>	--	--	--	<b>68</b>	67 1/16	24.4	30.5	<b>103</b>	102 8/16	35.9	44.8	<b>138</b>	137 15/16	46.9	58.9
<b>34</b>	--	--	--	<b>69</b>	--	--	--	<b>104</b>	--	--	--	<b>139</b>	--	--	--
<b>35</b>	--	--	--	<b>70</b>	--	--	--	<b>105</b>	--	--	--	<b>140</b>	--	--	--
<b>36</b>	35 9/16	13.1	16.5	<b>71</b>	71	25.8	32.3	<b>106</b>	--	--	--	<b>141</b>	--	--	--
<b>37</b>	--	--	--	<b>72</b>	--	--	--	<b>107</b>	106 7/16	37.2	46.4	<b>142</b>	141 14/16	48.0	60.4
<b>38</b>	--	--	--	<b>73</b>	--	--	--	<b>108</b>	--	--	--	<b>143</b>	--	--	--
<b>39</b>	--	--	--	<b>74</b>	--	--	--	<b>109</b>	--	--	--	<b>144</b>	--	--	--
<b>40</b>	39 8/16	14.6	18.3	<b>75</b>	74 15/16	27.1	33.9	<b>110</b>	--	--	--				
<b>41</b>	--	--	--	<b>76</b>	--	--	--	<b>111</b>	110 6/16	38.4	48.0				
<b>42</b>	--	--	--	<b>77</b>	--	--	--	<b>112</b>	--	--	--				
<b>43</b>	--	--	--	<b>78</b>	--	--	--	<b>113</b>	--	--	--				
<b>44</b>	43 7/16	16.0	20.1	<b>79</b>	78 14/16	28.4	35.5	<b>114</b>	--	--	--				
<b>45</b>	--	--	--	<b>80</b>	--	--	--	<b>115</b>	114 5/16	39.7	49.6				
<b>46</b>	--	--	--	<b>81</b>	--	--	--	<b>116</b>	--	--	--				

### Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
<b>5</b>	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
<b>10</b>	544.1	342.2	215.1	135.3	85.1	53.5	33.7
<b>15</b>	362.7	228.1	143.4	90.2	56.7	35.7	22.4
<b>20</b>	272.0	171.1	107.6	67.7	42.6	26.8	16.8
<b>25</b>	217.6	136.9	86.1	54.1	34.0	21.4	13.5
<b>30</b>	181.4	114.1	71.7	45.1	28.4	17.8	11.2
<b>35</b>	155.5	97.8	61.5	38.7	24.3	15.3	9.6
<b>40</b>	136.0	85.5	53.8	33.8	21.3	13.4	8.4
<b>45</b>	120.9	76.0	47.8	30.1	18.9	11.9	7.5
<b>50</b>	108.8	68.4	43.0	27.1	17.0	10.7	6.7
<b>55</b>	98.9	62.2	39.1	24.6	15.5	9.7	6.1
<b>60</b>	90.7	57.0	35.9	22.6	14.2	8.9	5.6
<b>65</b>	83.7	52.6	33.1	20.8	13.1	8.2	5.2
<b>70</b>	77.7	48.9	30.7	19.3	12.2	7.6	4.8
<b>75</b>	72.5	45.6	28.7	18.0	11.3	7.1	4.5
<b>80</b>	68.0	42.8	26.9	16.9	10.6	6.7	4.2
<b>85</b>	64.0	40.3	25.3	15.9	10.0	6.3	4.0
<b>90</b>	60.5	38.0	23.9	15.0	9.5	5.9	3.7
<b>96</b>	56.7	35.6	22.4	14.1	8.9	5.6	3.5

## Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.


### For use with Warm Dim, WD68

#### Ordering Code Phase Dimming Power Supply 1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	OUTPUT CONTROL
PS - Power Supply, 120-277VAC	PH - Phase Dimming (Triac, ELV, MLV)	D - Dry	96 - 96 Watts	24 - 24 VDC	DC - Direct Current

MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart [\(Link\)](#)

MODELS	96W
Length	8.25"
Width	4.10"
Depth	1.56"

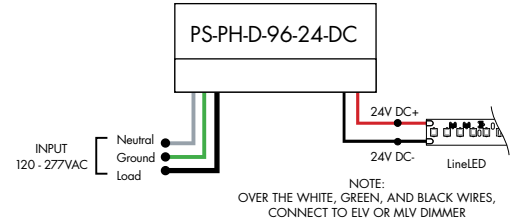


### For use with Tunable White, TW68

#### Ordering Code DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	OUTPUT CONTROL
PS - Power Supply, 120-277VAC	DALI-DT8 - DALI DT8 Tunable White (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC	PWM - Pulse Width Modulation


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

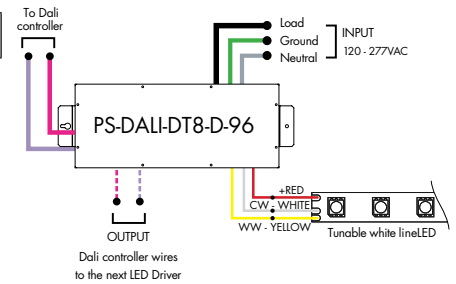

### Athena DALI2-DT8 LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	DALI-DT8 - DALI DT8 Tunable White	D - Dry	96 - 96 W	24 - 24 VDC	AWNDR - Athena

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

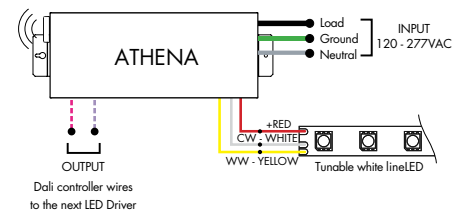

## Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.


### For use with Tunable White, TW68

## Ordering Code VintageDim® 0 - 10V Dimming Power Supplies 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-WD - 0-10V Dimming, Standard Warm Dim Curve (with Tunable White LED) 010V-TW - 0-10V Dimming, Two Channel Control, Brightness and CCT1-CCT2 Ratio 010V-2CH - 0-10V Dimming, Two Channel Control, LED1 Brightness and LED2 Brightness 010V-WDX - 0-10V Dimming, Customizable Warm Dim Curve (with Tunable White LED) 010V-2CHX - 0-10V Dimming, Two Channel Control, Customizable Brightness and CCT1-CCT2 Ratio	D-Dry	96 - 96 Watts 3X96 - 3x96 Watts <sup>1</sup>	24 - 24 VDC

1 - 3x96 is only available with input control options 010V-WD and 010V-TW  
 2 - Athena only available on 96 watts option


MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

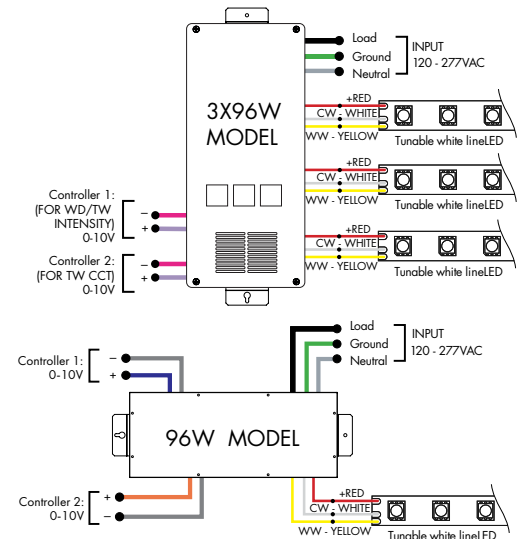

### Athena 0-10V Warm Dim LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-WD - 0-10V Dimming, Standard Warm Dim Curve (with Dynamic White LED)	D-Dry	96-96 W	24-24 VDC	AWNDR-Athena


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

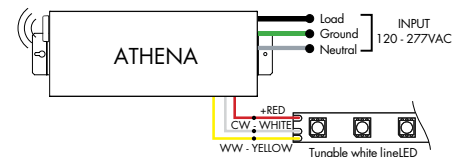

### Athena 0-10V Two Channel LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-2CH - 0-10V Dimming Two Channel Control, LED1 Brightness and LED2 Brightness	D-Dry	96-96 W	24-24 VDC	AWNDR-Athena

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

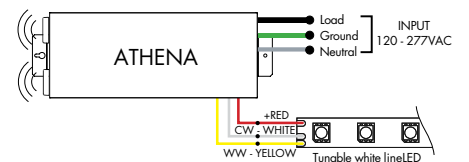

### Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.



**For use with RGB/RGBW, RGB42/RGBW36 or with Tunable White, TW68**

Requires Controller

#### Ordering Code DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3X96-3X96 Watts	24-24 VDC

MODELS	96W	3X96
<b>Length</b>	14.40"	15.00"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.56"

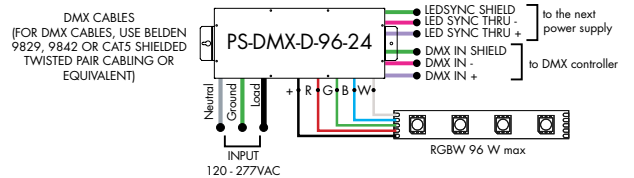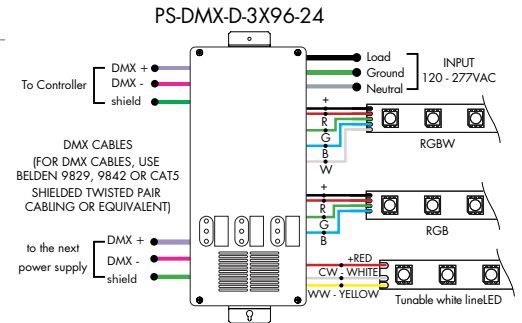


**For use with RGB/RGBW/Pixel, RGB42/RGBW36/RGBX18/RGBWX18**

Requires Controller and Decoder

#### Ordering Code Non-Dimming Power Supply 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

MODELS	96W
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

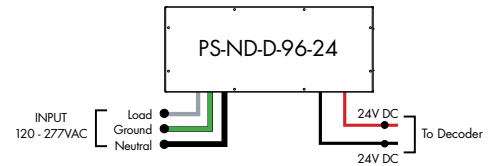

**For use with RGB/RGBW/Pixel, RGB42/RGBW36/RGBX18/RGBWX18**



Requires Controller and Decoder

#### Ordering Code Universal Dimming Power Supplies 1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI-0-10V Dimming, Phase Dimming	D-Dry W-Wet	30-30 Watts 60-60 Watts 96-96 Watts 3x96-3x96 Watts	24-24 VDC

Compatibility: View a complete list of compatible dimmers on product page [\(Link\)](#)

0-10V - 1% dimming  
MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart

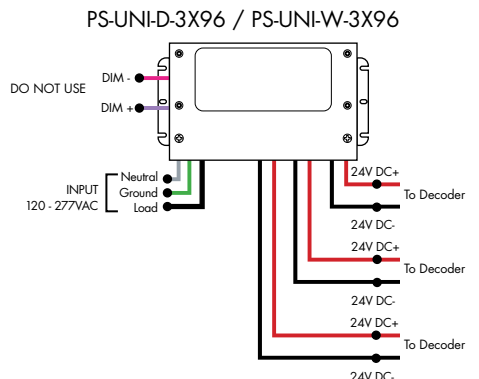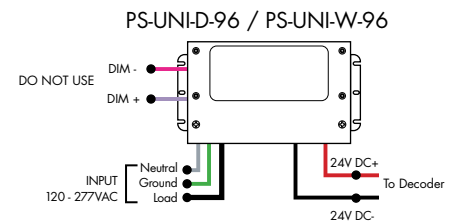

MODELS	PS-UNI-W-30W	PS-UNI-W-60W	PS-UNI-W-96W	PS-UNI-W-3X96W
<b>Length</b>	6.50"	7.40"	8.66"	11.85"
<b>Width</b>	3.73"	3.73"	3.73"	4.32"
<b>Depth</b>	1.61"	1.61"	1.61"	1.81"

MODELS	PS-UNI-D-30W	PS-UNI-D-60W	PS-UNI-D-96W	PS-UNI-D-3X96W
<b>Length</b>	8.77"	8.77"	8.11"	9.94"
<b>Width</b>	4.27"	4.27"	5.60"	7.61"
<b>Depth</b>	1.83"	1.83"	1.83"	2.02"



**Controllers and Decoders**

**For use with Tunable White Power Supplies**



MODEL

**DTW-MC**

DTW-MC - Tunable White controller

Tunable White wall-mount controller controls lighting fixtures, wireless control of TW lighting fixture. Fits in any standard US switch box. Includes all the outputs in the back of the controller.

**Features**

- Switch & dimming control function, control range > 20M.
- Smooth transition between light levels.
- Separately operate dimming and color temperature functions.
- Able to control 1 zone with endless receivers. Each receiver can maximally be controlled by 8 remotes.
- Power, temperature color and dimming functions operated by push button after receivers are connected.

**Operating Voltage**

3V DC battery

**Color Parameters**

- Brightness
- Saturation
- Fading



MODEL

**TW-DMX**

TW-DMX - DMX controller

Tunable White DMX wall-mount controller is a fully touch sensitive controller designed in accordance with standard protocol DMX512. Offers fast and accurate color temperature adjustment and brightness dimming of natural white, warm white and cold white. Designed with a touch color wheel, the DMX512 controller can adjust color temperature and brightness for all white LEDs smoothly and accurately. The DMX controller can control 1 zone with endless decoders.

**Features**

- 1 zone
- 6 color scenes
- DMX Control
- Touch Sensitive Glass Surface
- Dimming and Speed Control
- Memory Function
- Easily Fits Standard US Switch Boxes

**Operating Voltage**

12 - 24V DC

**Color Parameters**

- Brightness
- Saturation
- Primary colors
- Fading
- Color changing speed



MODEL

**SLD-DIMTW**

SLD-DIMTW - Tunable white LED dimming module

The SLD DimTW is a constant voltage warm dimming LED dimming module. The unique dimming module accepts 0-10V control and mimics a smooth, incandescent dimming curve.

**Features**

- Flicker free 0-100% dimming
- High efficiency up to 97%
- High precision dimming ratio:>1:1000
- Fully isolated plastic housing
- Comply with EN55015 and FCC part 15 without additional input filter and capacitors
- compact size, high reliability
- 3 years warranty

**Operating Voltage**

8-48 VDC

**Controllers and Decoders**

**For use with Tunable White, RGB/RGBW Power Supplies**



The RGBW receiver is easily paired with controller by the click of a button. Receiver can be reset to factory settings at any time.

Each receiver can store one static RGB color, one color sequence, and one brightness setting for the white LED strip. Receivers assigned to the same scene within the same zone will have the same LED static color and color sequence.

**Operating Voltage**  
12-36 VDC

**Operating Temperature Range**  
from -4°F to +122°F in case

**Power Capacity**  
up to 96W at 24V

MODEL

**RGBW-RC-R**

RGBW-RC-R - RGBW receiver



Extends identical signal when connected in series to an RGBW LED control system. The RGBW signal repeater works with Luminii RGB and RGBW controllers, receivers, and decoders.

RGBW signal can be extended indefinitely when adequate power supply (not included) is connected to the system.

**Operating Voltage**  
12-36 VDC

**Operating Temperature Range**  
from -4°F to +122°F in case

**Power Capacity**  
up to 96W at 24V

MODEL

**RGBW-SR**

RGBW-SR - RGBW signal repeater



Translates controller DMX512 programs for RGB and white LED strips.

Unique DMX address for the decoder can be set easily and displayed by the numeric display on the case. Changing and resetting the DMX address requires manual input.

Use power repeater to expand output.

**Operating Voltage**  
12-36 VDC

**Operating Temperature Range**  
from -4°F to +122°F in case

**Power Capacity**  
up to 96W at 24V

MODEL

**DDMX-RGBW**

DDMX-RGBW - DMX decoder

**Controllers and Decoders**

**For use with RGB/RGBW Power Supplies**



MODEL

**RGBW-MC3**

RGBW-MC3 - 4-zone RGBW controller

Easy to operate wireless interface suitable for static or color changing scenes. Control 4 different color zones separately or at the same time. RGBW receiver (RGBW-RC-R) required for operation. Assign multiple receivers per zone to cover a large area.

Color wheel enables highly stable and sensitive color control functionality. Create your own color changing sequences with ease and flexibility.


**Power**  
qty 3 AAA batteries

**Scenes**  
up to 4 unique zones

**Signal**  
Wireless (RF)

**Energy Saving**  
Deactivates after 10 seconds of inactivity

- Color Parameters**
- Brightness
  - Saturation
  - Primary colors
  - Speed of color changing sequence
  - Fading

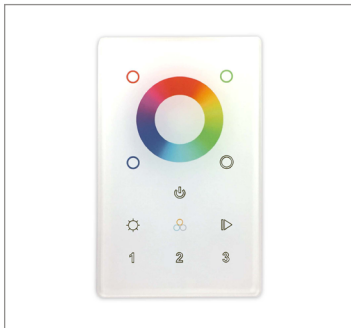

MODEL

ZONES

COLOR

DMX - DMX Controller	3Z - Three Zone 1Z - One Zone	RGBW - Red, Green, Blue, & White
----------------------	----------------------------------	----------------------------------

DMX /Wireless RGB-W wall-mount controller controls DMX lighting fixtures, wireless control of RGB-W lighting fixture or use both simultaneously. Fits in any standard US switch box. Includes all the outputs in the back of the controller.


Control brightness levels with a single touch, personalize and memorize 3 different scenes, and even create 3 variations of white.

- Features**
- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
  - 65,000 Color Options, Dimming and Speed Control
  - Memory Function
  - 50 Foot Wireless Range
  - Easily Fits Standard US Switch Boxes
  - Touch Sensitive Glass Surface
  - Includes 10 Built in Programs, or Create and Play Your Own

**Operating Voltage**  
12 - 24V DC

- Color Parameters**
- Brightness
  - Saturation
  - Primary colors
  - Fading
  - Color changing speed

**For use with Tunable White, RGB/RGBW, Pixel Power Supplies**



MODEL

**TSDMX-E**

TSDMX-E - Touchscreen DMX controller

Programmable advanced DMX512 lighting controller featuring a touch-screen interface. Operates as stand alone controller or integrated with most architectural lighting control systems. Can controller endless DMX512 enabled devices.

Mounts to standard single or dual gang wall box with the included power supply inside the junction box. Terminal block design for power and data connections.

- Features**
- Sleek glass design which sits 0.43" from the wall
  - Graphical color display to show selected environment
  - Color/dimmer/speed palette
  - Color temperature mixing
  - Touch sensitive buttons. No mechanical parts
  - Touch sensitive wheel allows for accurate color selection
  - Multi-zone microSD memory
  - Multi-room control with 500 scenes, 10 zones
  - 1024 DMX channels. Control 340 RGB fixtures
  - USB & Ethernet connectivity for programming and control

**Power Supply**  
7 VDC (included)

**Programmability**  
PC, Mac, Tablet, Smartphone

**Output Signal**  
DMX512 (1024 channels)

- Color Parameters**
- Brightness
  - Saturation
  - Speed of color changing sequence
  - Fading / dimming / brightness

**Controllers and Decoders**

**For use with Pixel Power Supplies**



MODEL

**SR-DMX-SPI**

SR-DMX-SPI - Smart Pixel Decoder

The SR-DMX-SPI is a smart LED pixel decoder that controls RGB/RGBW pixel LED strips with SPI signal. Designed with an OLED backlit panel, the pixel controller allows for easy configuration of most settings. Four push buttons are available for control of the LED functions.  
\*For pixel only.

**Features**

- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
- SPI signal output for RGB/RGBW pixel light control
- DMX512 controllable and RF/WIFI remote controllable
- Capable of addressing up to 1020 RGB pixels & 765 RGBW pixels
- OLED panel allows for easy configuration

**Operating Voltage**

12 - 36V DC

**Power capacity**

up to 96W at 24V

**Operating temperature range**

from -4°F to +122°F in case

**For use with Tunable White, RGB/RGBW Power Supplies**



MODEL

**DDMX-5CH-RDM-PRO**

DDMX-5CH-RDM-PRO-DMX512 Decoder

DMX512 decoder with RDM functionality features 5 PWM output channels with common anode. High PWM output frequency range allows the product to be used in HD video conferencing spaces. All DMX products to be installed per DMX512 Standard.

**Power**

96 Watt

**Inputs**

RJ45, XLR-5Pin, Terminal Block

**DMX Channels**

1 to 5 settable

**PWM Output Resolution Ratio**

8 or 16 bit

**PWM Output Frequency**

500Hz - 30KHz

**Output Dimming Curve Gamma Value**

0.1 ~ 9.9



MODEL

**RGBW-WI-R**

RGBW-WI-R - WIFI generator

RGBW-WI-R creates a local network that enables any electronic device (phone, tablet, etc.) to control the RGB/W strip connected to a RGBW-RC-R receiver.

The control functions are achieved through a free application download for Android and iOS devices called REALCOLOR.

**Operating Voltage**

12-36 VDC

**Power Supply**

PI-130-24 (included)

**Operating Temperature Range**

from -4°F to +122°F in case