

LUMINII

Kitchen Design Guide



UNDER CABINET

Kitchen lighting should balance form and function—providing the perfect illumination for cooking while elevating key design features like backsplashes and countertops. With thoughtful placement, lighting can enhance texture, add depth, and complement a range of interior styles. For effective task and accent lighting, we recommend three techniques: Counter Direct for focused prep lighting, and Backsplash Wash or Graze to highlight surface detail while maintaining task functionality. In our examples, we feature Luminii’s Kendo M Surface in Static White and Tunable White, Myka 45 in Static White for bright direct or wash applications, and Kendo S Surface in Static White and Tunable White for graze effects.

PRODUCTS USED:

1) Luminii **Kendo 45M**

DOCUMENT NOTES:
1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
2) Additional lumen packages are available. Refer to specification sheets.
3) Silver, Black, White, Bronze finishes are standard; Premium finishes available, contact factory for more information.

• Title 24 / JA8 / Declare
• Dot Free w/ Frosted Lens
• 7-Year Warranty
• 24 VDC Class 2
• 98+ CRI

Declare.       

***Refer to spec sheets for specific product listings


Finish Options

Base	☐ Silver Anodized
Powder Coat	☒ Black ☒ Bronze ☐ White
Premium	☒ Matte Black ☐ Warm Nickel ☐ Aged Brass ☐ Polished Gold ☐ Chrome

COUNTER DIRECT

DETAIL SECTION

Bright and direct. Best for providing task light.

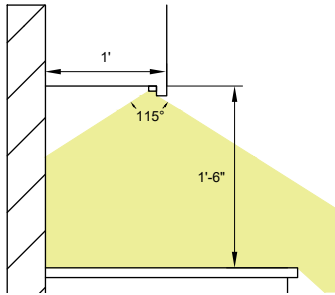

Detail Section: Using Kendo M Frosted Lens
Refer to specification sheet for additional lens options

RENDER




RECOMMENDED LUMINAIRES

- Kendo M Static White**
Part Number: KM-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Option: Myka Static White (Dynamic Color Not Available)**
Part Number: MK-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Kendo M Warm Dim**
Part Number: KM-(length)-WD51-HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo M Wet (Exterior)**
Part Number: KMW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Option: Myka Wet (Dynamic Color Not Available)**
Part Number: MKW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)

- Kendo M Channel:** KMC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Myka Channel: (Dynamic Color Not Available)**
MKC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24

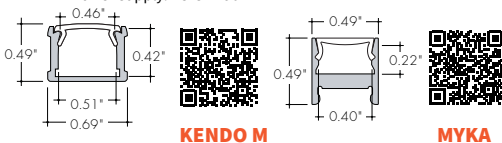


KENDO M

MYKA

BACKSPLASH WASH

DETAIL SECTION

Soft and indirect. Best for a concealing the source. Provides task light while washing the backsplash.

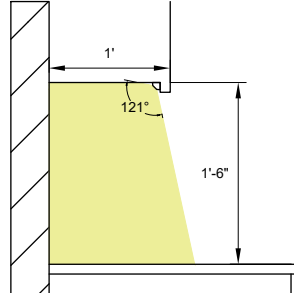

Detail Section: Using Kendo 45M Round Frosted Lens
Refer to specification sheet for additional lens options

RENDER



RECOMMENDED LUMINAIRES

- Kendo 45M Round Static White**
Part Number: K45MR-(length)-(output)-(cct)-RF-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Option: Myka 45 Static White (Dynamic Color Not Available)**
Part Number: MK45-(length)-(output)-(cct)-(lens)-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Kendo 45M Round Warm Dim**
Part Number: K45MR-(length)-WD51-HO-18K-27K-RF-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Kendo 45M Wet (Exterior)**
Part Number: K45MW-(length)-(output)-(cct)-(lens)-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Option: Myka 45 Wet (Dynamic Color Not Available)**
Part Number: MK45W-(length)-(output)-(cct)-(lens)-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)

- Kendo 45M Channel - K45VC-(length)-(lens)-CB-(finish) or Kendo 45MR Channel - K45RC-(length)-(lens)-CB-(finish)**
***Premium finishes available on request
- Myka 45 Channel (Dynamic Color Not Available)**
MK45VC-(length)-(lens)-CB-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24




KENDO 45MR

MYKA 45

BACKSPLASH GRAZE

DETAIL SECTION

Dynamic and direct. Best for featuring textured backsplashes while providing usable task light. Ideal for exterior kitchens.

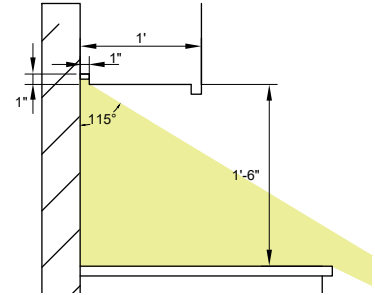

Detail Section: Using Kendo S Frosted Lens
Refer to specification sheet for additional lens options

RENDER




RECOMMENDED LUMINAIRES

- Kendo S Static White**
Part Number: KS-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-WD51-HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)

- Kendo S Channel:** KSC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
***Must use Kendo M with SL65 Connectors

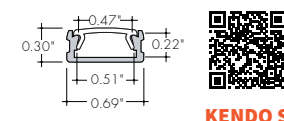

KENDO S

***Products Shown - Refer to specification sheet for more information
***Myka Lens option - Refer to installation guides for details



TOE-KICK

Toe-kick lighting adds a sleek, modern touch to kitchens while providing practical, low-level illumination. For a crisp, defined look, direct toe-kicks create clean lines of light along base cabinets. Looking for something softer? Indirect toe-kicks reduce glare on polished floors and subtly highlight millwork or cabinetry details. For added visual interest, grazing toe-kicks can accent textures on materials like stone or wood, enhancing depth without overwhelming the space. We recommend Luminii's Kendo S Surface Static White or Tunable White, available in damp or wet-rated versions, with an optional graze lens for a more dramatic effect.

PRODUCTS USED:

1) Luminii **Kendo M / Kendo S**

DOCUMENT NOTES:

- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
- 2) Additional lumen packages are available. Refer to specification sheets.
- 3) Silver, Black, White, Bronze finishes are standard; Premium finishes available, contact factory for more information.

- Title 24 / JA8 / Declare
- Dot Free w/ Frosted Lens
- 7-Year Warranty
- 24 VDC Class 2
- 98+ CRI

Declare.

***Refer to spec sheets for specific product listings

Finish Options

Base	☐ Silver Anodized
Powder Coat	☒ Black ☐ Bronze ☐ White
Premium	☐ Matte Black ☐ Warm Nickel ☐ Aged Brass
	☐ Polished Gold ☐ Chrome


UNDER CABINET KITCHEN DESIGN GUIDE



DIRECT

DETAIL SECTION

Bright and direct. Traditional accent to provide low-level illumination.

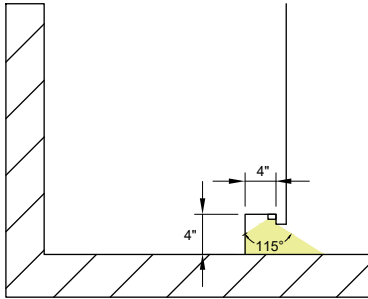


Detail Section: Using Kendo S Frosted Lens
Refer to specification sheet for additional lens options

INDIRECT

DETAIL SECTION

Soft and indirect. Best for glossy floors to avoid unwanted reflection or for a curved millwork where straight runs are not possible.

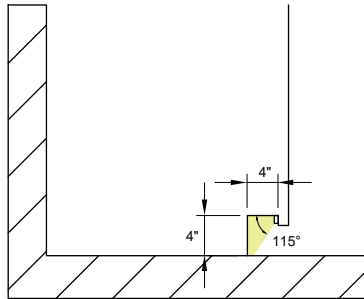


Detail Section: Using Kendo S Frosted Lens
Refer to specification sheet for additional lens options

WASH

DETAIL SECTION

Dynamic and direct, for a dramatic look. Best for exterior kitchens and hardscapes.

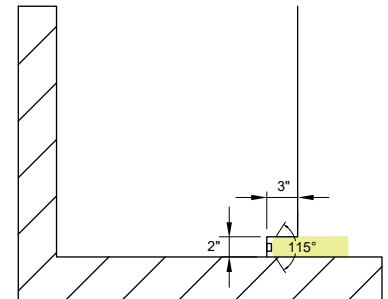

Detail Section: Using Kendo S Frosted Lens
Refer to specification sheet for additional lens options

RENDER



RECOMMENDED LUMINAIRES

- Kendo S Static White**
Part Number: KS-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-WD51-HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24

RENDER



RECOMMENDED LUMINAIRES

- Kendo S Static White**
Part Number: KS-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-WD51-HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24

RENDER



RECOMMENDED LUMINAIRES

- Kendo S Static White**
Part Number: KS-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-WD51-HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)


- Kendo S Channel:** KSC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
***Must use Kendo M with SL65 Connectors

TAPE & CHANNEL (For Field Assembly)

- Kendo S Channel:** KSC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
***Must use Kendo M with SL65 Connectors

TAPE & CHANNEL (For Field Assembly)

- Kendo S Channel:** KSC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
***Must use Kendo M with SL65 Connectors



KENDO S

***Products Shown - Refer to specification sheet for more information



OVER CABINET

Add depth, scale, and warmth to kitchen spaces with thoughtful over-cabinet and cove lighting. In traditional applications, low-level cove simulation can support or even replace downlighting—ideal for kitchens with exposed ceilings or limited overhead space. In rooms with tall ceilings, over-cabinet lighting draws the eye upward, washing the ceiling and enhancing the sense of scale. For forward-throw accent lighting, we recommend Luminii’s Kendo 45M Static White with frosted lens (available in damp or wet-rated versions). For soft, indirect accents, Kendo M with frosted lens is ideal, while Luminii’s mCove Surface Mount in Static White or Tunable White offers high-output general illumination.

PRODUCTS USED:

1) Luminii **Kendo 45M Round**

DOCUMENT NOTES:

- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
- 2) Additional lumen packages are available. Refer to specification sheets.
- 3) Silver, Black, White, Bronze finishes are standard; Premium finishes available, contact factory for more information.

- Title 24 / JA8 / Declare
- Dot Free w/ Frosted Lens
- 7-Year Warranty
- 24 VDC Class 2
- 98+ CRI

Declare

MADE IN U.S.A.

CE

Single Dim
15-30 CRI

RoHS

UL LISTED

TITLE 24
JA8 COMPLIANT

DIM

***Refer to spec sheets for specific product listings


Finish Options

Base	☐ Silver Anodized
Powder Coat	☒ Black ☐ Bronze ☐ White
Premium	☐ Matte Black ☐ Warm Nickel ☐ Aged Brass ☐ Polished Gold ☐ Chrome

FORWARD THROW ACCENT

DETAIL SECTION

Soft and indirect. Traditional accent to highlight the vertical plane and provide cove simulation.

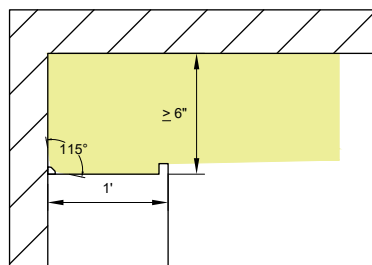

Detail Section: Using Kendo 45M Frosted Lens
Refer to specification sheet for additional lens options

RENDER




RECOMMENDED LUMINAIRES


- Kendo 45M Static White**
Part Number: MK45M-(length)-(output)-(cct)-(lens)-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Option: Myka 45 Static White (Dynamic Color Not Available)**
Part Number: MK45-(length)-(output)-(cct)-(lens)-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Kendo 45M Warm Dim**
Part Number: MK45M-(length)-(output)-WD51-HO-18K-27K-(lens)-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Kendo 45M Wet (Exterior)**
Part Number: K45MW-(length)-(output)-(cct)-(lens)-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Option: Myka 45 Wet (Dynamic Color Not Available)**
Part Number: MK45-(length)-(output)-(cct)-(lens)-CB-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)


- Kendo 45M Channel** - K45VC-(length)-(lens)-CB-(finish) or **Kendo 45MR Channel** - K45RC-(length)-(lens)-CB-(finish)
***Premium finishes available on request
- Myka Channel (Dynamic Color Not Available)**
MK45VC-(length)-(lens)-CB-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24




KENDO 45M



MYKA 45



KENDO M




MYKA

UPLIGHT ACCENT

DETAIL SECTION

Soft and indirect. Traditional accent.

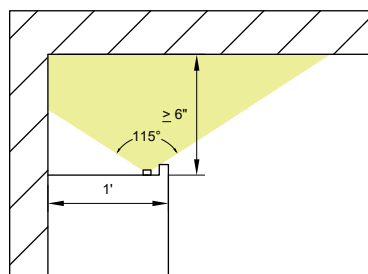

Detail Section: Using Kendo M Frosted Lens
Refer to specification sheet for additional lens options

RENDER



RECOMMENDED LUMINAIRES

- Kendo M Static White**
Part Number: KM-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Option: Myka Static White (Dynamic Color Not Available)**
Part Number: KM-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24
- Kendo M Warm Dim**
Part Number: KMW-(length)-WD51-HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo M Wet (Exterior)**
Part Number: KMW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Option: Myka Wet (Dynamic Color Not Available)**
Part Number: KM-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24


TAPE & CHANNEL (For Field Assembly)

- Kendo M Channel:** KMC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Myka Channel (Dynamic Color Not Available)**
MKC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24

HIGH OUTPUT COVE

DETAIL SECTION

Bright and indirect. Provides cove replacement suitable for general room illumination.

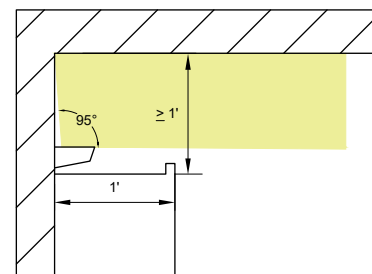


Detail Section: Using MCOVE Long Throw Lens
Refer to specification sheet for additional lens options

RENDER




RECOMMENDED LUMINAIRES

- MCOVE Static White**
Part Number: M-(length)-(output)-(cct)-(reflector)-PR-(left end cap)-(right end cap)-(power feed info)
Power Supply: PS-UNI-96-24
- MCOVE Warm Dim**
Part Number: M-(length)-WD51-HO-18K-27K-(reflector)-PR-(left end cap)-(right end cap)-(power feed info)
Power Supply: PS-UNI-96-24
- MCOVE CORNER Static White**
Part Number: M-(corner)-(angle)-(output)-(cct)-(reflector)-PR-(left end cap)-(right end cap)-(power feed info)
Power Supply: PS-UNI-96-24
- MCOVE Corner Warm Dim**
Part Number: M-(corner)-(angle)-WD51-HO-18K-27K-(reflector)-PR-(left end cap)-(right end cap)-(power feed info)
Power Supply: PS-UNI-96-24
- Option: Kendo M Grazer Static White**
Part Number: KM-(length)-WD51-HO-18K-27K-GR-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Option: Kendo M Grazer Warm Dim**
Part Number: KM-(length)-WD51-HO-18K-27K-GR-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



MCOVE



KENDO M GRAZE

***Products Shown - Refer to specification sheet for More Information
***Myka Products - Refer to specification sheet for Additional Lens Options

CONTINUED HIGH OUT-PUT COVE / MCOVE PRODUCT INFORMATION

TAPE & CHANNEL (For Field Assembly)



Channel: MCAL-(length)-(reflector)-C-PR



Static White: LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: N/A



Warm Dim: LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: N/A


INSTALLATION



MCOVE CORNER OPTION


M-OC

Outer Corner


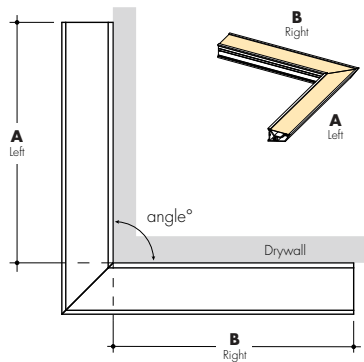


M-IC


Inner Corner

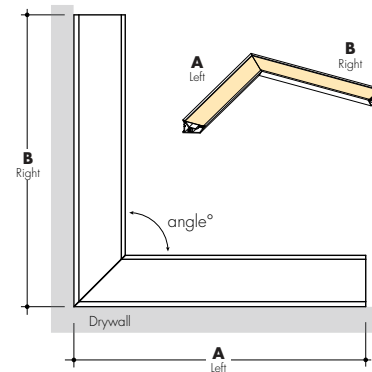

MCOVE REFLECTOR DETAIL

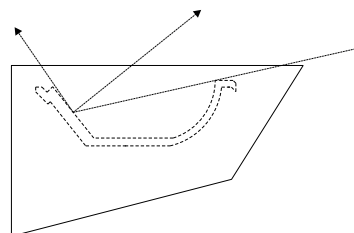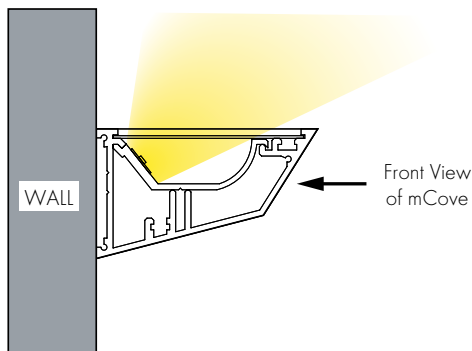

Long Throw



Tall Throw

***Products Shown - Refer to specification sheet for more information

***MCove Corners - Custom Angle Corners are available, please consult Inside Sales with specific request



OVER ISLAND

As the central hub of activity, the kitchen island demands lighting that's both functional and visually refined. From food prep to casual dining, the right lighting elevates the entire kitchen experience. Whether your design leans toward downlighting, suspended fixtures, directional accents, or ambient glows—Luminii has a solution. For a clean, modern look, we recommend the barely-there Stenos micro-optics downlight range, offering seamless, low-profile illumination. For greater flexibility, the Stenos micro-optics Suspended Track system includes directional and ambient options, plus track heads for targeted light. With infinite track shapes and lengths, Stenos adapts beautifully to any kitchen layout.

PRODUCTS USED:

- 1) Stenos Trimless Linear Downlight
- 2) Stenos Suspended Track
- 3) Stenos Directional Module

Finish Options


☒ Black Painted

☐ White Painted

DOWNLIGHT

DETAIL SECTION

Stenos Trimless Linear Downlights

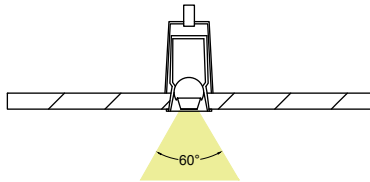

RECOMMENDED LUMINAIRES






Stenos Trimless Linear Downlight Static White
Part Number: SLD-(length)-(cct)-50-(optic)-BK
Power Supply: PS-UNI-96-24



Stenos Trimless Linear Downlight Tunable White
Part Number: SLD-(length)-18K35K-DWSO-(optic)-BK
Power Supply: PS-010V-TW-D-96-24

Detail Section: Using LV60° Optic and Louver
Refer to specification sheet for additional lens options

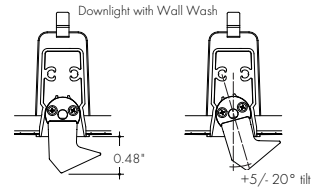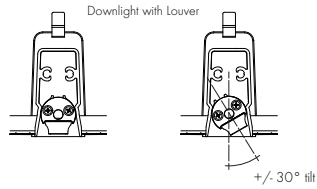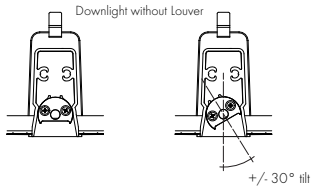

STENOS TRIMLESS MODULES


RENDER




SUSPENDED

DETAIL SECTION

Stenos Suspended Track

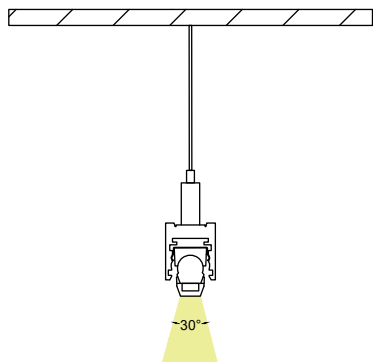

Detail Section: Using LV30° Optic and Louver
Refer to specification sheet for additional lens options




STENOS SUSPENDED



RECOMMENDED LUMINAIRES

- Stenos Suspended Static White**
Part Number: STH-(shape)-(length)-(finish)-(power supply)-(wattage)-(serial number)
Power Supply: PS-UNI-96-24
- Stenos Suspended Warm Dim**
Part Number: STH-(shape)-(length)-(finish)-WD010V-(wattage)-(serial number)
Power Supply: PS-010V-WD-D-96-24
- Stenos Suspended Tunable White**
Part Number: STH-(shape)-(length)-(finish)-TWD8-(wattage)-(serial number)
Power Supply: PS-010V-TW-D-96-24

TRACK MODULES

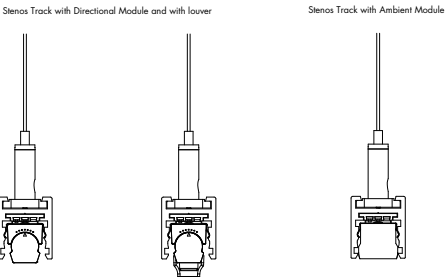


RENDER



DIRECTIONAL & AMBIENT

DETAIL SECTION

Stenos Directional Module

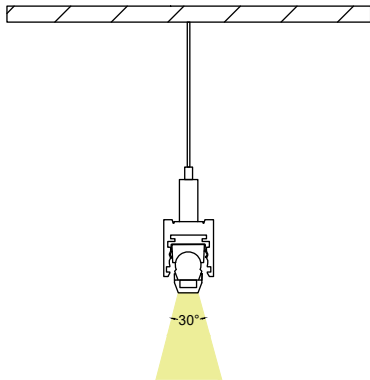

Detail Section: Using LV30° Optic and Louver
Refer to specification sheet for additional lens options




RENDER



RECOMMENDED LUMINAIRES

Stenos Directional Module Static White
Part Number: SMD-(length)-(cct)-SO-(optic)-(finish)
Power Supply: PS-UNI-96-24


Stenos Directional Module Tunable White
Part Number: SMD-(length)-18K35K-TWSO-(optic)-(finish)
Power Supply: PS-010V-TW-D-96-24




STENOS DIRECTIONAL MODULES

DETAIL SECTION

Stenos Ambient Module



Detail Section: Using Ambient Module with Louver
Refer to specification sheet for additional lens options



Detail Section: Using Ambient Module without Louver
Refer to specification sheet for additional lens options


RENDER



RECOMMENDED LUMINAIRES

Stenos Ambient Module Static White
Part Number: SMA-(length)-(cct)-SO-(optic)-(finish)
Power Supply: PS-UNI-96-24

Ambient Module in Surface or Suspended Track



STENOS AMBIENT MODULE





Luminii part numbers and specifications are subject to change at any time.

Please refer to specification sheets on Luminii.com for the most up to date information or contact your local sales representative for more details.

Luminii Design Guides are intended to provide inspiration; please consult with your design professional, contractor, or electrician prior to purchase.

[Have additional questions? Luminii is here to help.](#)

Contact us anytime and we will help guide you to find the perfect products for any application.