

LUMINII

Primary Bath Design Guide





VANITY

Vanity lighting is the cornerstone of a well-lit bathroom—providing essential task lighting and a touch of decorative elegance. For a classic look, opt for over-mirror or side-mounted sconces. For a modern feel, consider recessed mud-in fixtures, decorative pendants, or integrated LED mirror lighting. In our examples, we feature Luminii's Clareo Wall S (vertical and horizontal applications), Kendo M (direct and indirect mirror surrounds), and Linii (for a sleek, recessed finish)—all with frosted lens options for soft, even illumination.

PRODUCTS USED:

- | | |
|-------------------------|--------------------|
| 1) Stenos Downlight 12" | 4) Luminii Kendo M |
| 2) Luminii Clareo Wall | 5) Luminii Kendo M |
| 3) Luminii Linii System | 6) Senso Trident |

DOCUMENT NOTES:
1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
2) Additional lumen packages are available. Refer to specification sheets.
3) Silver, Black, White, Bronze finishes are standard; Premium finishes available, contact factory for more information.

- Title 24 / JA8 / Declare
- Dot Free w/ Frosted Lens
- 7-Year Warranty
- 24 VDC Class 2
- 98+ CRI

Declare

MADE IN U.S.A.

CE

Single Bin
10-30
CCT

RoHS

UL LISTED

TITLE 24
JA8
COMPLIANT

DIM


***Refer to spec sheets for specific product listings

Finish Options	
Base	☐ Silver Anodized
Powder Coat	☒ Black ☐ Bronze ☐ White
Premium	☐ Matte Black ☐ Warm Nickel ☐ Aged Brass ☐ Polished Gold ☐ Chrome

WALL SCONCES - VERTICAL APPLICATION

DETAIL SECTION & ELEVATION VIEW

Classic and Easy Installation
Direct Illumination

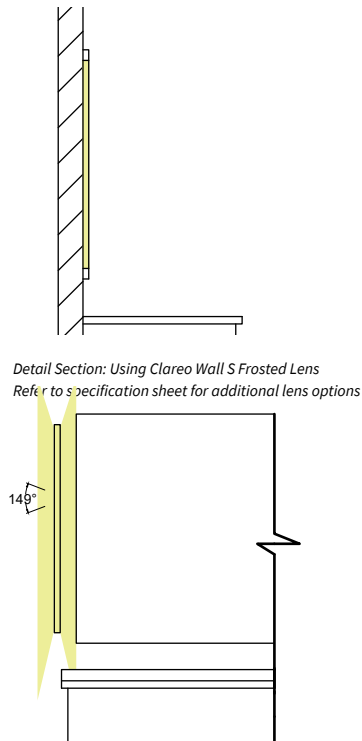


RECOMMENDED LUMINAIRES

Clareo Q Wall Static White
Part Number: CLQW-(length)-(output)-(cct)-F-(finish)

Clareo S Wall Static White
Part Number: CLSW-(length)-(output)-(cct)-F-(finish)

ELV power supplies available to fit in J-box

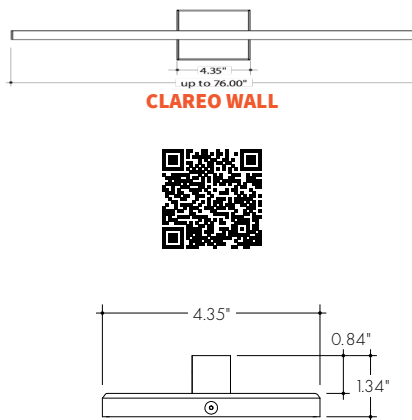


RENDER



WALL SCONCES - HORIZONTAL APPLICATION

DETAIL SECTION

Classic and Easy Installation
Direct Illumination


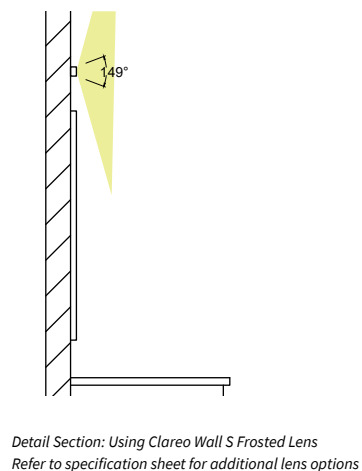


RECOMMENDED LUMINAIRES

Clareo Q Wall Static White
Part Number: CLQW-(length)-(output)-(cct)-F-(finish)

Clareo S Wall Static White
Part Number: CLSW-(length)-(output)-(cct)-F-(finish)

ELV power supplies available to fit in J-box

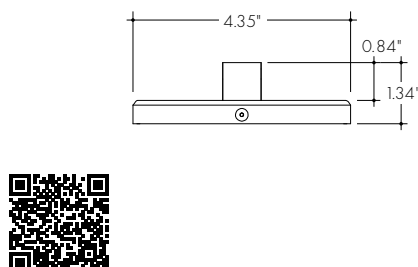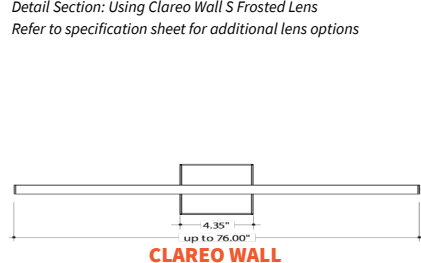

RENDER




***Products Shown - Refer to specification sheet for more information


DIRECT MIRROR SURROUND

DETAIL SECTION


Ambient illumination. Modern accent.
Supplementary downlight recommended.

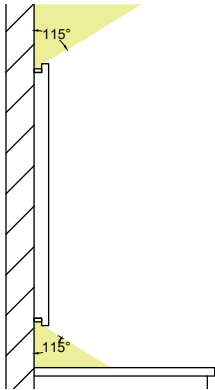

Detail Section: Using Kendo M Frosted Lens
Refer to specification sheet for additional lens options



KENDO M



MYKA

RECOMMENDED LUMINAIRES



Kendo M Static White
Part Number: KM-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Option: Myka Static White (Dynamic Color Not Available)
Part Number: MK-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Kendo M Warm Dim
Part Number: KM-(length)-LLWD51HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Kendo M RGB
Part Number: KM-(length)-RGB42SO-CLR-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-DMX-D-96-24



Kendo M Wet (Exterior)
Part Number: KMW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)



Kendo M Channel: KMC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request



Myka Channel (Dynamic Color Not Available)
MKC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request



Static White: LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24



Warm Dim: LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL CONT.

(For Field Assembly)



Color Changing: LLRGB42-SO-(start feed)-(end feed)-(length)
Power Supply: PS-DMX-D-96-24



Static White Wet: LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24


RENDER




INDIRECT MIRROR SURROUND

DETAIL SECTION


Ambient accent. Best for powder rooms and
water closets where lower light levels are desired.
Supplementary downlight recommended.

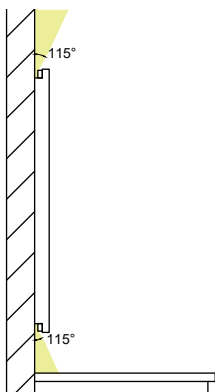

Detail Section: Using Kendo M Frosted Lens
Refer to specification sheet for additional lens options



KENDO M



MYKA

RECOMMENDED LUMINAIRES



Kendo M Static White
Part Number: KM-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Option: Myka Static White (Dynamic Color Not Available)
Part Number: MK-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Kendo M Warm Dim
Part Number: KM-(length)-LLWD51HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Kendo M RGB
Part Number: KM-(length)-RGB42SO-CLR-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-DMX-D-96-24



Kendo M Wet (Exterior)
Part Number: KMW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)



Kendo M Channel: KMC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request



Myka Channel (Dynamic Color Not Available)
MKC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request



Static White: LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24



Warm Dim: LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL CONT.

(For Field Assembly)



Color Changing: LLRGB42-SO-(start feed)-(end feed)-(length)
Power Supply: PS-DMX-D-96-24



Static White Wet: LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24

RENDER




***Products Shown - Refer to specification sheet for more information

***Myka Lens option - Refer to installation guides for details


RECESSED MUD-IN

DETAIL SECTION


Sleek and Modern
Direct Illumination

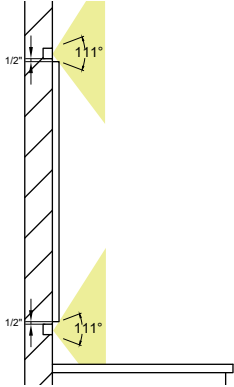

Detail Section: Using Linnii Frosted Lens
Refer to specification sheet for additional lens options



LINII



MYKA R TRIMLESS



RECOMMENDED LUMINAIRES



Linnii Static White
Part Number: LIN-(length)-(output)-(cct)-(lens)-(mounting)-
(left end cap)-(right end cap)-(power supply type)
Power Supply: PS-UNI-96-24



Linnii (CORNERS) Static White
Part Number: LIN-(corner type)-(angle)-(output)-(cct)-(lens)-
(mounting)-(left end cap)-(right end cap)-(power supply
type)
Power Supply: PS-UNI-96-24



Linnii Warm Dim
Part Number: LIN-(length)-LLWD51HO-18K-27K-(lens)-
(mounting)-(left end cap)-(right end cap)-(power supply
type)
Power Supply: PS-UNI-96-24



Linnii RGB
Part Number: LIN-(length)-RGB42SO-CLR-(lens)-(mounting)-
(left end cap)-(right end cap)-(power supply type)
Power Supply: PS-DMX-D-96-24




Linnii (CORNERS) Warm Dim
Part Number: LIN-(corner type)-(angle)-LLWD51HO-18K-27K-
(lens)-GDS-(left end cap)-(right end cap)-(power supply type)
Power Supply: PS-UNI-96-24



Linnii (CORNERS) RGB
Part Number: LIN-(corner type)-(angle)-RGB42SO-CLR-
(lens)-GDS-(left end cap)-(right end cap)-(power supply type)
Power Supply: PS-DMX-D-96-24

RENDER

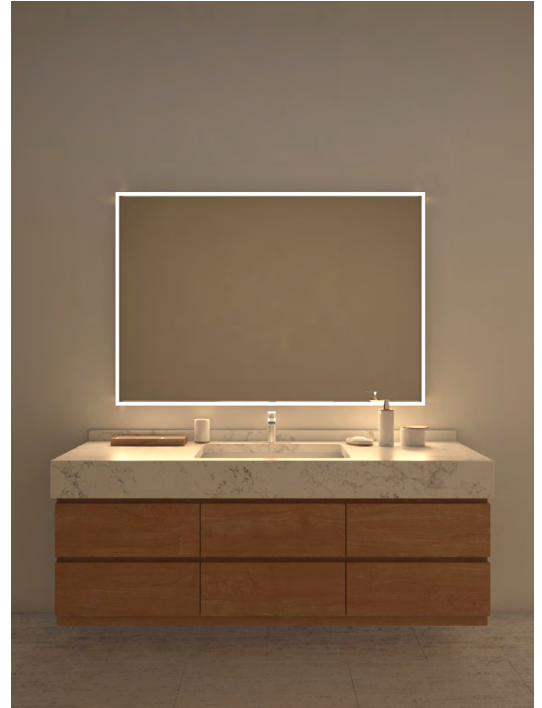

TAPE & CHANNEL (For Field Assembly)



Linnii Channel: LINC-(length)-(lens)-(mounting)-MILL



Myka Recessed Trimless Channel (Dynamic Color Not Available)
MKLC-(length)-(lens)-MF-MILL



Static White: LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24



Warm Dim: LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24



Color Changing: LLRGB42-SO-(start feed)-(end feed)-(length)
Power Supply: PS-DMX-D-96-24

MYKA LENS OPTION


LOUVER:

Black Blade Louver: LV-BL-MKC-12-BK

White Blade Louver: LV-BL-MKC-12-WH


LV-BL-MKC-12-BK

Blade Louver reduces glare at high angle in two directions
Also available with complete fixture, use ordering code
-BLV



LV-BL-MKC-12-WH


Blade Louver reduces glare at high angle in two directions
Also available with complete fixture, use ordering code
-WLW



MYKA RECESSED TRIMLESS CORNER DETAILS

MKLC-FC-90-(lens)-MF-MILL

Flat Corner

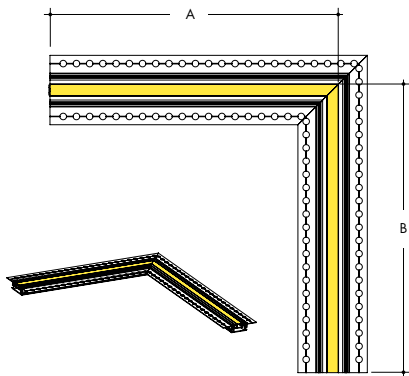


***Custom Corner angles are available upon request

***Mounting screws are included with channel. Refer to specifications sheet for provided mounting screw quantities.

***Products Shown - Refer to specification sheet for more information

***Myka Lens option - Refer to installation guides for details

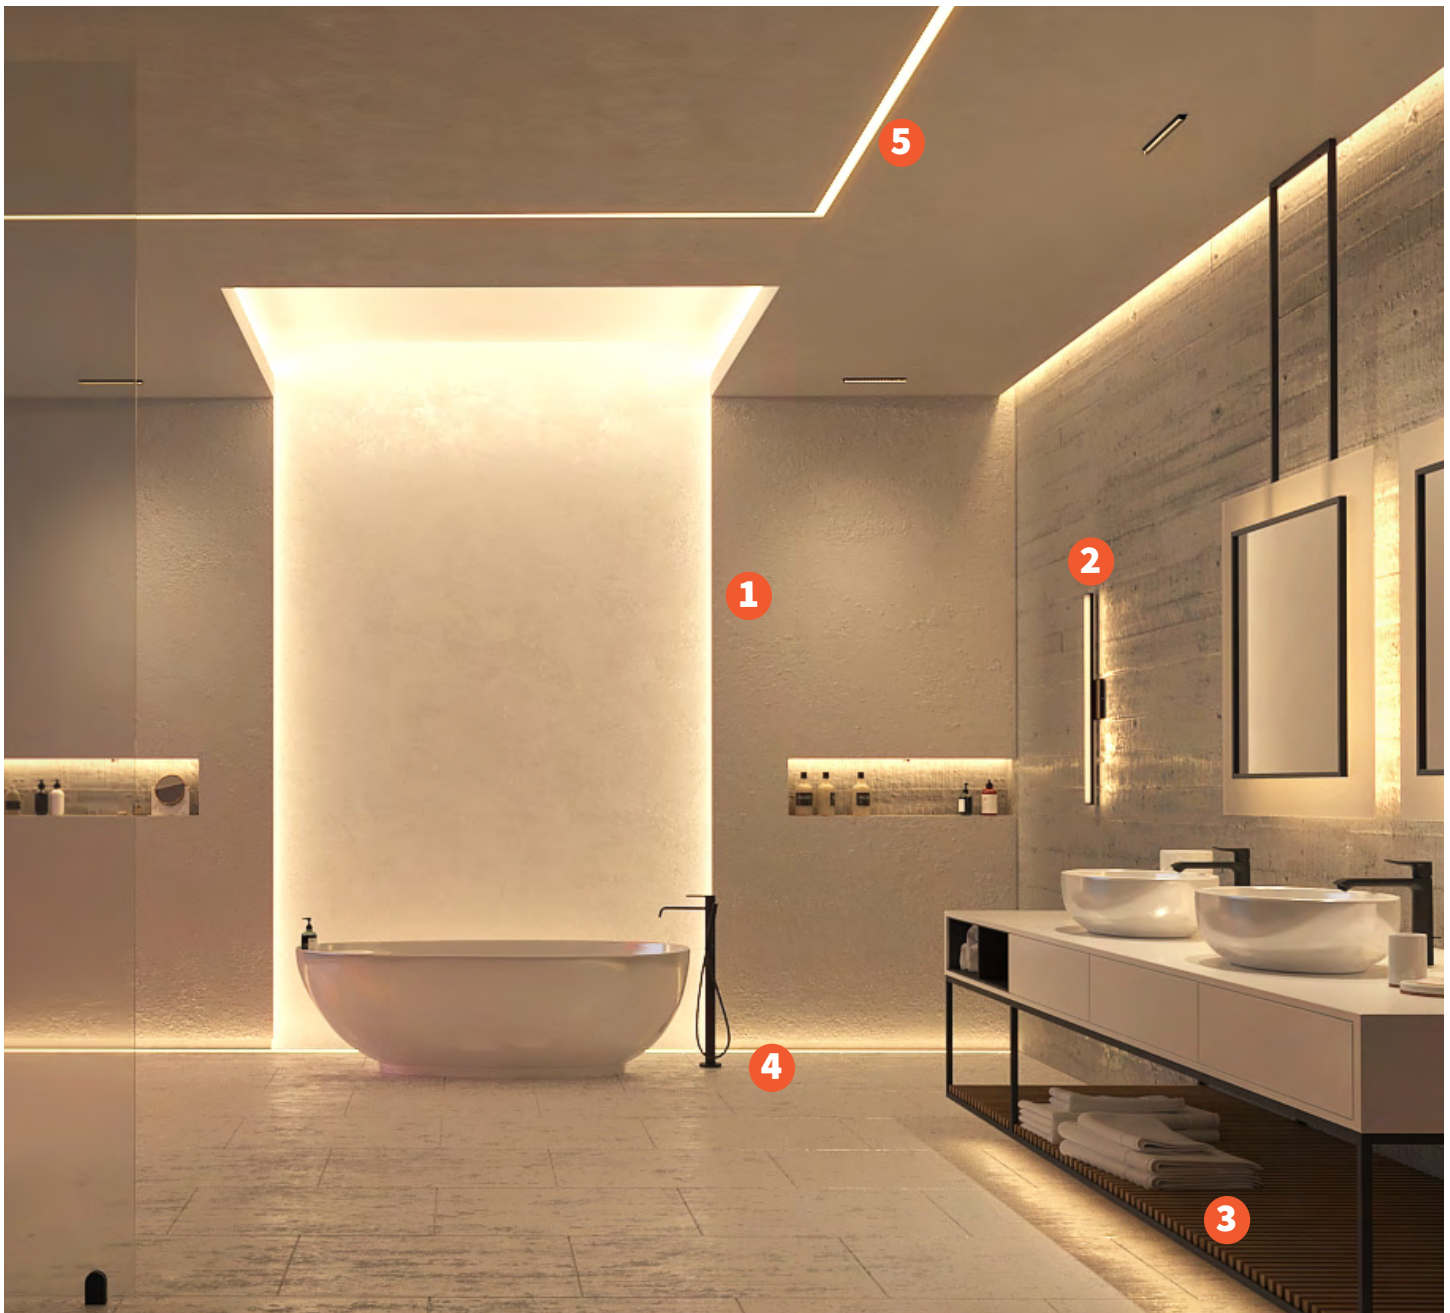

TOE-KICKS

Toe-kick lighting brings a refined, contemporary feel to residential spaces while offering functional low-level illumination. For a bold, bright look, direct toe-kicks deliver clean lines of light. Prefer a softer approach? Indirect toe-kicks minimize glare on glossy bathroom floors and enhance millwork details. For outdoor applications, grazing toe-kicks offer dramatic, far-reaching light—perfect for water features or hardscapes without overpowering the night landscape. We recommend Luminii's Kendo S Surface in damp or wet-rated versions, including a graze lens for added effect.

PRODUCTS USED:

- 1) Luminii **Kendo M Wet**
- 2) Luminii **Clareo Wall**
- 3) Luminii **Kendo M**
- 4) Senso **Trident**
- 5) Luminii **Linii**

DOCUMENT NOTES:

- 1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
- 2) Additional lumen packages are available. Refer to specification sheets.
- 3) Silver, Black, White, Bronze finishes are standard; Premium finishes available, contact factory for more information.

- Title 24 / JA8 / Declare
- Dot Free w/ Frosted Lens
- 7-Year Warranty
- 24 VDC Class 2
- 98+ CRI

Declare:       

***Refer to spec sheets for specific product listings


Finish Options

Base	☐ Silver Anodized
Powder Coat	☐ Black ☐ Bronze ☐ White
Premium	☐ Matte Black ☐ Warm Nickel ☐ Aged Brass ☐ Polished Gold ☐ Chrome

DIRECT


DETAIL SECTION

Bright and Direct. Traditional accent to provide low-level illumination.

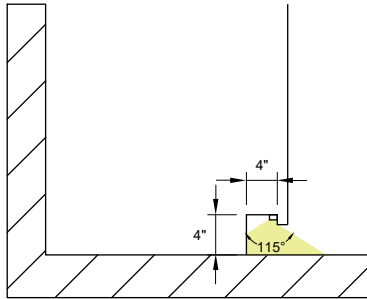

Detail Section: Using Kendo S Frosted Lens
Refer to specification sheet for additional lens options

RENDER

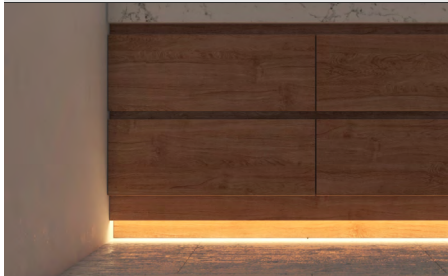


RECOMMENDED LUMINAIRES

- Kendo S Static White**
Part Number: KS-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-LLWD51HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24

INDIRECT

DETAIL SECTION

Soft and Indirect. Best for glossy floors to avoid unwanted reflection.

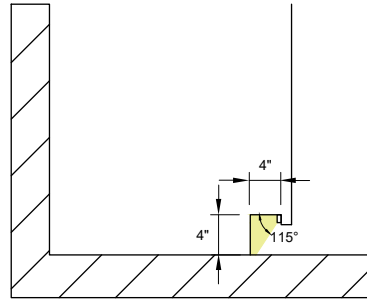

Detail Section: Using Kendo S Frosted Lens
Refer to specification sheet for additional lens options

RENDER




RECOMMENDED LUMINAIRES

- Kendo S Static White**
Part Number: KS-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-LLWD51HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24

WASH


DETAIL SECTION

Dynamic and direct. For a modern and dramatic look.

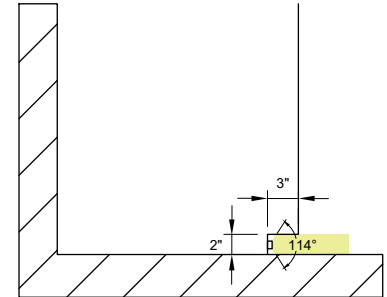

Detail Section: Using Kendo S Frosted Lens
Refer to specification sheet for additional lens options

RENDER

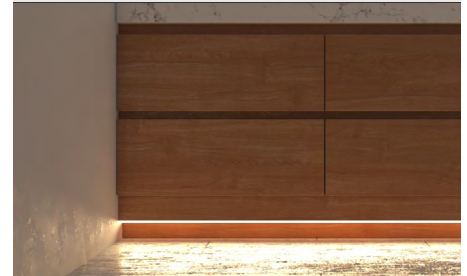

RECOMMENDED LUMINAIRES

- Kendo S Static White**
Part Number: KS-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Warm Dim**
Part Number: KS-(length)-LLWD51HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24
- Kendo S Wet (Exterior)**
Part Number: KSW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)


- Kendo S Channel:** KSC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
***Must use Kendo M with SL65 Connectors

TAPE & CHANNEL (For Field Assembly)

- Kendo S Channel:** KSC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
***Must use Kendo M with SL65 Connectors

TAPE & CHANNEL (For Field Assembly)

- Kendo S Channel:** KSC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request
- Static White:** LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Warm Dim:** LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
- Static White Wet:** LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
***Must use Kendo M with SL65 Connectors



***Products Shown - Refer to specification sheet for more information



SHOWER + BATH ACCENTS

Design spa-like bathrooms your clients will love with modern recessed linear lighting that enhances self-care routines and complements vanity lighting. Skip traditional downlights for a clean, contemporary look using recessed mud-in solutions. For built-in wall shelves or vertical wall pockets with accent lighting, we recommend Luminii's wet-rated Optic Arts Kurba for curved applications, or the wet-rated Kendo M and Myka Surface linear fixtures for straight lines. In recessed mud-in installations, Luminii's static or dynamic white Linii trimless solution delivers a sleek, modern finish perfect for ceilings, vertical walls, or wall-to-ceiling transitions. To accent natural stone or brick in bath areas, Senso by Luminii's IP & IK-rated Trident ingrade linear lighting offers durable, elegant illumination.


PRODUCTS USED:

- 1) Luminii Kendo M Wet
- 2) Luminii Kendo S Wet
- 3) Stenos Downlight 12"

DOCUMENT NOTES:

1) 24K, 27K, 30K, 35K color temperatures recommended for High End Residential.
2) Additional lumen packages are available. Refer to specification sheets.
3) Silver, Black, White, Bronze finishes are standard; Premium finishes available, contact factory for more information.

- Title 24 / JA8 / Declare
- Dot Free w/ Frosted Lens
- 7-Year Warranty
- 24 VDC Class 2
- 98+ CRI



***Refer to spec sheets for specific product listings


Finish Options

Base	☐ Silver Anodized
Powder Coat	☐ Black ☐ Bronze ☐ White
Premium	☐ Matte Black ☐ Warm Nickel ☐ Aged Brass ☐ Polished Gold ☐ Chrome


WET LOCATION WALL SHELF

DETAIL SECTION


Consider adding a built-in wall shelf with accent lighting. Luminii has wet location LEDs for any application.



Detail Section: Using Kendo M Frosted Lens
Refer to specification sheet for additional lens options



KENDO M WET



MYKA WET

RECOMMENDED LUMINAIRES



Kurba Large Static White
Part Number: KBL-W-VB-(length)-(output)-(cct)-(SF)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24



Kendo M Warm Dim
Part Number: KM-(length)-LLWD51HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Kurba Large Warm Dim
Part Number: KBL-W-VB-WD59SO-18K30K-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24



Kurba Large RGBW
Part Number: KBL-W-VB-RGBW26SO-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-DMX-D-96-24



Kendo M Wet (Exterior)
Part Number: KMW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Option: Myka Wet (Dynamic Color Not Available)
Part Number: MKW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)



Kendo M Channel: KMC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request




Myka Channel (Dynamic Color Not Available)
MKC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request



Static White: LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24

RENDER

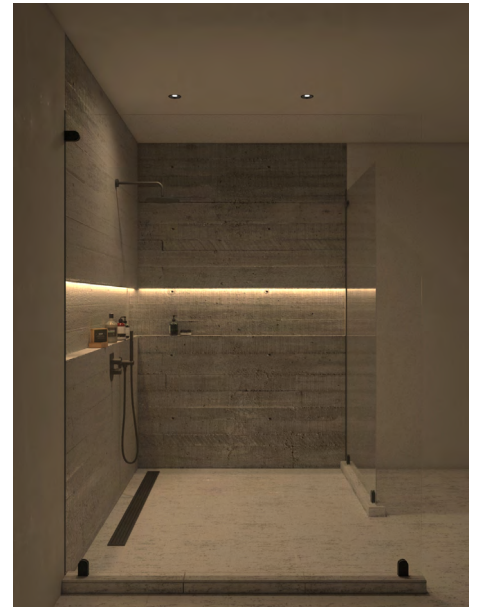

Note: Wet is recommended for shower applications.

TAPE & CHANNEL CONT. (For Field Assembly)



Warm Dim: LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24




Static White Wet: LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24


WET LOCATION WALL POCKET WITH SHELVES

DETAIL SECTION


Consider adding a built-in wall pocket accent lighting. Luminii has wet location LEDs for any application.

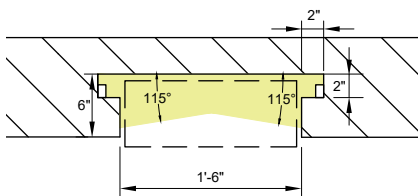

Detail Section: Using Kendo M Frosted Lens
Refer to specification sheet for additional lens options



KENDO M WET



MYKA WET

RECOMMENDED LUMINAIRES



Kurba Large Static White
Part Number: KBL-W-VB-(length)-(output)-(cct)-(SF)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24



Kendo M Warm Dim
Part Number: KM-(length)-LLWD51HO-18K-27K-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Kurba Large Warm Dim
Part Number: KBL-W-VB-WD59SO-18K30K-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24



Kurba Large RGBW
Part Number: KBL-W-VB-RGBW26SO-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-DMX-D-96-24



Kendo M Wet (Exterior)
Part Number: KMW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)-(accessories)
Power Supply: PS-UNI-96-24



Option: Myka Wet (Dynamic Color Not Available)
Part Number: MKW-(length)-(output)-(cct)-(lens)-(mounting)-(finish)-(start feed)-(end feed)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)



Kendo M Channel: KMC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request




Myka Channel (Dynamic Color Not Available)
MKC-(length)-(lens)-(mounting)-(finish)
***Premium finishes available on request



Static White: LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24

RENDER

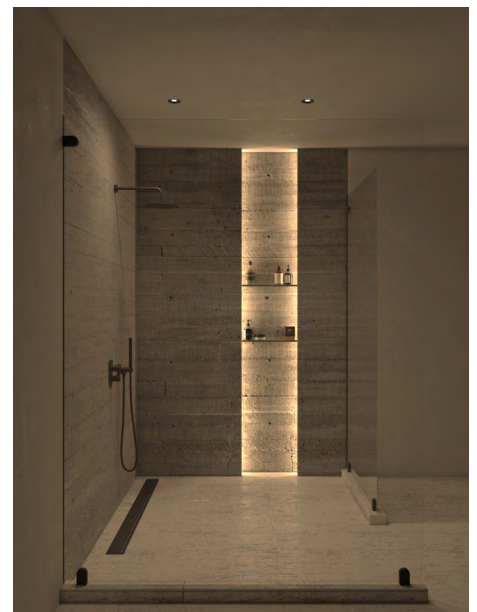

Note: Wet is recommended for shower applications.

TAPE & CHANNEL CONT. (For Field Assembly)



Warm Dim: LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24




Static White Wet: LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24


RECESSED LINEAR MUD-IN (SHOWER)

DETAIL SECTION


Eliminate downlights with linear general illumination for a sleek modern look.
Wall, Ceiling and Corners available.



Detail Section: Using Linii Frosted Lens
Refer to specification sheet for additional lens options



LINII



MYKA R TRIMLESS



RECOMMENDED LUMINAIRES



Linii Static White
Part Number: LIN-(length)-(output)-(cct)-(lens)-(mounting)-(left endcap)-(right end cap)-(power supply type)
Power Supply: PS-UNI-96-24



Linii (CORNERS) Static White
Part Number: LIN-(corner type)-(angle)-(output)-(cct)-(lens)-(mounting)-(left end cap)-(right end cap)-(power supply type)
Power Supply: Refer to Spec Sheet



Linii Warm Dim
Part Number: LIN-(length)-LLWD51HO-18K-27K-(lens)-(mounting)-(left end cap)-(right end cap)-(power supply type)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)



Linii Channel: LINC-(length)-(lens)-(mounting)-MILL



Myka Recessed Trimless Channel (Dynamic Color Not Available)
MKLC-(length)-(lens)-MF-MILL



Static White: LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24




Warm Dim: LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24



Static White Wet: LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24

RENDER

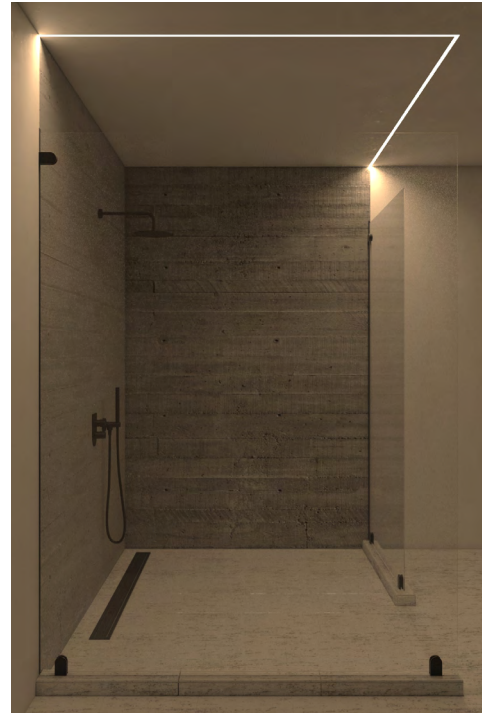


Note: Wet is recommended for shower applications.


RECESSED LINEAR MUD-IN (BATH)

DETAIL SECTION

Eliminate downlights with linear general illumination for a sleek modern look.
Wall, Ceiling and Corners available.

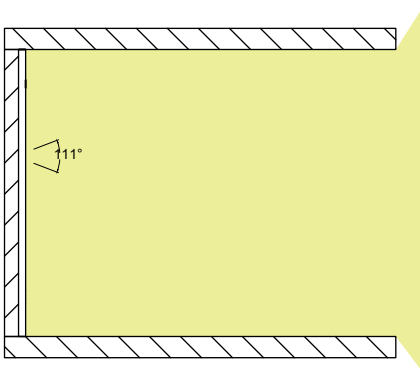

Detail Section: Using Linii Frosted Lens
Refer to specification sheet for additional lens options



MYKA R TRIMLESS



RECOMMENDED LUMINAIRES



Linii Static White
Part Number: LIN-(length)-(output)-(cct)-(lens)-(mounting)-(left endcap)-(right end cap)-(power supply type)
Power Supply: PS-UNI-96-24



Linii (CORNERS) Static White
Part Number: LIN-(corner type)-(angle)-(output)-(cct)-(lens)-(mounting)-(left end cap)-(right end cap)-(power supply type)
Power Supply: Refer to Spec Sheet



Linii Warm Dim
Part Number: LIN-(length)-LLWD51HO-18K-27K-(lens)-(mounting)-(left end cap)-(right end cap)-(power supply type)
Power Supply: PS-UNI-96-24

TAPE & CHANNEL (For Field Assembly)



Linii Channel: LINC-(length)-(lens)-(mounting)-MILL



Myka Recessed Trimless Channel (Dynamic Color Not Available)
MKLC-(length)-(lens)-MF-MILL




Static White: LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24



Warm Dim: LLWD51-HO-18K-27K-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24



Static White Wet: LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24



LINII



RENDER



Note: Wet is recommended for shower applications.


***Products Shown - Refer to specification sheet for more information

***Myka Lens option - Refer to installation guides for details


INGRADE LINEAR

DETAIL SECTION

Modern accent perfect for highlighting natural brick or stone finishes. Supplementary downlighting recommended. Pairs with Stenos or Rain downlights.

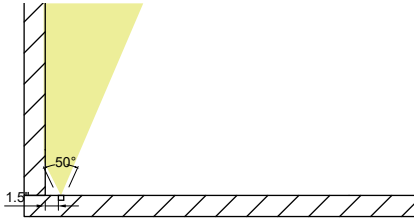

Detail Section: Using Trident Frosted Lens
Refer to specification sheet for additional lens options



TRIDENT




RECOMMENDED LUMINAIRES



TRIDENT
Part Number: 455-(model)-(resin)-(output)-(cct)-(finish)-(feed)-(length)
Power Supply: PS-UNI-96-24

RENDER

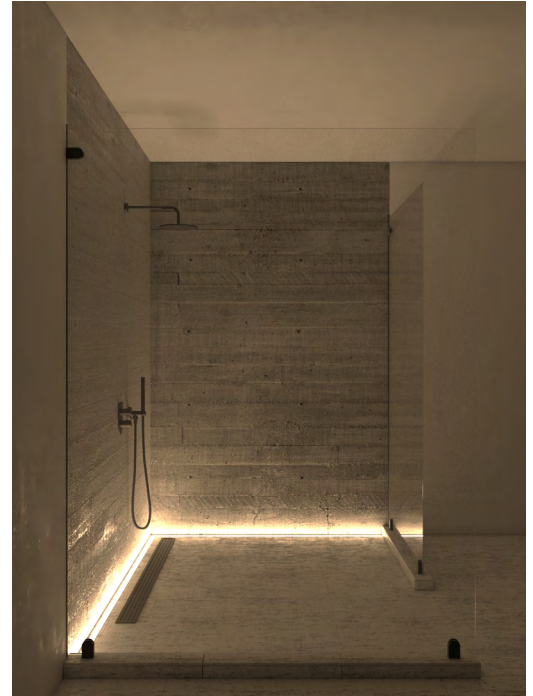


Note: Wet is recommended for shower applications.

WALL TO CEILING RECESSED

DETAIL SECTION

Modern accent perfect for accent natural brick or stone finishes. Supplementary downlighting recommended.

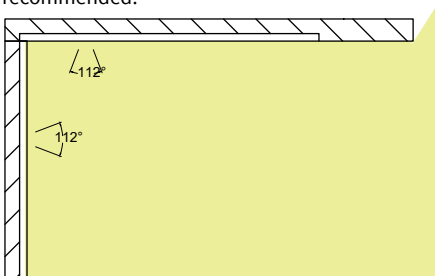

Detail Section: Using Myka R Trimless Frosted Lens
Refer to specification sheet for additional lens options

TAPE & CHANNEL (For Field Assembly)




Myka Recessed Trimless Channel (Dynamic Color Not Available)
MKLC-(length)-(lens)-MF-MILL



Static White: LLVC72-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24



Static White Wet: LLVC72WET-WHT-LO-(cct)-(start feed)-(end feed)-(length)
Power Supply: PS-UNI-96-24
***Must use Kendo M with SL65 Connectors



MYKA R TRIMLESS



RENDER




Note: Wet is recommended for shower applications.

MYKA RECESSED TRIMLESS CORNER DETAILS


MKLC-FC-90-(lens)-MF-MILL

Flat Corner




MKLC-IC-90-(lens)-MF-MILL

Inside Corner



MKLC-OC-90-(lens)-MF-MILL

Outside Corner



***Custom Corner angles are available upon request

***Mounting screws are included with channel. Refer to specifications sheet for provided mounting screw quantities.

MYKA LENS OPTION

LOUVER:

Black Blade Louver: LV-BL-MKC-12-BK

White Blade Louver: LV-BL-MKC-12-WH

***Products Shown - Refer to specification sheet for more information

***Myka Lens option - Refer to installation guides for details

**SAUNA**

Sauna lighting should be soft, warm, and calming—using direct illumination that complements the tranquil environment without harsh brightness. Safety is paramount in high-heat, high-humidity spaces, so choosing the right fixtures is essential. Luminii offers a discreet, minimalist aesthetic for these settings. For ceiling installations, we recommend the wet-rated Senso by Luminii Rain display light, while the Optic Arts by Luminii Kurba sauna-rated bendable strip light provides ideal indirect accent lighting designed specifically for sauna environments.


PRODUCTS USED:

- 1) Luminii **Kurba**
- 2) Senso **Rain**


CEILING APPLICATION

DETAIL SECTION

Provides a discreet, minimalistic aesthetic where direct illumination is required.

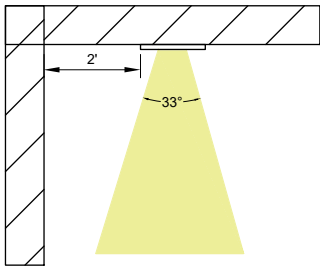


Detail Section: Using 33° Beam Angle
Refer to specification sheet for additional lens options

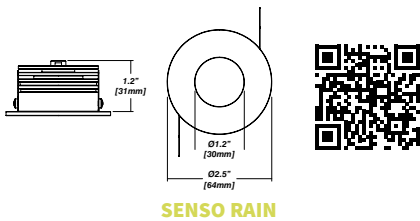

RECOMMENDED LUMINAIRES

- Senso Rain 2700K Static White**
Part Number: 520-612-27-BA
Power Supply: 902-35010
- Senso Rain 3000K Static White**
Part Number: 520-612-30-BA
Power Supply: 902-35025

RENDER

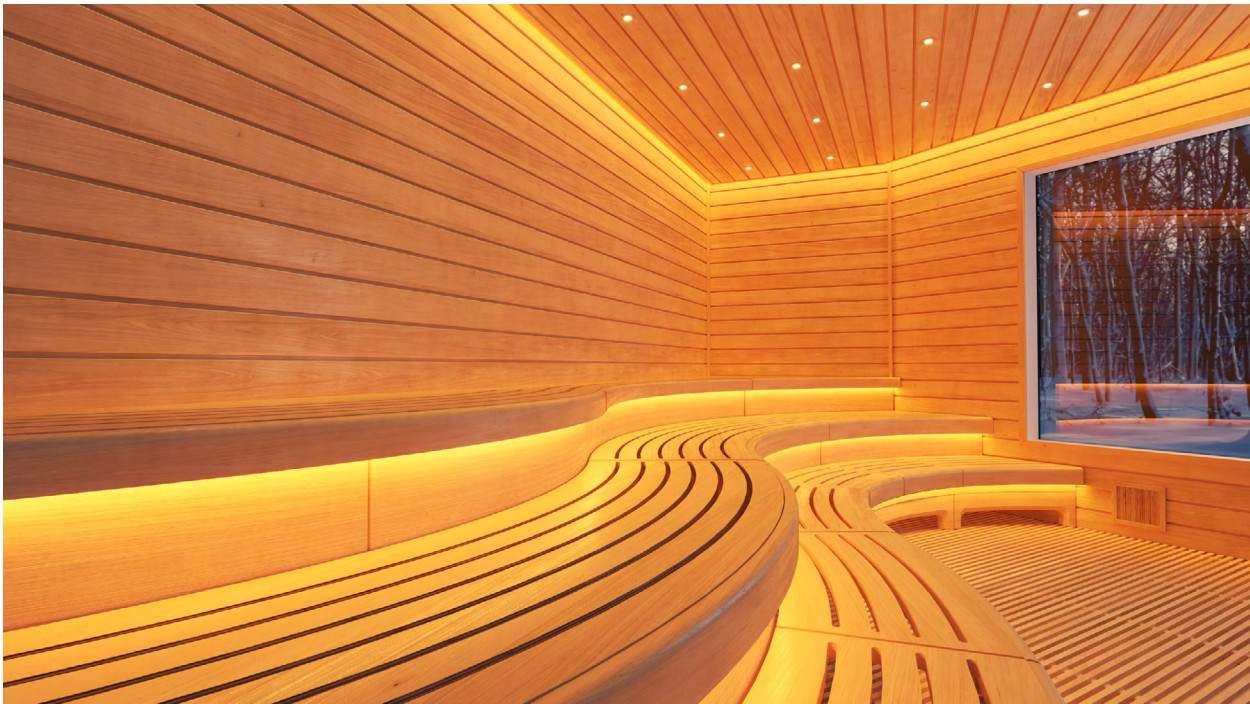


Note: Wet is recommended for shower applications.

***Products Shown - Refer to specification sheet for more information


INDIRECT ACCENT

DETAIL SECTION

Kurba Sauna



Detail Section: Using Horizontal Bend Silicone Frosted Lens - 113°
Refer to specification sheet for additional lens options



KURBA LARGE SAUNA




RECOMMENDED LUMINAIRES

- Kurba Large Sauna Static White**
KBL-SN-(bend)-(length)-33LO-(cct)-SF-NA-WH-(start feed)-(end feed)
- Power Supply: PS-UNI-96-24

CHANNEL (For Field Assembly)

- Kurba Large Channel: MC-KBL-SAP-SM-78-SA**


RENDER

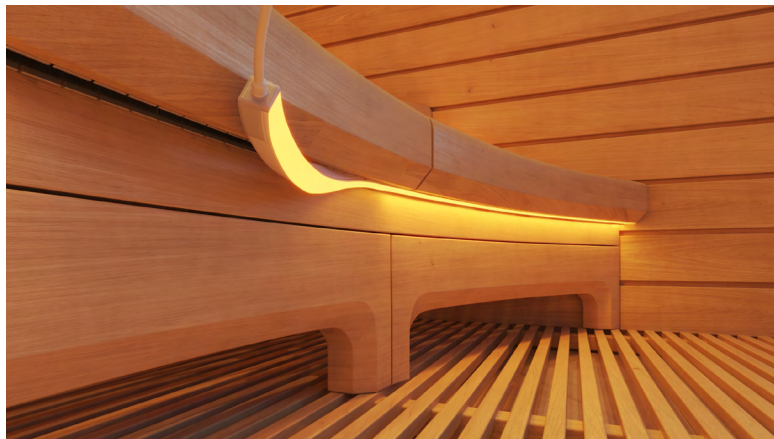

MOUNTING ACCESSORIES


MC-KBL-BANP-3D-SM-39-XX

KBL Mounting Channel, Bendable Silicone Profile,
3D Bending, Surface Mount, 39°, 6" bending radius




MC-KBL-SAP-SM-78-SA

KBL Mounting Channel, Serrated Aluminum
Profile, Surface Mount, 78in, Silver Anodized




MC-KBL-SAP-SM-0.8-SA

KBL Mounting Channel, Serrated Aluminum
Profile, Surface Mount, 0.8in, Silver Anodized




INSTALLATION

KBL Mounting Channel, Bendable Anole Profile

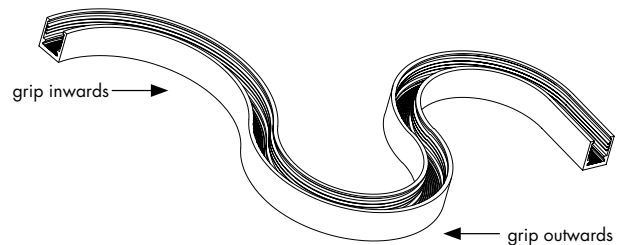


MC-KBL-FSAP-TR-78-SA

KBL Mounting Channel, Flanged Serrated Aluminum
Profile, Trimmed Recessed Mount, 78in, Silver
Anodized



MC-KBL-RCWY-SM-78-SA

KBL Mounting Channel, Raceway, Surface Mount,
78in, Silver Anodized

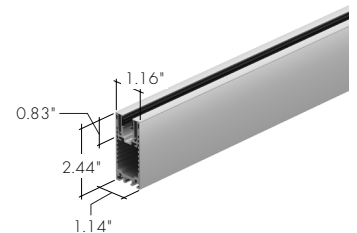

***Products Shown - Refer to specification sheet for more information

Declare

CE

RoHS

UL LISTED

DIM

IP67

IP67



Luminii part numbers and specifications are subject to change at any time.

Please refer to specification sheets on Luminii.com for the most up to date information or contact your local sales representative for more details.

Luminii Design Guides are intended to provide inspiration; please consult with your design professional, contractor, or electrician prior to purchase.

[Have additional questions? Luminii is here to help.](#)

Contact us anytime and we will help guide you to find the perfect products for any application.