

MINIMO PRO HE

PRODUCT OVERVIEW

HIGH EFFICIENCY LIGHT ENGINE




OVERVIEW

Minimo Pro HE is a Constant Current single source pro-series downlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white and black along with a range of premium finishes. It has four site-changeable optics for flexible beam distribution and is fully adjustable with 360° pan and 35° tilt without breaking the ceiling line. Our 1209lm | 10.80W light engine has a max peak intensity of 9156cd. The integral accessory holder can accommodate 32mm lenses and louvers.

KEY FEATURES

- Beam Options: 17 | 25 | 35 | 40
- Performance: 1209lm | 10.80W
- Movement: 360 Pan | 35 Tilt
- Tool-less field changeable optics
- High CRI
- Trimmed / Trimless options
- Part L1 / L2 (General & Display) Compliant




PERFORMANCE

	High Efficiency			
	Narrow	Medium	Wide	V. Wide
FWHM	17°	25°	35°	40°
Luminous Flux	1130 lm	1209 lm	1125 lm	1094 lm
Peak Intensity	9156 cd	6136 cd	3011 cd	2261 cd
CCT	2700K 3000K			
CRI Min.	90 90			
LED Current	0.600 A			
Voltage	18 V			
Input Wattage	10.8 W			
Efficacy	111.9 lm/W			
Driver Type	Constant Current Remote			
Class	SELV Class III			

ORDER CODE

Model	Type	Rating	Trim	Aperture	Output	CCT	Beam Angle	Trim Finish	Aperture Finish
MNP Minimo Pro	D Fixed	20 IP20	TR Trimmed	FP Pinhole ³	HE High Efficiency	27K 2700K	NR Narrow 17°	NA Trimless	WH White
	A Adjustable	54 IP54	TL Trimless ¹	BV Beveled ²		30K 3000K	ME Medium 25°	WH White	BK Black
							WD Wide 35°	BK Black	MG Matt Gold
							VW Very Wide 40°	AL Br. Aluminium	
								RBZ R. Bronze	
								BR Br. Brass	
								PB P. Brass	
								CH Chrome	

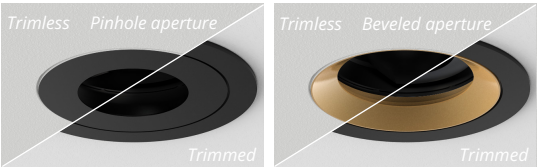

Example code: MNP-D-20-TL-BV-HE-27K-NR-NA-WH

¹ Trimless trim finish must be NA ² MG Aperture finish only for beveled ³ Pinhole trim finishes only WH/BK/NA

See Drivers, Power Supplies and Accessories sections for further order codes

LIGHT ENGINE SELECTION

This product specification sheet references our HE light engine, this product is also available with Intense and Plus static white light engines, please refer to their separate sheets.

▸ intense ▸

Precision's signature intense light engines offer tight, surgical beams combined with the highest peak intensity values available.

- Ultra-tight beams
- High Peak Cd

plus⁺

Precision's plus light engines offer the best balance between delivered lumens, beam quality and outstanding colour rendition.

- Increased Lumen Output
- CRI 98 Typical

HE

Precision's high efficiency light engines deliver the highest possible lumen values as well as our outstanding energy efficiency

- Maximum Lumen Output
- Maximum Energy Efficiency

LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	13.09 Kg/CO2e
CIBSE TM66	2.2
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	LBC Red List Approved
Lifetime	L90B10 50,000hrs
Warranty	5 Years

UK PART L	
Part L1A / L1B (Dwellings)	Compliant 154 lm/W Source lm (1663 lm) / Source W (10.80 W)
Part L2A (General)	Compliant 105lm/W Delivered (1209 lm) / System W* (11.49 W)
Part L2A (Display)	Compliant 154 lm/W Source lm (1663 lm) / Source W (10.80 W)



*System W includes driver losses

MINIMO PRO HE

DIMENSIONS & FINISHES

HIGH EFFICIENCY LIGHT ENGINE

DIMENSIONS

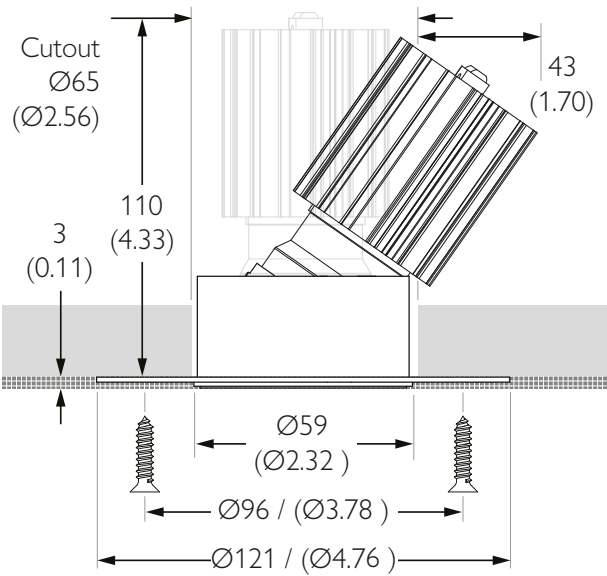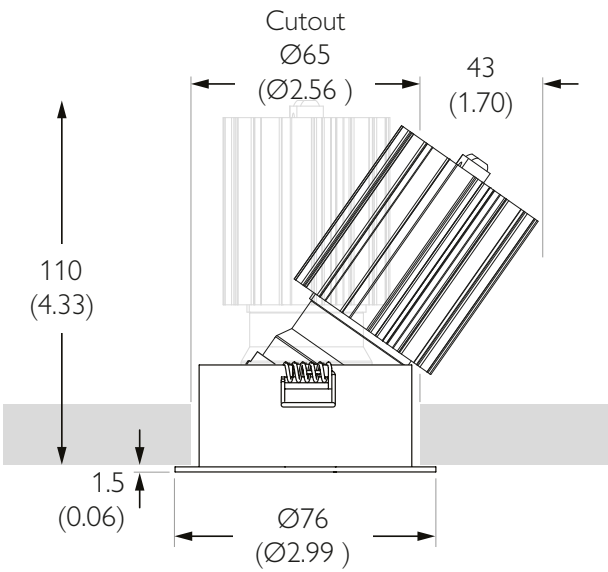

MECHANICAL

Location	IP20 / IP54 Indoor Dry / Damp Location Only
Mounting	Recessed
Adjustability	360 Pan 35 Tilt
Lockable	N/A
Accessories	Louver Lenses

Cutout	$\varnothing 65\text{mm}$ (2.56")
Ceiling Thickness	3-25mm (0.12-0.98")
Product Class	SELV Class III
Material	Machined AL 6063-T6
Weight	249g 0.55lb

MINIMO PRO HE

DIMENSIONS & FINISHES

HIGH EFFICIENCY LIGHT ENGINE

TRIM & APERTURE TYPES



TRIMMED
PINHOLE



TRIMLESS
PINHOLE



TRIMMED
BEVELED




TRIMLESS
BEVELED


TRIM FINISHES




WHITE




BLACK




BRUSHED
ALUMINUM




POLISHED
BRASS



BRUSHED
BRASS



RUBBED
BRONZE




POLISHED
CHROME

APERTURE FINISHES

BEVELED



BLACK



MATTE GOLD



WHITE

PINHOLE



WHITE



BLACK

20W | 0-10V | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 only	mm	160	41	30
Order Code	PSCC-RM-1050X-01A	in	6.3	1.61	1.18

20W | DALI-2 | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 only	mm	160	41	30
Order Code	PSCC-RM-1050X-01D	in	6.3	1.61	1.18

This product specification sheet is for 230V / CE / UKCA regions. For North American projects please refer to our Minimo - North American specification sheets.

MINIMO PRO HE

PHOTOMETRY




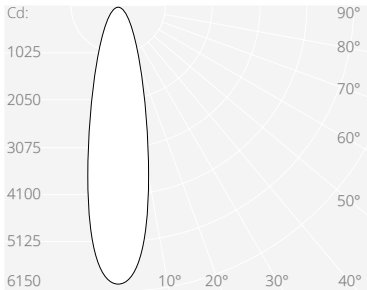

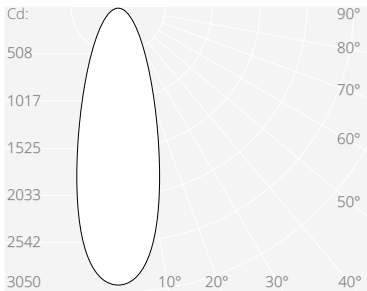

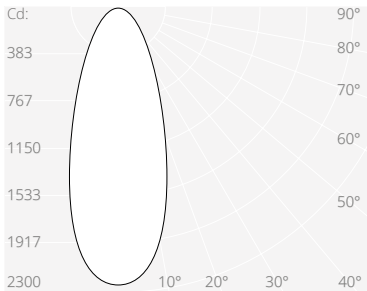
HIGH EFFICIENCY LIGHT ENGINE

OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
2400K	-	-	-	-	-	-
2700K	1.00	90	57	90	101	1209
3000K	1.00	90	57	90	101	1209
3500K	-	-	-	-	-	-
4000K	-	-	-	-	-	-



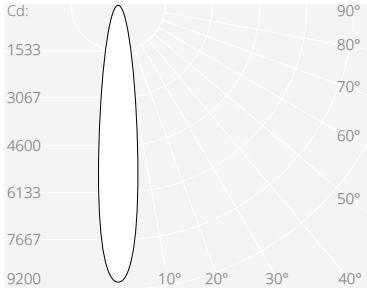

Colour Consistency: 2 SDCM

PHOTOMETRY

NARROW				<table><tr><td>0.30m</td><td>9156lx</td><td>1017fc</td><td>0.9'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>0.60m</td><td>2289lx</td><td>254fc</td><td>1.8'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>0.90m</td><td>1017lx</td><td>113fc</td><td>2.7'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>1.20m</td><td>572lx</td><td>64fc</td><td>3.6'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>1.49m</td><td>366lx</td><td>41fc</td><td>4.5'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>28fc</td><td>5.4'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.30m	9156lx	1017fc	0.9'	1m			3'	0.60m	2289lx	254fc	1.8'	2m			6'	0.90m	1017lx	113fc	2.7'	3m			9'	1.20m	572lx	64fc	3.6'	4m			12'	1.49m	366lx	41fc	4.5'	5m			15'			28fc	5.4'				18'
0.30m	9156lx	1017fc	0.9'																																																	
1m			3'																																																	
0.60m	2289lx	254fc	1.8'																																																	
2m			6'																																																	
0.90m	1017lx	113fc	2.7'																																																	
3m			9'																																																	
1.20m	572lx	64fc	3.6'																																																	
4m			12'																																																	
1.49m	366lx	41fc	4.5'																																																	
5m			15'																																																	
		28fc	5.4'																																																	
			18'																																																	
MEDIUM				<table><tr><td>0.44m</td><td>6136lx</td><td>682fc</td><td>1.3'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>0.89m</td><td>1534lx</td><td>170fc</td><td>2.7'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>1.33m</td><td>682lx</td><td>76fc</td><td>4.0'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>1.77m</td><td>384lx</td><td>43fc</td><td>5.3'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>2.22m</td><td>245lx</td><td>27fc</td><td>6.7'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>19fc</td><td>8.0'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.44m	6136lx	682fc	1.3'	1m			3'	0.89m	1534lx	170fc	2.7'	2m			6'	1.33m	682lx	76fc	4.0'	3m			9'	1.77m	384lx	43fc	5.3'	4m			12'	2.22m	245lx	27fc	6.7'	5m			15'			19fc	8.0'				18'
0.44m	6136lx	682fc	1.3'																																																	
1m			3'																																																	
0.89m	1534lx	170fc	2.7'																																																	
2m			6'																																																	
1.33m	682lx	76fc	4.0'																																																	
3m			9'																																																	
1.77m	384lx	43fc	5.3'																																																	
4m			12'																																																	
2.22m	245lx	27fc	6.7'																																																	
5m			15'																																																	
		19fc	8.0'																																																	
			18'																																																	
WIDE				<table><tr><td>0.63m</td><td>3011lx</td><td>335fc</td><td>1.9'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>1.26m</td><td>753lx</td><td>84fc</td><td>3.8'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>1.89m</td><td>335lx</td><td>37fc</td><td>5.7'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>2.52m</td><td>188lx</td><td>21fc</td><td>7.6'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>3.15m</td><td>120lx</td><td>13fc</td><td>9.5'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>9fc</td><td>11.4'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.63m	3011lx	335fc	1.9'	1m			3'	1.26m	753lx	84fc	3.8'	2m			6'	1.89m	335lx	37fc	5.7'	3m			9'	2.52m	188lx	21fc	7.6'	4m			12'	3.15m	120lx	13fc	9.5'	5m			15'			9fc	11.4'				18'
0.63m	3011lx	335fc	1.9'																																																	
1m			3'																																																	
1.26m	753lx	84fc	3.8'																																																	
2m			6'																																																	
1.89m	335lx	37fc	5.7'																																																	
3m			9'																																																	
2.52m	188lx	21fc	7.6'																																																	
4m			12'																																																	
3.15m	120lx	13fc	9.5'																																																	
5m			15'																																																	
		9fc	11.4'																																																	
			18'																																																	
VERY WIDE				<table><tr><td>0.73m</td><td>2261lx</td><td>251fc</td><td>2.2'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>1.46m</td><td>565lx</td><td>63fc</td><td>4.4'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>2.18m</td><td>251lx</td><td>38fc</td><td>6.6'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>2.91m</td><td>141lx</td><td>16fc</td><td>8.7'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>3.64m</td><td>90lx</td><td>10fc</td><td>10.9'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>7fc</td><td>13.1'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.73m	2261lx	251fc	2.2'	1m			3'	1.46m	565lx	63fc	4.4'	2m			6'	2.18m	251lx	38fc	6.6'	3m			9'	2.91m	141lx	16fc	8.7'	4m			12'	3.64m	90lx	10fc	10.9'	5m			15'			7fc	13.1'				18'
0.73m	2261lx	251fc	2.2'																																																	
1m			3'																																																	
1.46m	565lx	63fc	4.4'																																																	
2m			6'																																																	
2.18m	251lx	38fc	6.6'																																																	
3m			9'																																																	
2.91m	141lx	16fc	8.7'																																																	
4m			12'																																																	
3.64m	90lx	10fc	10.9'																																																	
5m			15'																																																	
		7fc	13.1'																																																	
			18'																																																	



OPTICS

There are 4 interchangeable optics

Optic	Optic	Optic	Optic
			
Narrow TIR Optic Molded ID 15	Medium TIR Optic Molded ID 24	Wide TIR Optic Molded ID 36	Very Wide TIR Optic Molded ID 50
Order Code HKST-35-15-SIL	Order Code HKST-35-24-SIL	Order Code HKST-35-36-SIL	Order Code HKST-35-50-SIL

ACCESSORIES

This product can hold 1 x accessory within the integrated holder. To accommodate additional accessories please contact our sales team. Accessories are pre-installed unless otherwise requested.

Glare Control	Colour Change
	
Honeycomb Louver W32xH3.2mm W1.26xH0.13"	1/4 CTO W32xH1.8mm W1.26xH0.07"
Order Code 995-32-BK	Order Code 997-1/4CTO-32

MINIMO PRO HE

FEATURE MAP

HIGH EFFICIENCY LIGHT ENGINE

