

Myka - Installation Instructions

Models MK-XX

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SURFACE MOUNT ONLY
6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
7. INHERENTLY PROTECTED
8. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.




REVO.5
10022024


1 / 8




7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

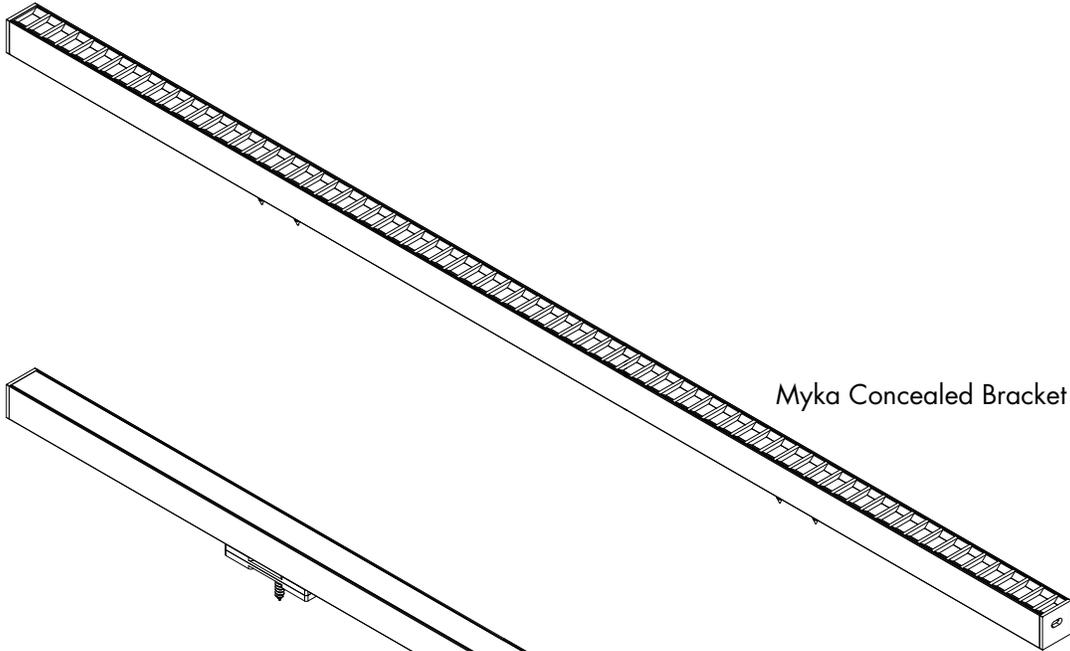

Myka Concealed Bracket Mounting

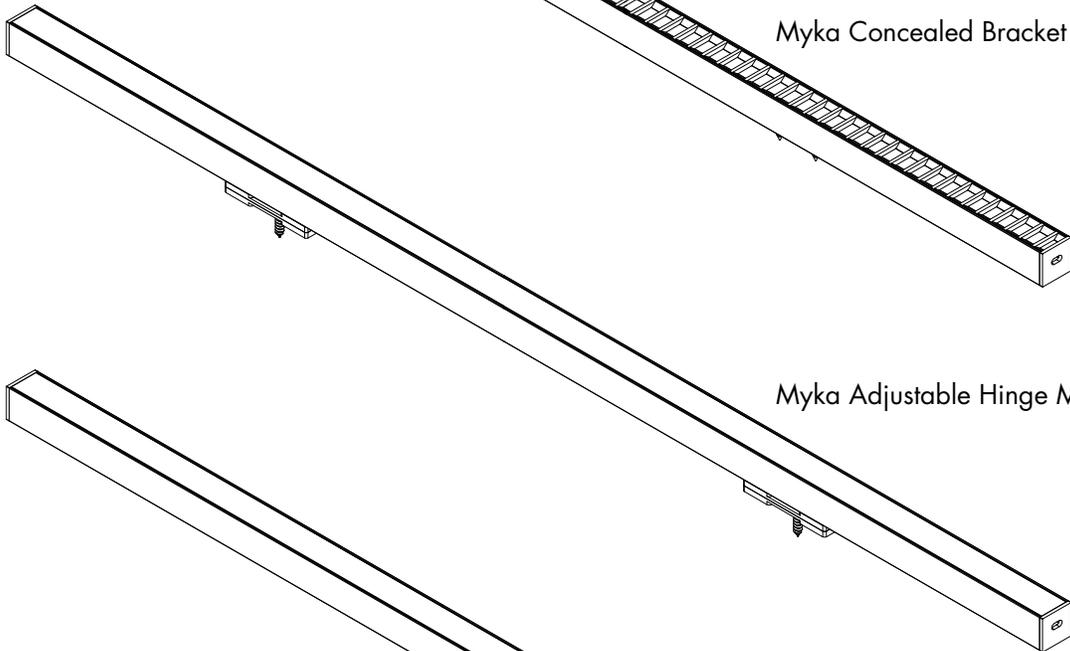

Myka Adjustable Hinge Mounting

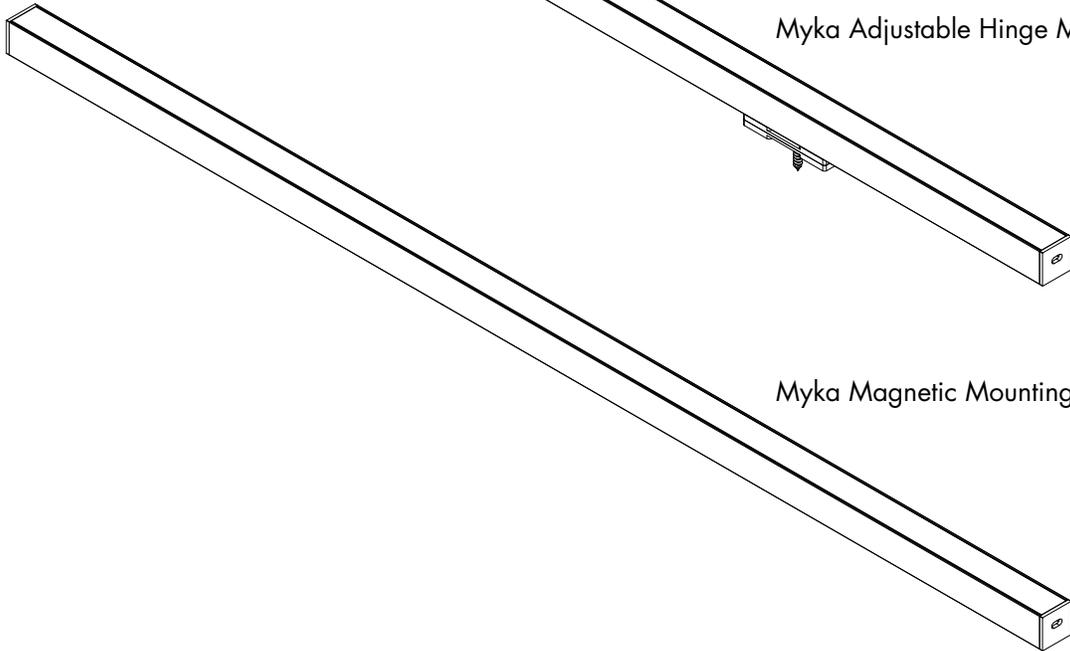

Myka Magnetic Mounting

Myka - Installation Instructions

Models MK-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SURFACE MOUNT ONLY
6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
7. INHERENTLY PROTECTED
8. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

REVO.5
10022024

2 / 8


Magnetic Installation

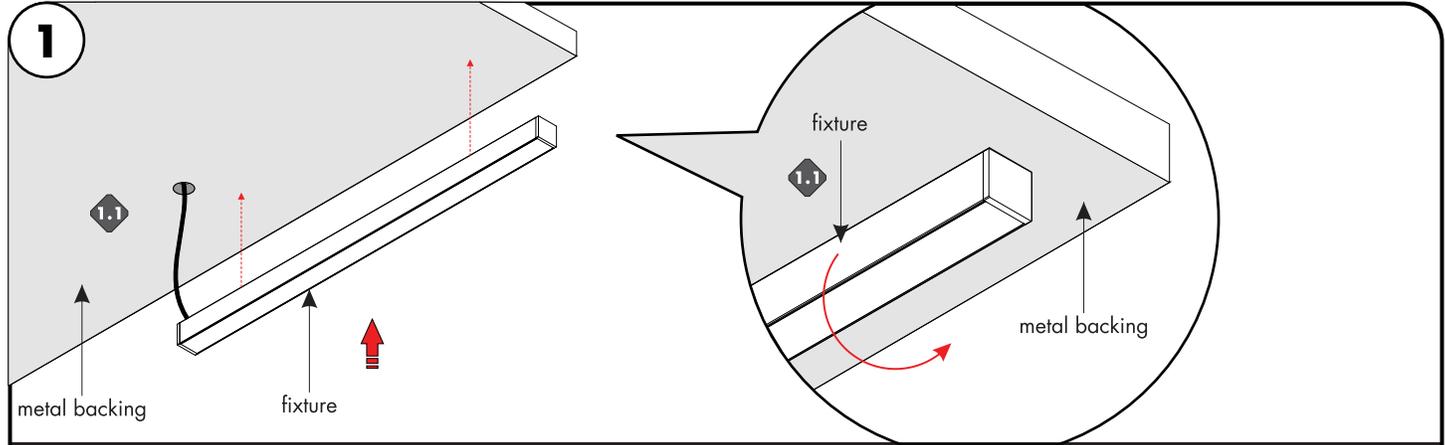

Note: : Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instruction for additional information.

Note: More than one person is recommended for this installation.

- 1.1** Determine the location of the fixture. Must be made of steel or a ferrous metal. Clean the surface area thoroughly from any debris. Snap the fixture onto the metal surface. If necessary fixture can easily be removed by rotating off the surface and repositioning correctly.

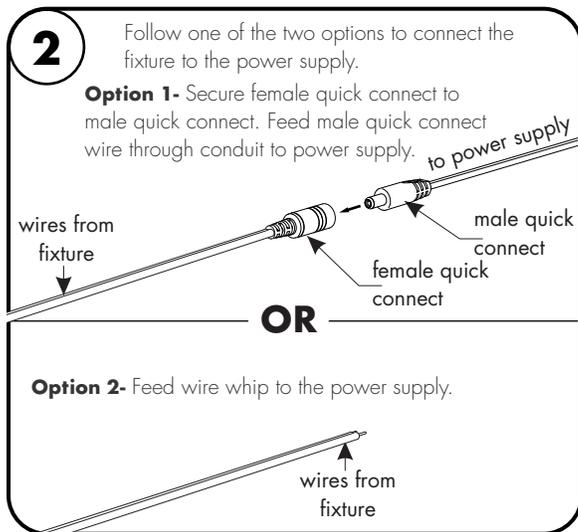

Myka - Installation Instructions

Models MK-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com



REV.0.5
10022024



3 / 8



Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SURFACE MOUNT ONLY.
6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
7. INHERENTLY PROTECTED
8. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

Concealed Bracket Installation

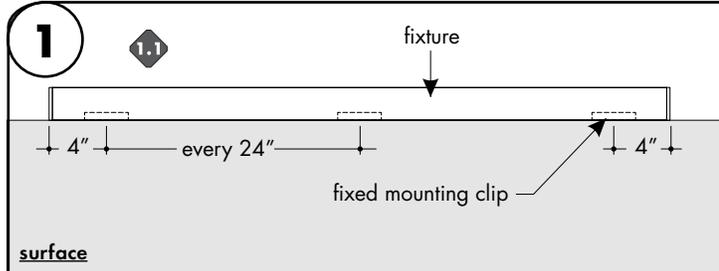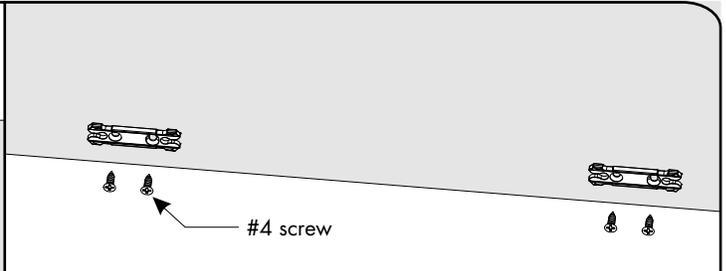 <p>1 1.1 Determine the location of where the fixture(s) will be installed. Lay the fixture(s) on the surface, and make any necessary reference marks for the concealed mounting brackets. Make marks 4" from each end of the fixture(s) and also every 24" in between.</p>	 <p>1.2 Lay the concealed bracket onto the reference mark points and secure using the provided hardware.</p>
---	---

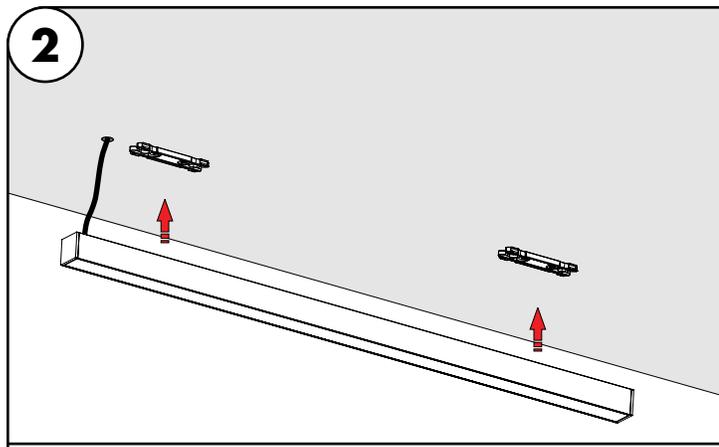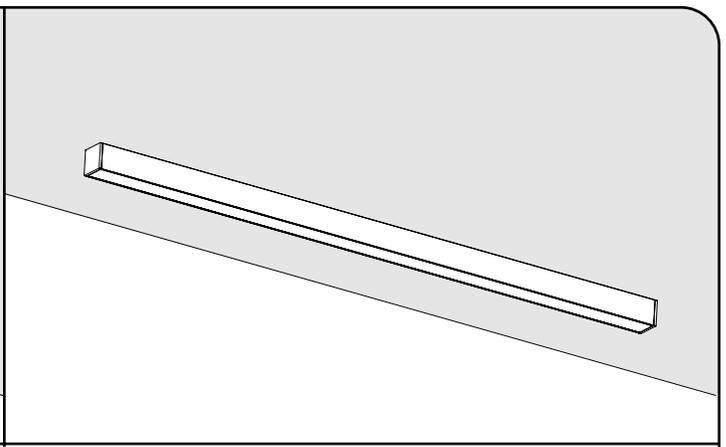 <p>2 2.1 If necessary make any pass through holes for wire lead/connector to the surface, depending on the power feed option. Then snap the fixture into the concealed bracket to secure in place.</p>	
--	---
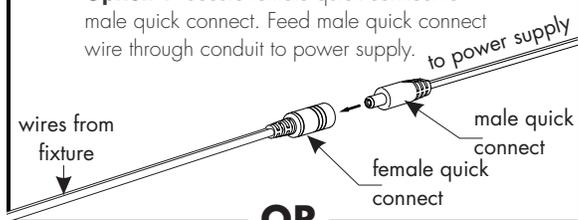
<p>3 3.1 Follow one of the two options to connect the fixture to the power supply.</p> <p>Option 1- Secure female quick connect to male quick connect. Feed male quick connect wire through conduit to power supply.</p> 
<p>Option 2- Feed wire whip to the power supply.</p> 

Myka - Installation Instructions

Models MK-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

REVO.5
10022024

4 / 8

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SURFACE MOUNT ONLY
6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
7. INHERENTLY PROTECTED
8. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

Adjustable Hinge Installation

1

mounting bracket mounting hole

fixture mounting bracket

1.1 Slightly loosen both screws on the sides of the hinge bracket. Rotate the fixture to expose mounting hole.

2

#4 screw

Note: : Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instruction for additional information.
Note: More than one person is recommended for this installation.

2.1 Determine the location of the fixture. Then secure the fixture to the surface using the provided mounting screws.

2.2 Rotate the fixture to the desired angle then tighten the side screws to secure.

3 Follow one of the two options to connect the fixture to the power supply.

Option 1- Secure female quick connect to male quick connect. Feed male quick connect wire through conduit to power supply.

wires from fixture to power supply

male quick connect

female quick connect

OR

Option 2- Feed wire whip to the power supply.

wires from fixture

Myka - Installation Instructions

Models MK-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SURFACE MOUNT ONLY.
6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
7. INHERENTLY PROTECTED
8. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.


REVO.5
10022024

5 / 8


Blade Louver Installation

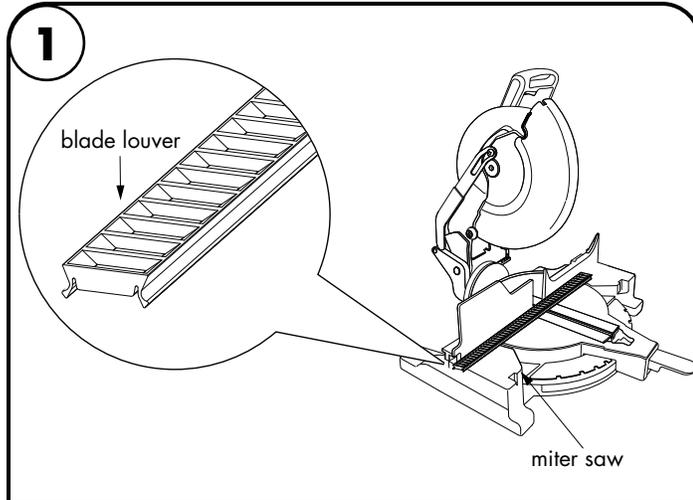

- 1.1** Use miter saw to cut the blade louver into desired length. Make sure blade louver and fixture lens are the same length.

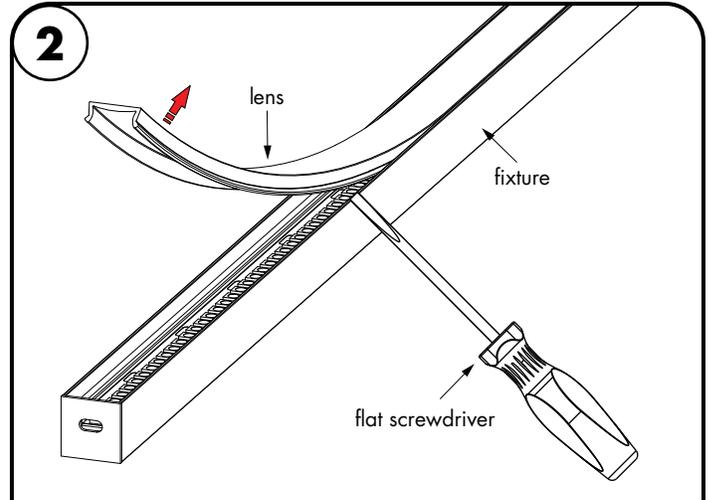

- 2.1** Use a flat screwdriver to remove the fixture lens.

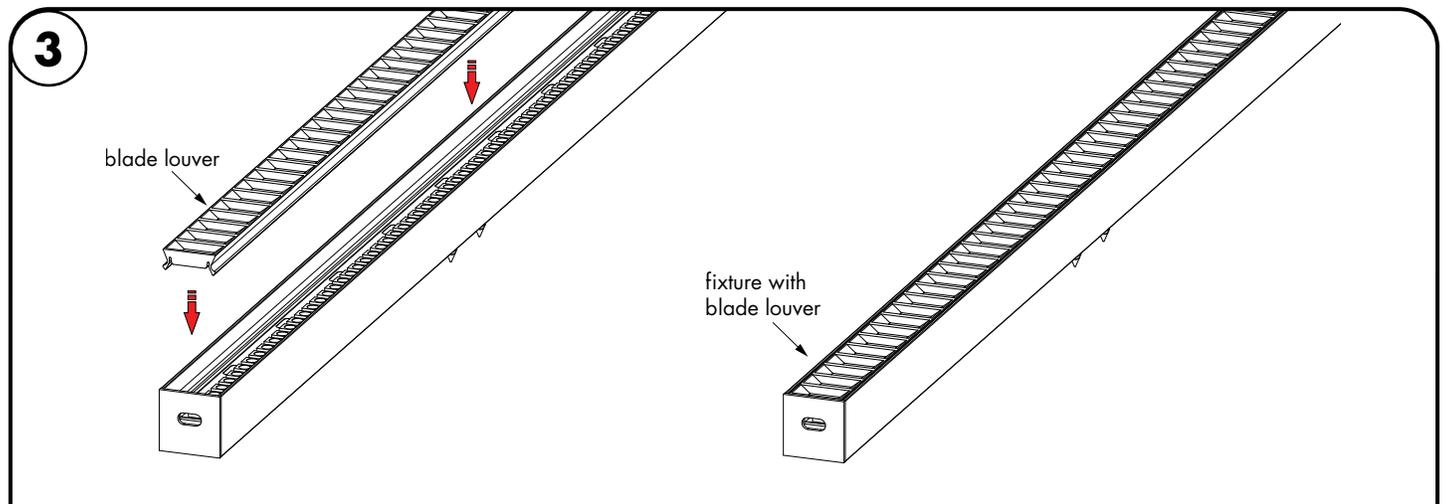

- 3.1** Snap the blade louver onto fixture.

Myka - Installation Instructions

Models MK-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SURFACE MOUNT ONLY.
6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
7. INHERENTLY PROTECTED
8. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.


REV0.5
10022024

6 / 8


power supplies at the end of the run

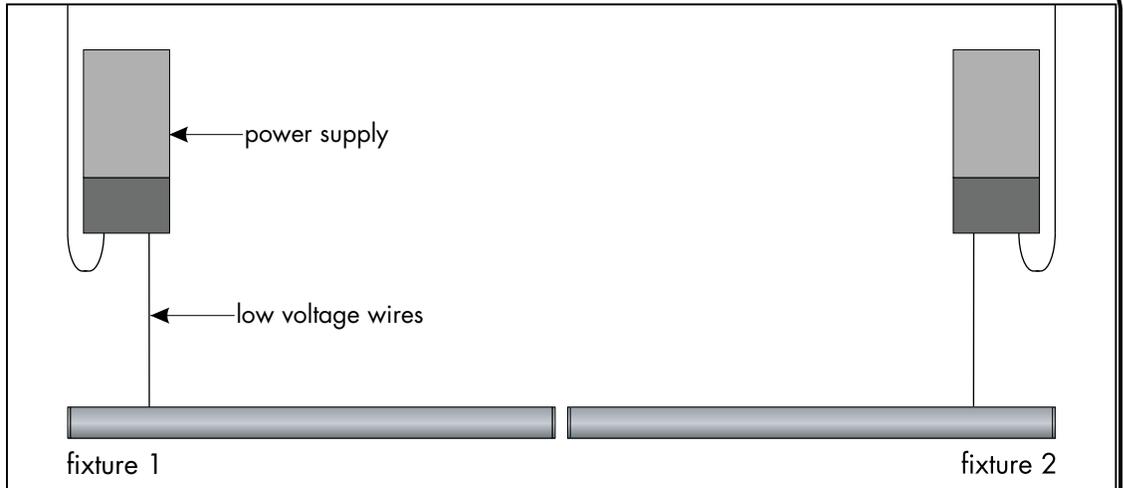

power supplies in the middle of the run

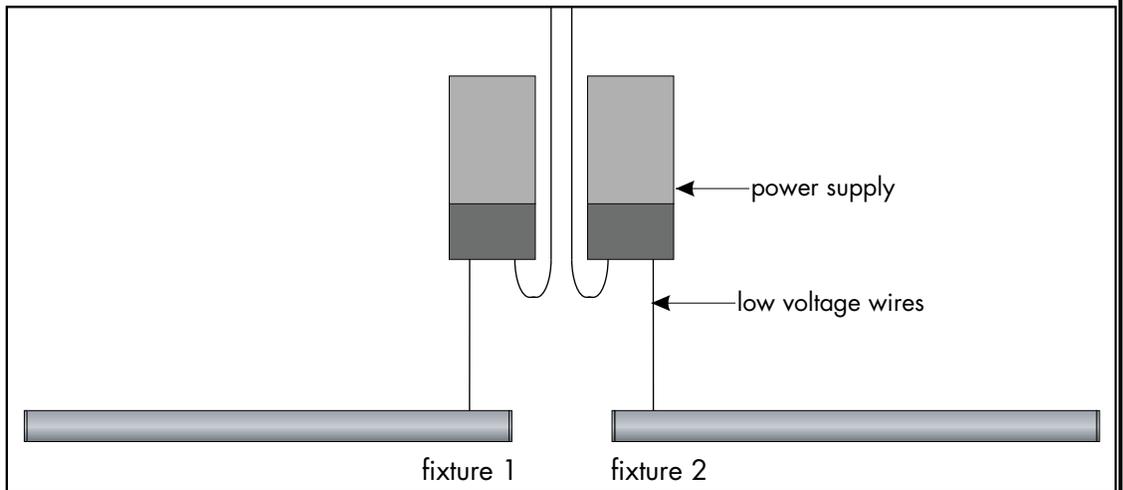

consecutive layout, NOT RECOMMENDED

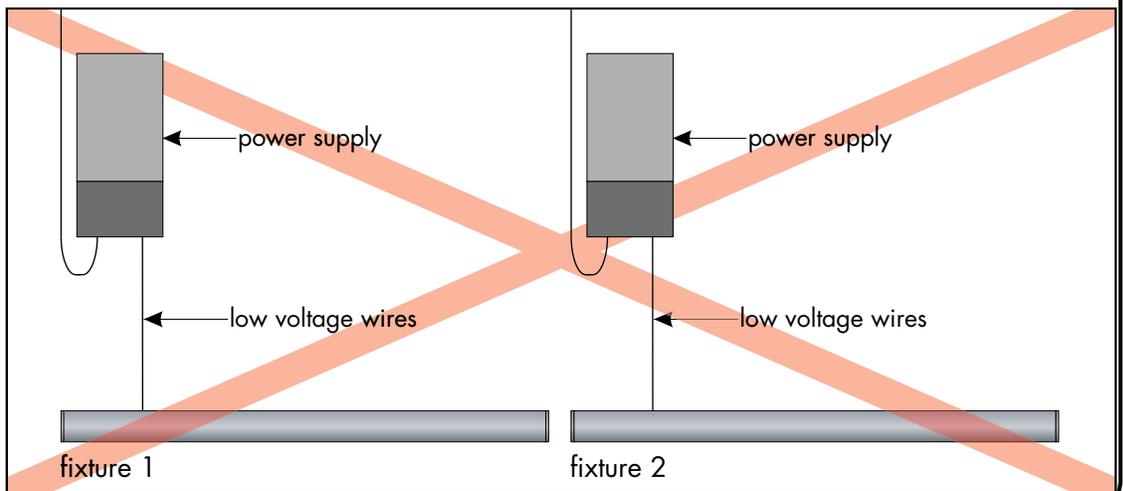

Myka - Installation Instructions

Models MK-XX

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SURFACE MOUNT ONLY
6. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
7. INHERENTLY PROTECTED
8. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.



REVO.5
10022024

8 / 8



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Power Supply Wiring Diagram

Note: Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instructions for additional information.



Static White
Wiring Diagram PDF