

Myka Recessed Asymmetric Trimmed Wet - Installation Instructions

Models MKRAW-XX

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. SUITABLE FOR WET LOCATIONS. MUST USE APPROPRIATE WEATHERPROOF RATED WIRE CONNECTORS.
4. 24 VOLTS DC.
5. TYPE IC (CEILING & WALL).
6. SUITABLE FOR GROUND MOUNTED-RECESSED, ACCESS ABOVE CEILING REQUIRED.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.




REVO.4
03112025

1 / 3



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

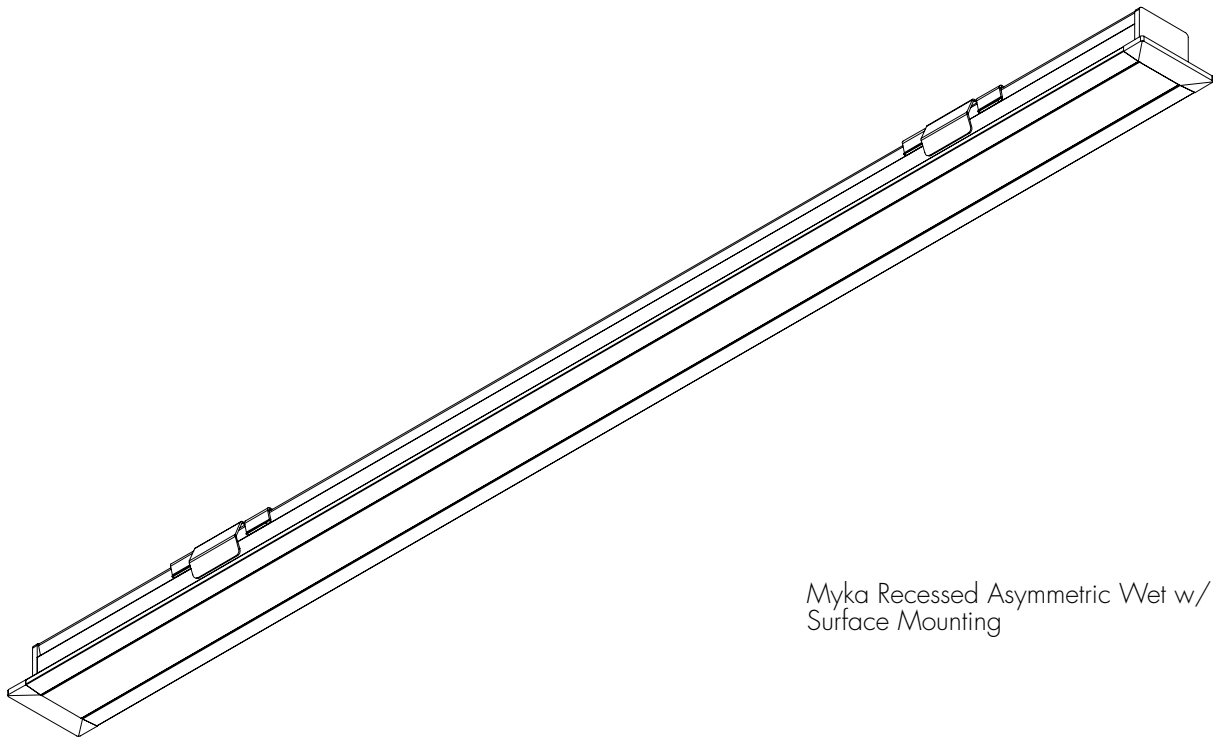

Myka Recessed Asymmetric Wet w/ Hard Surface Mounting

Myka Recessed Asymmetric Trimmed Wet - Installation Instructions

Models MKRAW-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

REVO.4
03112025

2 / 3

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. SUITABLE FOR WET LOCATIONS. MUST USE APPROPRIATE WEATHERPROOF RATED WIRE CONNECTORS.
4. 24 VOLTS DC.
5. TYPE IC (CEILING & WALL).
6. SUITABLE FOR GROUND MOUNTED-RECESSED, ACCESS ABOVE CEILING REQUIRED.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

1

Note: The fixtures can be installed in various mounting materials. As long as the recessed depth is considered as shown below. These light fixtures can be installed in a up or down position. Reference specific model for accurate dimensions.

1.1 On the left is the Myka Recessed Asymmetric Wet with the Gypsum Mounting spring brackets. On the right is the Myka Recessed Asymmetric Wet with the Hard Surface Mounting brackets.

2

2.1 Route slots onto the surface with the proper width and depth to accommodate aluminum extrusion. Use drawing above as reference.

3

3.1 For mounting bracket options only: Prior to installing the fixture, slide the mounting brackets on the back of the fixture. To evenly distribute the weight of the fixture.

hard surface mounting bracket,
such as wood, stone, tile

TOP
VIEW

FRONT
VIEW

Myka Recessed Asymmetric Trimmed Wet - Installation Instructions

Models MKRAW-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

REVO.4
03112025

3 / 3

Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. SUITABLE FOR WET LOCATIONS. MUST USE APPROPRIATE WEATHERPROOF RATED WIRE CONNECTORS.
4. 24 VOLTS DC.
5. TYPE IC (CEILING & WALL).
6. SUITABLE FOR GROUND MOUNTED-RECESSED, ACCESS ABOVE CEILING REQUIRED.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

4

Note: Fixture wires must be considered, prior to installing. Reference wiring diagram for additional information on step 5.


Note: Follow one of the two mounting options, to properly install fixture.

HS mounting:
Hard surface
mounting bracket

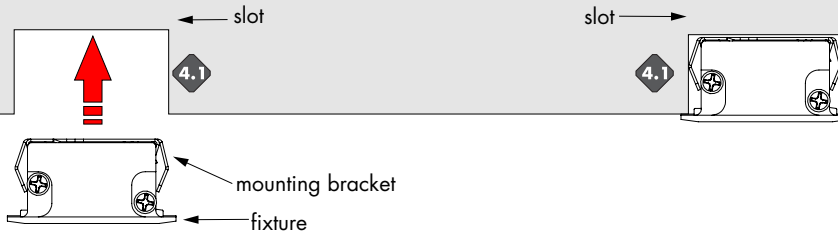

4.1 For hard surface mounting bracket option: Align the mounting brackets to the cutout slot, then carefully push the fixture completely inside to the slot to secure.

5

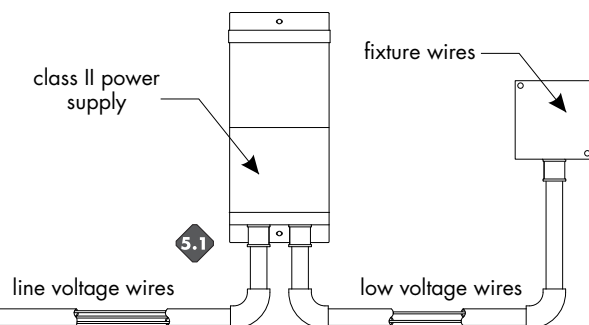

5.1 Ensure the correct (wattage & voltage) power supply is used to power the fixture. Then proceed to connect the fixture wires from fixture to the power supply. For more information please refer to power supply wiring instructions.

Power Supply Wiring Diagram

Note: Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instructions for additional information.



Static White
Wiring Diagram PDF