



Features

- IP20 rating for dry and damp location
- Constant voltage output
- Input Voltage: 120-277VAC
- Dimmable with 0-10V and leading/trailing edge dimmers
- Dim-to-off, with minimum dimming percentage: 1%
- Flicker-free dimming
- Cooling by free air convection
- Full protection metal case
- Auto reset breakers, from short circuit, overloading, & over temperature
- 5 year Warranty



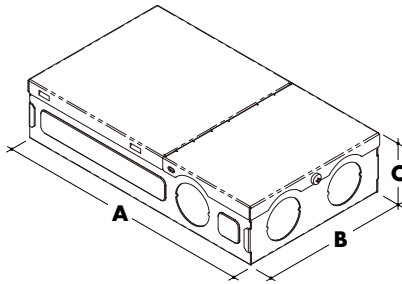
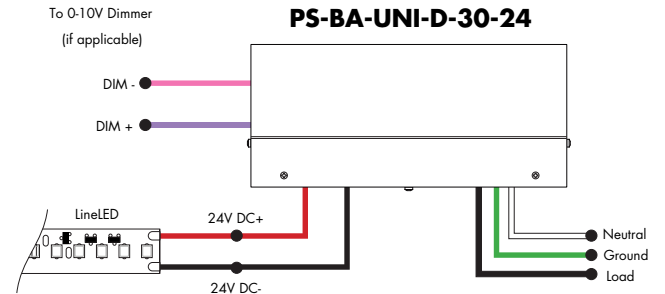
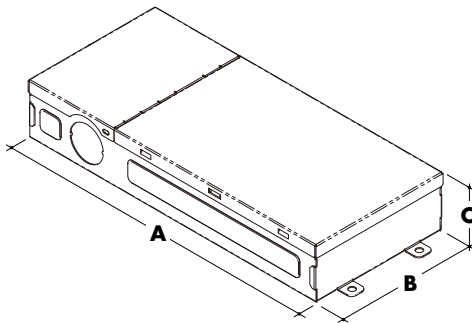
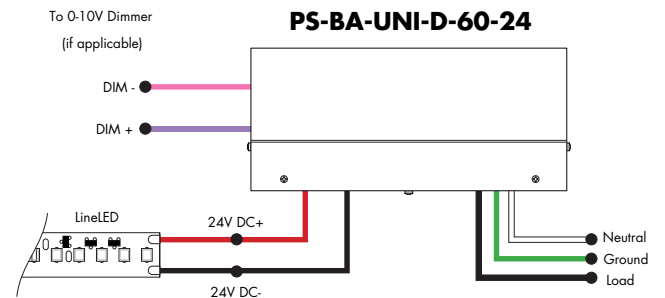
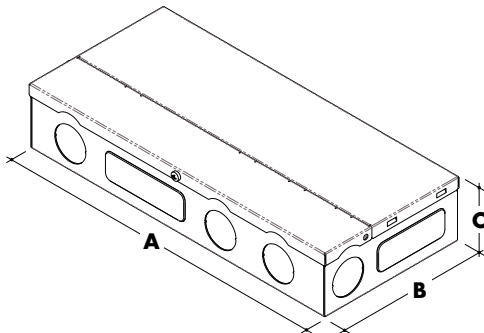
Technical Information

MODEL		PS-BA-UNI-D-30-24	PS-BA-UNI-D-60-24	PS-BA-UNI-D-96-24
ELECTRICAL	Voltage/ Frequency	120-277V AC @ 50/60Hz	120-277V AC @ 50/60Hz	120-277V AC @ 50/60Hz
	Inrush Current	70A @ 277V	80A @ 277V	80A @ 277V
	Power Factor	> 0.94 @ 120~277V*	> 0.94 @ 120~277V*	> 0.94 @ 120~277V*
	Efficiency	0.79 @ 120V* 0.80 @ 277V*	0.84 @ 120V* 0.86 @ 277V*	0.83 @ 120V* 0.86 @ 277V*
	Max Input Current	0.35A @ 120V 0.17A @ 277V	0.63A @ 120V 0.30A @ 277V	1.05A @ 120V 0.45A @ 277V
	Max Output Power	30W	60W	96W
	Max Output Current	1.25A	2.5A	4.0A
	Output Voltage	24V DC	24V DC	24V DC
	Total Harmonic Distortion	< 20%*	< 20%*	< 20%*
	Start Up Time	< 0.5S*	< 0.5S*	< 0.5S*
	Minimum Load	10%	10%	10%
	Dimming (0-10V)	1% - 100% LINEAR	1% - 100% LINEAR	1% - 100% LINEAR
	Dimming (Phase)	1% - 100% LOG	1% - 100% LOG	1% - 100% LOG
	0-10V Current Draw	0.25mA	0.25mA	0.25mA
RATING	Environment	Dry IP20 NEMA 1	Dry IP20 NEMA 1	Dry IP20 NEMA 1
	Compliance	UL 8750	UL 8750	UL 8750
	Ambient Operating Temperature Range	- 40 to 60°C	- 40 to 60°C	- 40 to 60°C
DIMENSIONS	Length A	6.10"	7.93"	8.29"
	Width B	3.35"	3.35"	4.10"
	Height C	1.33"	1.32"	1.59"
Net. Weight		1.1 lbs	1.87 lbs	2.2 lbs

*At max load

Ordering Code

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-BA - Basics Power Supply, 120-277VAC	UNI - 0-10V, Phase Dimming	D - Dry	30 - 30 W 60 - 60 W 96 - 96 W	24 - 24 VDC

Product Dimensions**General Wiring Diagram****Product Dimensions****General Wiring Diagram****Product Dimensions****General Wiring Diagram**