

**Features**

The RO1.5 Channel is a linear aluminum extrusion that has been designed to fit many LED lighting needs. Mounting bracket option allow for great flexibility in any application; from fixed installations like a closet rod light fixture. Substantial aluminum mass in profile provides excellent heat sink for high power LEDs. RO1.5 extrusion comes with two choices of optical lenses. Extrusion and lenses are field cuttable.

**Finish**

Silver anodized, White, Black, Bronze

**Mounting**

Multiple mounting brackets

**Diffuser Lens**


Polycarbonate, snap-in-place, UV resistant

**Warranty**

7 Years



**Product Dimensions**

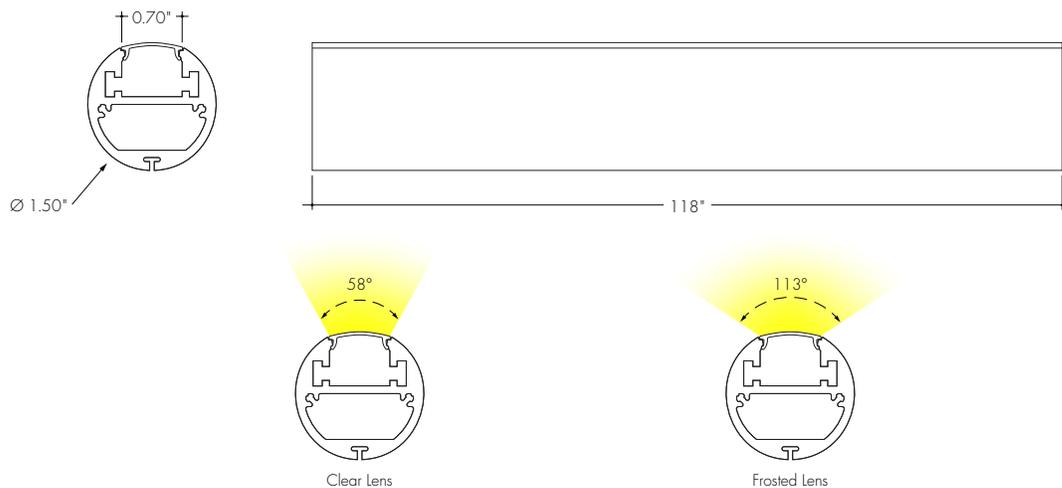

Lens Options	
Actual Length	- 118"
Available Lenses	- Clear - Frosted

**TRANSMISSION PERCENTAGE**  
(COMPARED TO LED TAPE WITHOUT CHANNEL)

LENS	TRANSMISSION %
Clear Lens	65%
Frosted Lens	41%

See LED tape spec sheet for lens dotting characteristics & compatibility

**Ordering code**

MODEL	LENGTH	LENS	FINISH <sup>2</sup>
RO15 - RO1.5 Channel	118 - 118" <sup>1</sup>	C - Clear F - Frosted	BASE SA - Silver Anodized POWDER COATED BK - Black BZ - Bronze WH - White

1 - For Channels and Lenses over 96", incremental shipping charges will apply.

2 - Powder Coat finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.

All accessories sold separately.

### Mounting Brackets

**MC-R3-XX**  
Mounting Clip



XX	Color
SA	Silver Anodized
WH	White
BK	Black
BZ	Bronze

**MC-RO15-MF-XX**  
End support



XX	Color
SA	Silver Anodized
WH	White
BK	Black
BZ	Bronze

### End Caps

**EC-RO15-H3-XX**  
Endcap



**EC-RO15-H5-XX**  
Endcap with powerfeed opening



XX	Color
SA	Silver Anodized
WH	White
BK	Black
BZ	Bronze

