


Solo 11 HE 48V DC Track

PRODUCT OVERVIEW

HIGH EFFICIENCY LIGHT ENGINE

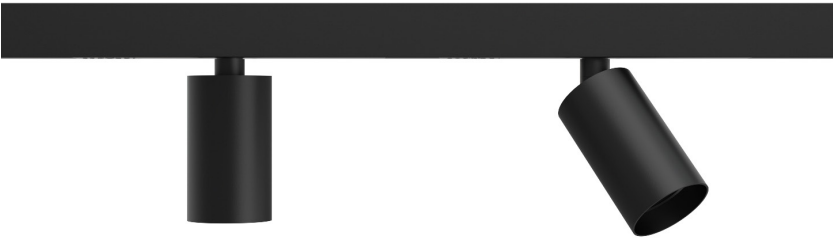

KEY FEATURES

- Beam Options: 19 | 30 | 42 | 47
- Light Engine Performance: 1086lm | 8.80W
- Movement: 360 Pan | 90 Tilt
- Tool-less field changeable optics
- Interchangeable accessories
- High CRI
- Part L1 / L2 (General & Display) Compliant
- Title 24 JA8 Certified



OVERVIEW

Solo 11 HE 48V DC Track is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has four site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. Our 1086lm | 8.80W light engine has a max peak intensity of 6644cd. An accessory holder is available separately that can accommodate 37mm (1.45") lenses and louvers. This product mounts to the 48V DC Stucchi Multisystem Evo Track and requires an external 17.6V Constant Voltage LED power supply to the track.

PERFORMANCE

	High Efficiency			
	Narrow	Medium	Wide	V. Wide
FWHM	19°	30°	42°	47°
Luminous Flux	882 lm	1086 lm	972 lm	949 lm
Peak Intensity	6644 cd	4212 cd	2081 cd	1621 cd
CCT	2700K 3000K			
CRI Min.	90 90			
LED Current	0.500 A			
Voltage	48 V			
Input Wattage	9.78 W			
Efficacy	123.4 lm/W			
Driver Type	Constant Voltage Remote AC to 48VDC			
Class	SELV Class III			

ORDER CODE

Model	Type	Output	CCT	Beam Angle	Voltage	Control	Adaptor Finish	Finish
SOL11 Solo 11	MU Multisystem Track	HE High Efficiency	27K 2700K	NR Narrow 19°	48 48V DC	010G 0-10V Log	WH White	WH White
			30K 3000K	ME Medium 30°		LOC On-board	BK Black	BK Black
				WD Wide 42°		DALI DALI		AL Br. Aluminium
				VW Very Wide 47°				RBZ Rubbed Bronze
								BR Br. Brass
								PB Polished Brass

Example code: SOL11-MU-HE-27K-NR-48-010G-WH-WH

See Drivers, Power Supplies and Accessories sections for further order codes

LIGHT ENGINE SELECTION

This product specification sheet references our HE light engine, this product is also available with Intense and Plus static white light engines, please refer to their separate sheets.

▸ intense ▸

Precision's signature intense light engines offer tight, surgical beams combined with the highest peak intensity values available.

- Ultra-tight beams
- High Peak Cd

plus⁺

Precision's plus light engines offer the best balance between delivered lumens, beam quality and outstanding colour rendition.

- Increased Lumen Output
- CRI 98 Typical

HE

Precision's high efficiency light engines deliver the highest possible lumen values as well as our outstanding energy efficiency

- Maximum Lumen Output
- Maximum Energy Efficiency

LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	10.77 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	Declared
Lifetime	L90B10 50,000hrs
Warranty	5 Years


UK PART L	
Part L1A / L1B (Dwellings)	Compliant 154 lm/W Source lm (1355 lm) / Source W (8.80 W)
Part L2A (General)	Compliant 111 lm/W Delivered (1086 lm) / System W* (9.78 W)
Part L2A (Display)	Compliant 154 lm/W Source lm (1355 lm) / Source W (8.80 W)
*System W includes driver losses	

SOLO 11 HE 48V DC TRACK

DIMENSIONS & FINISHES

HIGH EFFICIENCY LIGHT ENGINE

DIMENSIONS

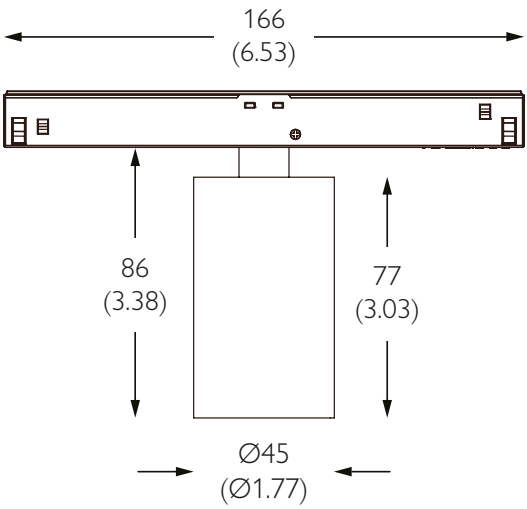

MECHANICAL

Location	IP20 Indoor Dry Location Only	Cutout	N/A
Mounting	48V Track Recessed Trimless Recessed Surface Suspended	Ceiling Thickness	N/A
Adjustability	360 Pan 90 Tilt	Product Class	SELV Class III
Lockable	Pan	Material	Machined AL 6063-T6 Machined Brass
Accessories	Lenses Louver	Weight	170g 235g* 0.37lb 0.52lb*

FINISHES



100W | Direct to track | Remote | Constant Voltage

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Voltage
Location	IP20 Indoor Location Only
Dimming Control	Direct to track
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	Refer to guide



	All CCT's		L	W	H
Max. Lights	1 to 8	mm	190	52	37
Order Code	PSCV-100-48-N1-MW	in	7.48	2.05	1.46

200W | Direct to track | Remote | Constant Voltage

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Voltage
Location	IP20 Indoor Location Only
Dimming Control	Direct to track
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	Refer to guide




	All CCT's		L	W	H
Max. Lights	1 to 16	mm	195	68	40
Order Code	PSCV-200-48-N1-MW	in	7.68	2.68	1.57

48V TRACK CABLE DISTANCES

100W	A = Distance from power supply to track 2 x 16 AWG (1.5mm²) cable							
	m	ft	m	ft	m	ft	m	ft
	5	16.4	10	32.8	20	65.6	30	98.4
	B = Track Length with max 5.5% V drop							
	m	ft	m	ft	m	ft	m	ft
	50	164	50	164	40	131.2	25	82
	200W	40	131.2	30	98.4	-	-	-

96W | Direct to track | Remote | Constant Voltage

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Voltage
Location	IP20 Indoor Location Only
Dimming Control	Direct to track
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	Refer to guide

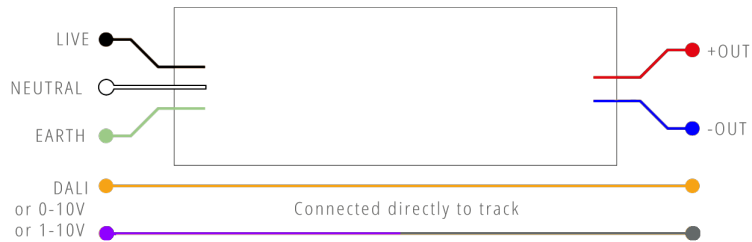

	All CCT's		L	W	H
Max. Lights	1 to 8	mm	220	95	40
Order Code	USCV-96-48-N1-SC-EN	in	8.66	3.74	1.57

48V TRACK CABLE DISTANCES

100W	A = Distance from power supply to track 2 x 16 AWG (1.5mm²) cable							
	m	ft	m	ft	m	ft	m	ft
	5	16.4	10	32.8	20	65.6	30	98.4
	B = Track Length with max 5.5% V drop							
	m	ft	m	ft	m	ft	m	ft
	50	164	50	164	40	131.2	25	82
	200W	40	131.2	30	98.4	-	-	-

SOLO 11 HE 48V DC TRACK

PHOTOMETRY




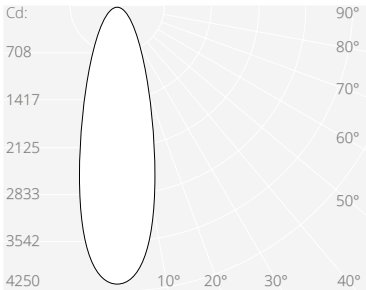
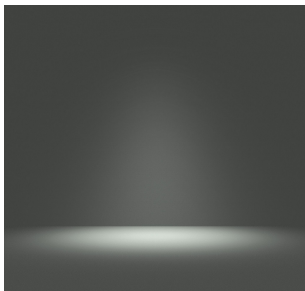
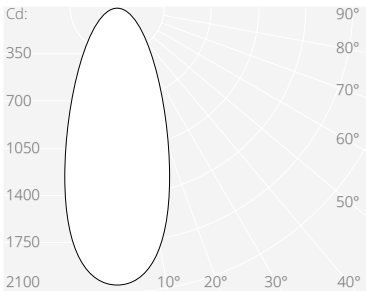
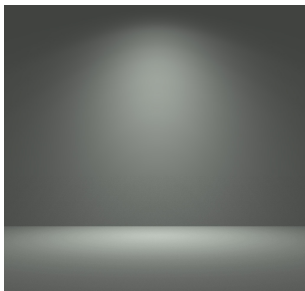
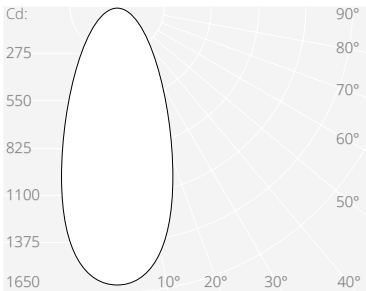
HIGH EFFICIENCY LIGHT ENGINE

OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
2400K	-	-	-	-	-	-
2700K	1.00	90	57	90	101	1086
3000K	1.00	90	57	90	101	1086
3500K	-	-	-	-	-	-
4000K	-	-	-	-	-	-

Colour Consistency: 2 SDCM



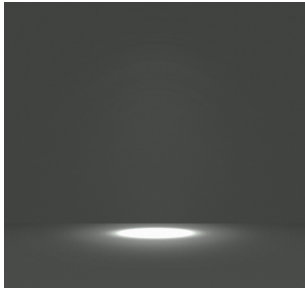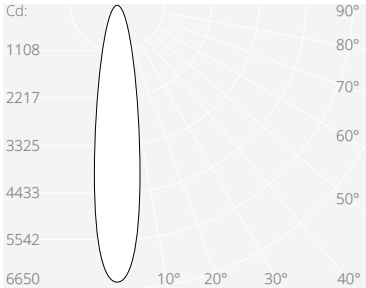

PHOTOMETRY

NARROW				<table><tr><td>0.33m</td><td>6644lx</td><td>738fc</td><td>1.0'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>0.67m</td><td>1661lx</td><td>185fc</td><td>2.0'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>1.00m</td><td>738lx</td><td>82fc</td><td>3.0'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>1.34m</td><td>415lx</td><td>46fc</td><td>4.0'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>1.67m</td><td>266lx</td><td>30fc</td><td>5.0'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>21fc</td><td>6.0'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.33m	6644lx	738fc	1.0'	1m			3'	0.67m	1661lx	185fc	2.0'	2m			6'	1.00m	738lx	82fc	3.0'	3m			9'	1.34m	415lx	46fc	4.0'	4m			12'	1.67m	266lx	30fc	5.0'	5m			15'			21fc	6.0'				18'
0.33m	6644lx	738fc	1.0'																																																	
1m			3'																																																	
0.67m	1661lx	185fc	2.0'																																																	
2m			6'																																																	
1.00m	738lx	82fc	3.0'																																																	
3m			9'																																																	
1.34m	415lx	46fc	4.0'																																																	
4m			12'																																																	
1.67m	266lx	30fc	5.0'																																																	
5m			15'																																																	
		21fc	6.0'																																																	
			18'																																																	
MEDIUM				<table><tr><td>0.54m</td><td>4212lx</td><td>468fc</td><td>1.6'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>1.07m</td><td>1053lx</td><td>117fc</td><td>3.2'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>1.61m</td><td>468lx</td><td>52fc</td><td>4.8'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>2.14m</td><td>263lx</td><td>29fc</td><td>6.4'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>2.68m</td><td>168lx</td><td>19fc</td><td>8.0'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>13fc</td><td>9.6'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.54m	4212lx	468fc	1.6'	1m			3'	1.07m	1053lx	117fc	3.2'	2m			6'	1.61m	468lx	52fc	4.8'	3m			9'	2.14m	263lx	29fc	6.4'	4m			12'	2.68m	168lx	19fc	8.0'	5m			15'			13fc	9.6'				18'
0.54m	4212lx	468fc	1.6'																																																	
1m			3'																																																	
1.07m	1053lx	117fc	3.2'																																																	
2m			6'																																																	
1.61m	468lx	52fc	4.8'																																																	
3m			9'																																																	
2.14m	263lx	29fc	6.4'																																																	
4m			12'																																																	
2.68m	168lx	19fc	8.0'																																																	
5m			15'																																																	
		13fc	9.6'																																																	
			18'																																																	
WIDE				<table><tr><td>0.77m</td><td>2081lx</td><td>231fc</td><td>2.3'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>1.54m</td><td>520lx</td><td>58fc</td><td>4.6'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>2.30m</td><td>231lx</td><td>26fc</td><td>6.9'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>3.07m</td><td>130lx</td><td>14fc</td><td>9.2'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>3.84m</td><td>83lx</td><td>9fc</td><td>11.5'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>6fc</td><td>13.8'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.77m	2081lx	231fc	2.3'	1m			3'	1.54m	520lx	58fc	4.6'	2m			6'	2.30m	231lx	26fc	6.9'	3m			9'	3.07m	130lx	14fc	9.2'	4m			12'	3.84m	83lx	9fc	11.5'	5m			15'			6fc	13.8'				18'
0.77m	2081lx	231fc	2.3'																																																	
1m			3'																																																	
1.54m	520lx	58fc	4.6'																																																	
2m			6'																																																	
2.30m	231lx	26fc	6.9'																																																	
3m			9'																																																	
3.07m	130lx	14fc	9.2'																																																	
4m			12'																																																	
3.84m	83lx	9fc	11.5'																																																	
5m			15'																																																	
		6fc	13.8'																																																	
			18'																																																	
VERY WIDE				<table><tr><td>0.87m</td><td>1621lx</td><td>180fc</td><td>2.6'</td></tr><tr><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>1.74m</td><td>405lx</td><td>45fc</td><td>5.2'</td></tr><tr><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>2.61m</td><td>180lx</td><td>20fc</td><td>7.8'</td></tr><tr><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>3.48m</td><td>101lx</td><td>11fc</td><td>10.4'</td></tr><tr><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td>4.35m</td><td>65lx</td><td>7fc</td><td>13.0'</td></tr><tr><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td>5fc</td><td>15.7'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.87m	1621lx	180fc	2.6'	1m			3'	1.74m	405lx	45fc	5.2'	2m			6'	2.61m	180lx	20fc	7.8'	3m			9'	3.48m	101lx	11fc	10.4'	4m			12'	4.35m	65lx	7fc	13.0'	5m			15'			5fc	15.7'				18'
0.87m	1621lx	180fc	2.6'																																																	
1m			3'																																																	
1.74m	405lx	45fc	5.2'																																																	
2m			6'																																																	
2.61m	180lx	20fc	7.8'																																																	
3m			9'																																																	
3.48m	101lx	11fc	10.4'																																																	
4m			12'																																																	
4.35m	65lx	7fc	13.0'																																																	
5m			15'																																																	
		5fc	15.7'																																																	
			18'																																																	

SOLO 11 HE 48V DC TRACK






OPTICS


There are 4 interchangeable optics








Optic	Optic	Optic	Optic
			
Narrow TIR Optic Molded ID 15	Medium TIR Optic Molded ID 24	Wide TIR Optic Molded ID 36	Very Wide TIR Optic Molded ID 50
Order Code HKST-35-15-SIL	Order Code HKST-35-24-SIL	Order Code HKST-35-36-SIL	Order Code HKST-35-50-SIL

ACCESSORIES

This product can hold 2 x accessories using the double accessory holder. Accessories are pre-installed unless otherwise requested.

Accessory Holder	Glare Control	Beam Shaping	Beam Shaping	Colour Change
				
Double Accessory Holder W43xH14mm W1.69xH0.55"	Honeycomb Louver W37xH3.2mm W1.46xH0.13"	Softening Lens W37xH3.2mm W1.46xH0.13"	Linear Lens W37xH3.2mm W1.46xH0.13"	1/4 CTO W37xH1.8mm W1.46xH0.07"
Order Code 244-BK	Order Code 995-37-BK	Order Code 991-37	Order Code 992-37	Order Code 997-1/4CTO-37

Colour Change

Custom Colour Filter W37xH1.8mm W1.46xH0.07"
Order Code Contact Sales Rep

Linear	Softening	1/4 CTO	Honeycomb
			
			
Clip Included with holder	Accessory	Double Accessory Holder Can hold 2 accessories	