

TECHNICAL DESCRIPTION

The Surface minipoint is a mounting solution for ever-changing installations with the benefit of an additional height of approximately 59mm. Perfect for retail and display case applications, the surface minipoint allows jack luminaires to be plugged and unplugged in seconds whilst providing an elevated mounting position for Stacko luminaire modules. The surface Minipoint has a small $\varnothing 10\text{mm}$ cut-out and is mounted via 2 screws. Available in standard, premium and custom finishes, the Surface minipoint can be specified to match any interior vision.

CATEGORY Interior use only IP20

MATERIAL Machined Aluminium

DEC. COVER FINISH Brushed Aluminium | White | Black | Rubbed Bronze* | Polished Brass* | Brushed Brass* | Custom RAL *

SYSTEM Jack Minipoint

ACCESSORIES N/A


LED TYPE Constant current

CUT OUT HOLE $\varnothing 10\text{mm}$ & 2 pilot holes

WEIGHT AL/EBA/WH - 40.7g | RB/SB/PB/PN - 86.6g

* All custom & premium finishes are built and finished to order. These are subject to an extended lead time.

LUMINAIRE COMPATIBILITY

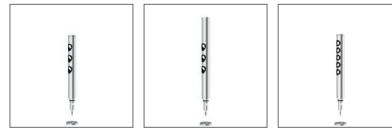

1003-E
Stacko Tilt
Fixed End

1003-M
Stacko Tilt
Fixed Mid


1005-E
Stacko Straight
Fixed End



1005-M
Stacko Straight
Fixed Mid

1011-E
Stacko Aim End

1011M
Stacko Aim Mid

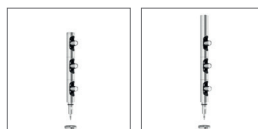

1013-E
Stacko Multi-
Aim 3 End

1013-M
Stacko Multi-
Aim 3 Mid

RAN AT 350mA ONLY

Brushed Aluminium	White 9010	Matte Anodised Black	Rubbed Bronze *	Polished Brass *	Brushed Brass *	Polished Nickel *
770-M-B-MPN-AL	770-M-B-MPN-WH	770-M-B-MPN-EBA	770-M-B-MPN-RB	770-M-B-MPN-PB	770-M-B-MPN-SB	770-M-B-MPN-PN