
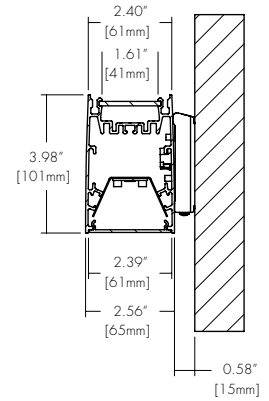


Features

- Full length seamless lenses range from 4 to 12 feet.
- This built to order, architecturally designed luminaire features Up AND Down light output
- Integrated drivers and controls make this fixture easy to install and widely applicable
- The subtle flared Vesta Wall Mount fixtures feature a symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

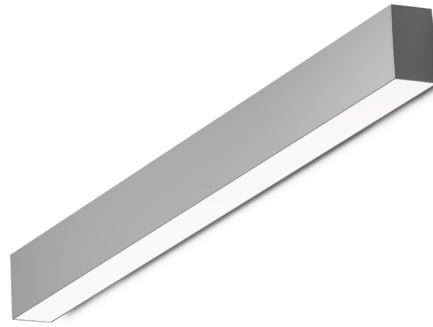

Finish Options

- White
 Black
 Silver

Technical Information

OUTPUT OPTIONS (Frosted Lens)		04	06	08	10	12
DOWN	Lumen Output	400 lm/ft	566 lm/ft	843 lm/ft	1034 lm/ft	1220 lm/ft
	Average Power Consumption	3.8 W/ft	5.7 W/ft	9.4 W/ft	12.0 W/ft	15.1 W/ft
	Efficacy	104 lm/W	100 lm/W	90 lm/W	87 lm/W	81 lm/W
UP	Lumen Output	454 lm/ft	628 lm/ft	788 lm/ft		
	Average Power Consumption	3.8 W/ft	5.6 W/ft	7.4 W/ft		
	Efficacy	117 lm/W	112 lm/W	106 lm/W		

OUTPUT OPTIONS (Asymmetric Lens)		04	06	08
DOWN	Lumen Output	433 lm/ft	648 lm/ft	800 lm/ft
	Average Power Consumption	8.1 W/ft	13.8 W/ft	17.3 W/ft
	Efficacy	54 lm/W	47 lm/W	46 lm/W
UP	Lumen Output	433 lm/ft	648 lm/ft	800 lm/ft
	Average Power Consumption	8.1 W/ft	13.8 W/ft	17.3 W/ft
	Efficacy	54 lm/W	47 lm/W	46 lm/W

CCT	Multiplier	CRI	TM-30		
			R _f	R _g	R ₉
2700K	0.92	93+	92	100	50+
3000K	0.97	93+	92	103	50+
3500K	1.00	93+	93	102	50+
4000K	1.07	93+	92	101	50+

Ordering Code

Integral Driver Example: Fixture VSD-WM_UD-6FT-04-04-35K-F-F-WH-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT DOWN ¹	OUTPUT UP ¹	CCT	LENS DOWN ¹	LENS UP ¹	FINISH
VSD-WM - Vesta Dry, Wall Mount UP AND Down	4ft - 4 feet 6ft - 6 feet 8ft - 8 feet 10ft - 10 feet 12ft - 12 feet XX - System ⁶	04 - 400 lm/ft (3.8 W/ft) 06 - 566 lm/ft (5.7 W/ft) 08 - 843 lm/ft (9.4 W/ft) 10 - 1034 lm/ft (12 W/ft) 12 - 1220 lm/ft (15 W/ft)	04 - 454 lm/ft (3.9 W/ft) 06 - 628 lm/ft (5.6 W/ft) 08 - 788 lm/ft (7.4 W/ft)	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	F - Frosted Lens BL - Black Lens	F - Frosted Lens	Standard WH - White BK - Black SL - Silver

DRIVER	DRIVER OPTIONS
--------	----------------

- 010S - 010V, 1% Dimming, 120/277V
 0103 - 010V, 1% Dimming, 347V Only⁴
 NA - None
 EMG - Emergency Driver^{3,4}
 CSMB - Casambi²
 AWRN - Athena⁵


¹ - Must select OUTPUT and LENS for both DOWN and UP.
² - CSMB only available with 010S.
³ - EMG only available with 010S.

⁴ - EMG Battery Back-Up not available on Length 4ft or 6ft, illuminates 4ft or 6ft section based on lumen output.
⁵ - AWRN sensor not available.
⁶ - Customizable configurations available, contact factory (MOD only).


CONTACT FACTORY FOR MORE OPTIONS.

Lens Down

F
Frosted Lens




BL
Black Lens




Lens Up

F
Frosted Lens



Cut Lengths


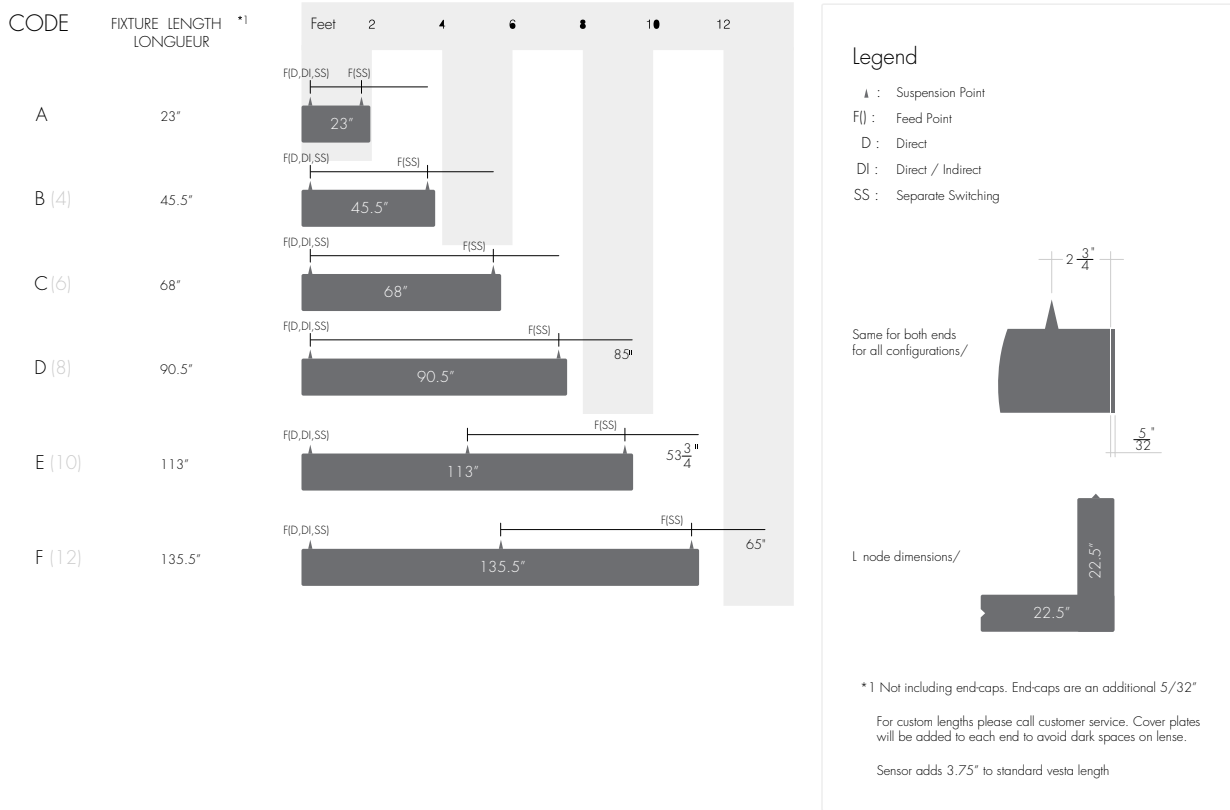


Standard Finish

BK
Black

WH
White


SL
Silver



TM-30

2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

3000K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

3500K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

4000K



COLOR VECTOR GRAPHIC





— Reference Source — Test Source

Photometry



Static White Down Frosted Lens

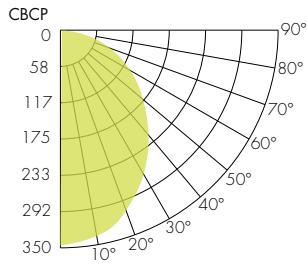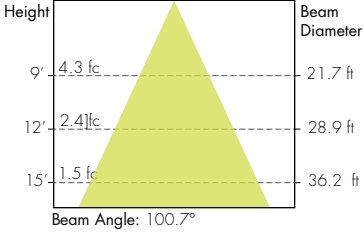



Static White Up Frosted

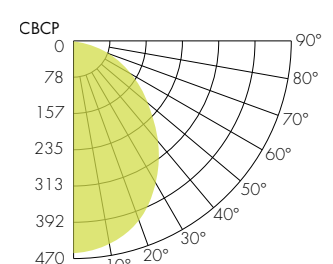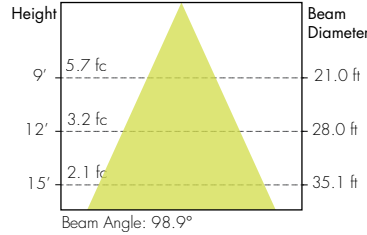



Static White Down Asymmetric Lens

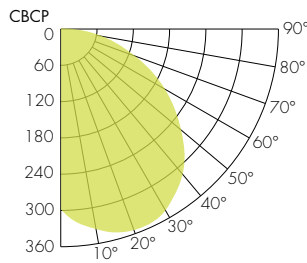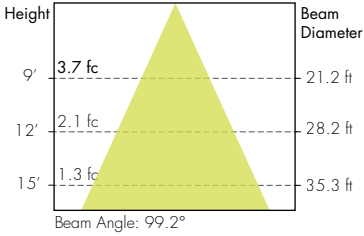

Static White Up Asymmetric

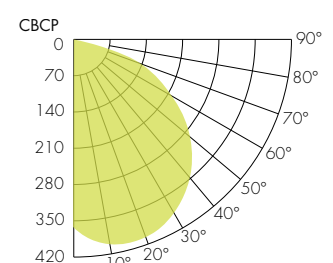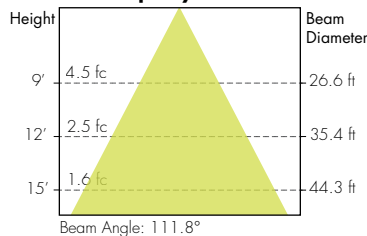

Static White Black Lens

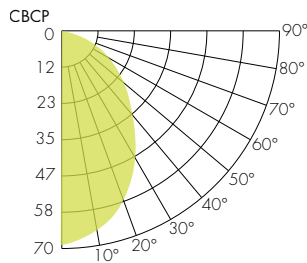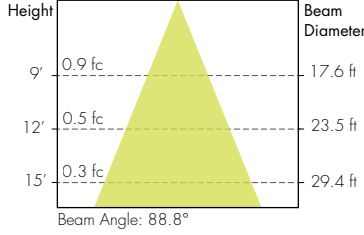

Static White Up Batwing

