
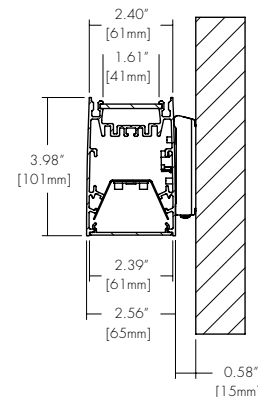


Features

- Full length seamless lenses range from 4 to 12 feet.
- This built to order, architecturally designed luminaire features Up AND Down light output.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- The subtle flared Vesta Wall Mount fixtures feature a symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty.

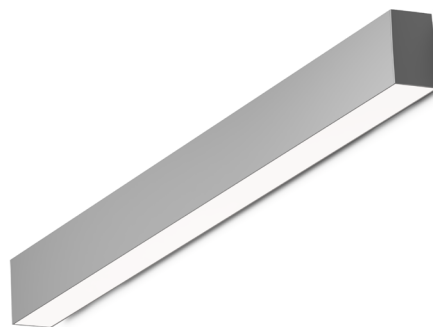

Finish Options

White Black Silver

RoHS

Technical Information

| OUTPUT OPTIONS | | TW04 | TW06 | TW08 |
|----------------|---------------------------|-----------|-----------|-----------|
| DOWN | Lumen Output | 418 lm/ft | 592 lm/ft | 776 lm/ft |
| | Average Power Consumption | 2.5 W/ft | 3.5 W/ft | 4.8 W/ft |
| | Efficacy | 20 lm/W | 21 lm/W | 21 lm/W |
| UP | Lumen Output | 418 lm/ft | 592 lm/ft | 776 lm/ft |
| | Average Power Consumption | 2.5 W/ft | 3.5 W/ft | 4.8 W/ft |
| | Efficacy | 20 lm/W | 21 lm/W | 21 lm/W |

| CCT | CRI | TM-30 | | |
|-------|-----|----------------|----------------|----------------|
| | | R _f | R _g | R ₉ |
| 2700K | 91 | 90 | 96 | 59 |
| 6500K | 93 | 87 | 97 | 73 |

Ordering Code

Integral Driver Example: Fixture VSD-WM_UD-6FT-TW04-TW04-27K65K-F-F-WH-010S-CSMB

Fixture

| MODEL | LENGTH | OUTPUT DOWN ^{1,2} | OUTPUT UP ^{1,2} | CCT | LENS DOWN ¹ | LENS UP ¹ | FINISH |
|---|--|--|--|--------------------------------------|------------------------|----------------------|---|
| VSD-WM-Vesta Dry, Wall Mount UP AND Down | 4ft-4 feet 6ft-6 feet 8ft-8 feet 10ft-10 feet 12ft-12 feet XX-System ⁶ | TW04-418 lm/ft (4.8 W/ft) ³ TW06-592 lm/ft (7.2 W/ft) TW08-776 lm/ft (9.6 W/ft) | TW04-418 lm/ft (4.8 W/ft) ³ TW06-592 lm/ft (7.2 W/ft) TW08-776 lm/ft (9.6 W/ft) | 27K65K-Tunable White, 2700K-6500K | F-Frosted Lens | F-Frosted Lens | Standard WH-White BK-Black SL-Silver |

DRIVER

DRIVER OPTIONS

010S-010V, 1% Dimming, 120/277V

NA-None
CSMB-Casambi⁴
AWNR-Athena⁵


1 - Must select OUTPUT and LENS for both DOWN and UP.
2 - Tunable White output numbers are at representative of 4000K
3 - TW04 Output is not available with 4ft length.

4 - CSMB only available with 010S.
5 - AWNR sensor not available.
6 - Customizable configurations available, contact factory (MOD only).


CONTACT FACTORY FOR MORE OPTIONS.

Lens Down


F
Frosted Lens



AS
Asymmetric Lens




BL
Black Lens




Lens Up


F
Frosted Lens




AS
Asymmetric Lens



BW
Batwing Lens (Only Lens Up)



Cut Lengths


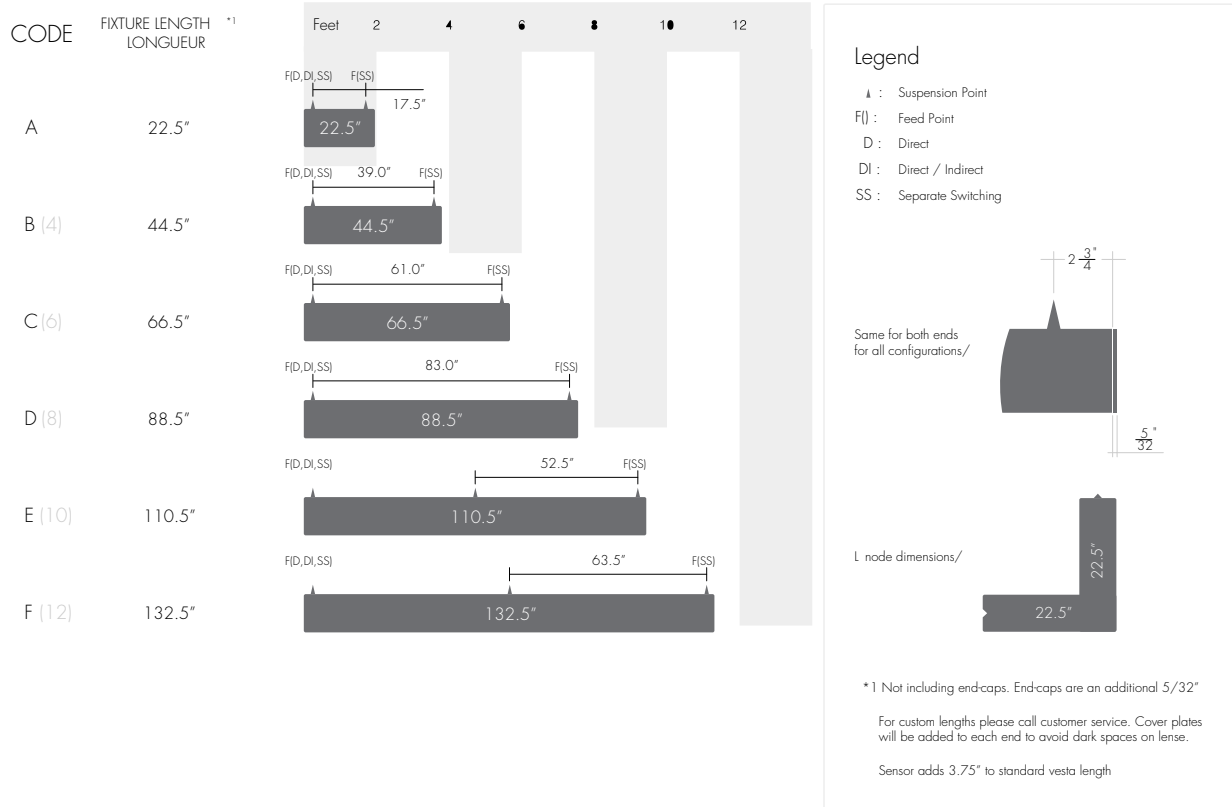


Standard Finish

BK
Black


WH
White

SL
Silver




TM-30

Tunable White 2700K



— Reference Source — Test Source

Tunable White 6500K



— Reference Source — Test Source

Photometry

Tunable White Down

