



VESTA

WALL MOUNT UP OR DOWN
TUNABLE WHITE LINEAR SYSTEM



Features

- Full length seamless lenses range from 2 to 12 feet.
- Choose either UP light or DOWN light with this architecturally, built to order LED luminaire
- Integrated drivers and controls make this fixture easy to install and widely applicable
- The subtle flared Vesta Wall Mount fixtures feature a symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

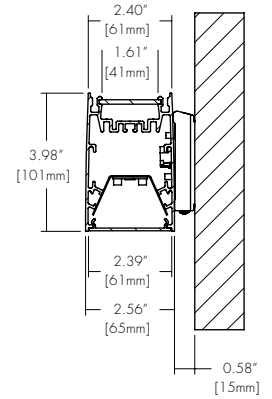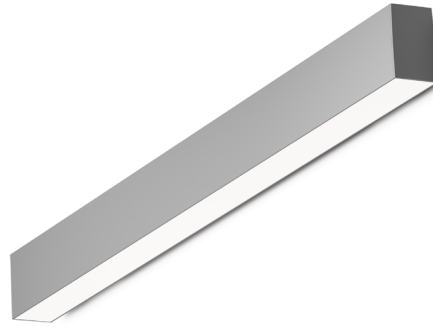

Finish Options

- White Black Silver



Technical Information

OUTPUT OPTIONS		TW04	TW06	TW08
DOWN	Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
	Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
	Efficacy	20 lm/W	21 lm/W	21 lm/W
	Center Beam Candlepower	324 cd	485 cd	648 cd
UP	Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
	Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
	Efficacy	20 lm/W	21 lm/W	21 lm/W
	Center Beam Candlepower	324 cd	485 cd	648 cd

CCT	CRI	TM-30		
		R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSD-S-6FT-TW04-00-27K65K-F-N-WH-RDS-WH-AF5-CL-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT DOWN ^{1,4}	OUTPUT UP ^{1,4}	CCT	LENS DOWN ²	LENS UP ²	FINISH
VSD-WM - Vesta Dry, Suspended Up OR Down	4ft - 4 feet ⁵ 6ft - 6 feet 8ft - 8 feet 10ft - 10 feet 12ft - 12 feet XX - System ⁹	TW04 - 418 lm/ft (4.8 W/ft) ⁵ TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft) 00 - No Downlight	TW04 - 418 lm/ft (4.8 W/ft) TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft) 00 - No Uplight	27K65K - Tunable White, 2700K-6500K	F - Frosted Lens N - No Lens ³	F - Frosted Lens N - No Lens	Standard WH - White BK - Black SL - Silver

DRIVER

DRIVER OPTIONS

010S - 0-10V, 1% Dimming, 120/277V
DALI - EdoLED, DALI protocol 2, DF-6, Log, 0.1% Dimming, 120/277V
DMX - EdoLED, DMX, 0.1% Dimming, 120V/277V

NA - None
CSMB - Casambi⁶
AWN - Athena⁷
MNOD - PIR Motion Sensor, Occupancy, Daylight Harvesting⁸

1 - Select only Down or Up output. Other must be 00.
2 - Select only Down or Up Lens. Other must be N.
3 - When Down Lens is N it will receive Filler plate.
4 - Tunable White output numbers are at representative of 4000K.

5 - TW04 Output is not available with 4ft length.
6 - CSMB with 010S/DALI drivers only.
7 - AWNR contact manufacturer for build assistance - (MOD Only).
8 - MNOD contact manufacturer for build assistance - (MOD Only).
9 - Customizable configurations available, contact factory (MOD only).


CONTACT FACTORY FOR MORE OPTIONS.

VESTA


WALL MOUNT UP OR DOWN
TUNABLE WHITE LINEAR SYSTEM

Lens Down


F
Frosted Lens



AS
Asymmetric Lens




BL
Black Lens




Lens Up


F
Frosted Lens



AS
Asymmetric Lens



Cut Lengths



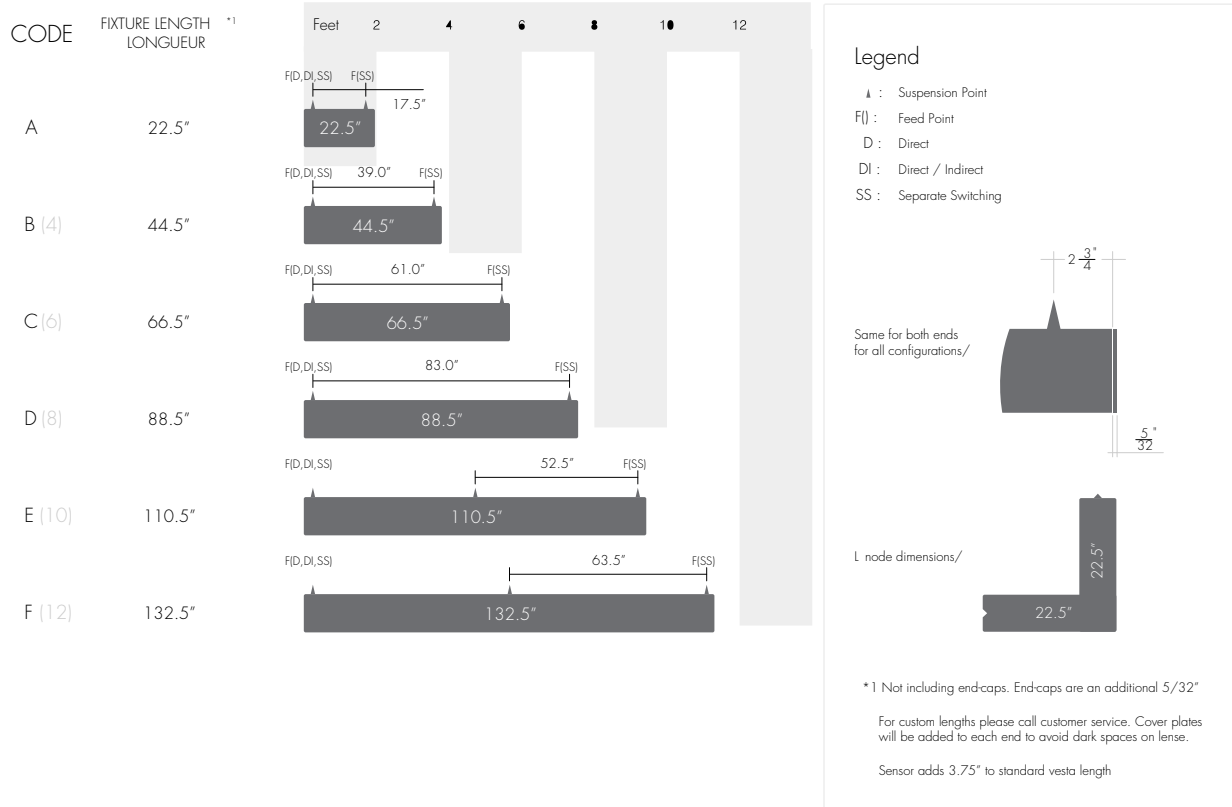


Standard Finish

BK
Black


WH
White

SL
Silver




TM-30

Tunable White 2700K

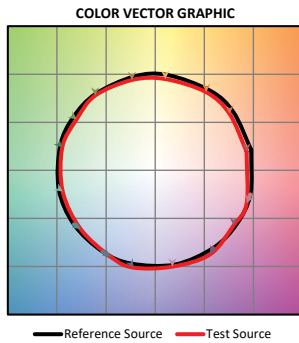

Tunable White 6500K

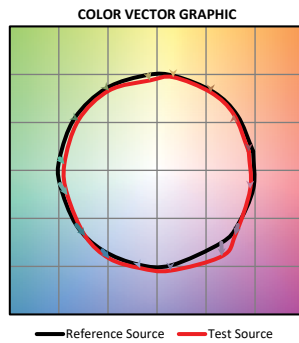

Photometry

Tunable White Down

