
	Surface Track Syster	· I I	by luminii
		Features	
	a const	 Surface Mount Track supports Stenos directional and ambient modules Minimalist and narrow track seamlessly integrates into environments Two channel track allows independent dim control for groups of modules when paired with appropriate power supplies 24 VDC Class 2 power supply 	 Snap-in Electrical Joiners include magnetic black/white Cover Plates to maintain clean aesthetic. Custom drawing and approval is required for every STENOS Track System prior to order acceptance. 4A max on track 96W max on track per power supply Dry location only Finish Options
			Black powder coatedWhite powder coated
Product Dimensions			
	0.13"	Length(not including endcaps)	
Straight Run		L Shape	
U Shape		Rectangle Shape	
Ordering Code			example: STS-R40-BK-UNV-240-XXXXXXX
0	OVERALL LENGTH ² FINISH	POWER SUPPLY ³	example: 515-8-40-bk-UINV-240-XXXXX-X WATTAGE SERIAL NUMBER

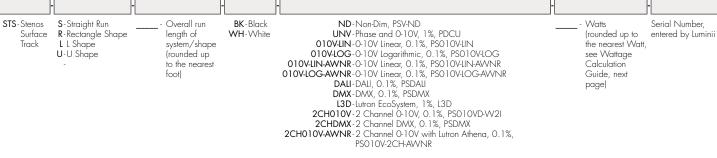



Custom drawing and approval is required for every STENOS Track System prior to order acceptance. Allow 2 weeks (typical) for custom drawing generation/confirmation process. Use STENOS Track System Sketch Grid to convey as many details as possible including: shape, dimension of each leg, desired location of power feeds, and location of track modules (Directional, Ambient, Track Heads).
 Power supplies are 120-277 VAC input, unless otherwise noted.


T: 224-333-6033


Stenos Surface Surface Track System

Product Dimensions

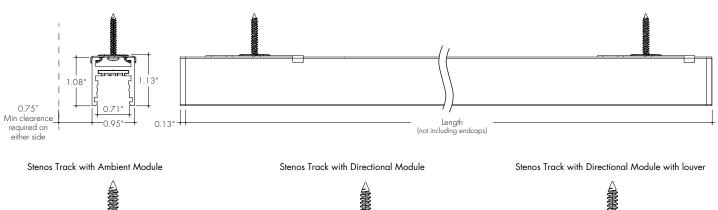







Wattage Calculation Guide

Stenos Track Module	Wattage	Lumens (3000K)	Length	Reference
STENOS 3″ Directional Module	2.6 W	250 lm	2.5 in	
STENOS 5″ Directional Module & STENOS 5″ Wall Wash Module	5.4 W	520 lm 275 lm	4.8 in	
STENOS 12" Directional Module & STENOS 12" Wall Wash Module	13.0 W	1260 lm 665 lm	11.8 in	
STENOS 1" Track Head Long 15° optic Regressed Baffle STENOS 1" Track Head Short 15° optic Regressed Baffle	6.6 W 5.2 W	565 lm 458 lm	4.9 in	
STENOS 24″ Ambient Module SO	5.5 W	475 lm	24.4 in	
STENOS 24″ Ambient Module HO	12.3 W	1000lm	24.4 in	
STENOS 48″ Ambient Module SO	11.0 W	950 lm	48.0 in	
STENOS 48″ Ambient Module HO	24.7 W	2025 lm	48.0 in	


Wattage Calculation Guide (Example)

	ଡ଼୲ଡ଼୲ଡ଼୲ଡ଼୲ଡ଼୲ଡ଼୲ଡ଼୲ଡ଼୲ଡ଼୲ଡ଼୲ଡ଼			
4W	Stenos12" Directional Module, 13.0W	Stenos 48" Ambient Module HO, 24.7W	Stenos12" Directional Module, 13.0W	4
Stenos 5° Directional Module, 5.4		4x(13.0 W) + 2x(24.7 W) + 2x(5.4W) = 112.2W Total STS-R-22-WH-ND-113*-CXXXXX * Rounded UP to the nearest Watt		irectional Module, 5.
Ste	Stenos 1 2" Directional Module, 13.0W	Stenos 48" Ambient Module HO, 24.7W	Stenos12" Directional Module, 13.0W	Ste
	0101010101010101010101010		0.000.000000000000	

www.luminii.com

Surface Track System Stenos Surface

Factory Built Sections

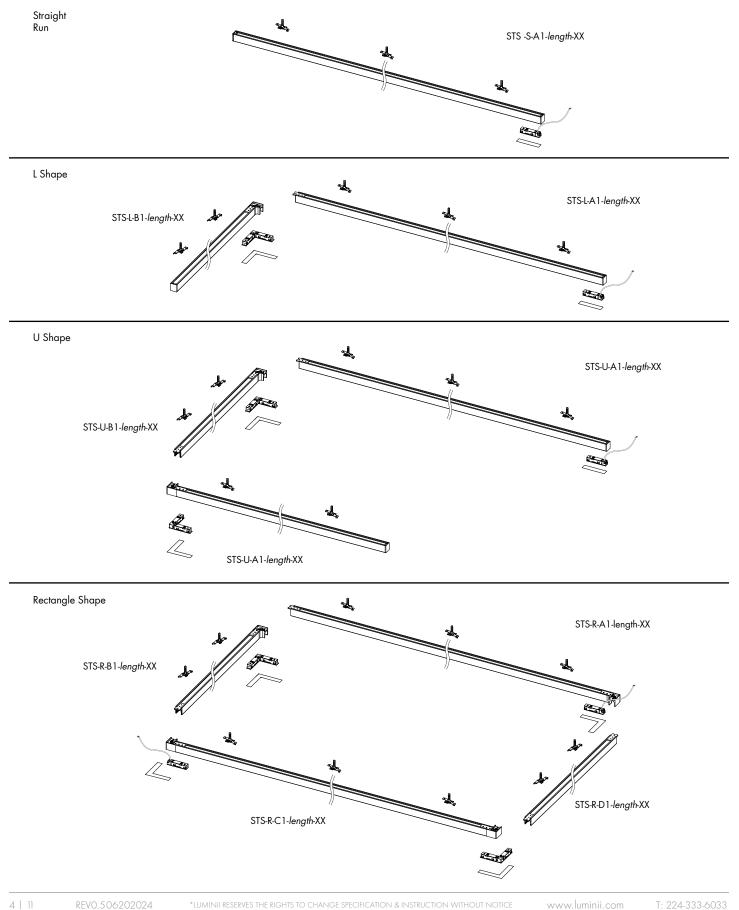

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Single Channel Control

-ND

Non-Dimming, 120-277VAC, PSV-ND-D

Length 14.40"
Width 5.20"
Depth 2.60"

-UNV

Universal, Phase (MLV/ELV/Triac) and 0-10V, 1% 120-277VAC, PDCU-W

MODELS	96W
Length	8.66"
Width	3.73"
Depth	1.61"

-010V-LIN/LOG

0-10V, 0.1% Linear/Logarithmic, 120 - 277VAC, PS010V

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

-DALI


DALI, 0.0%, 120 - 277VAC, PSDALI


Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


-DMX

DMX, 0.0%, 120 - 277VAC, PSDMX

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

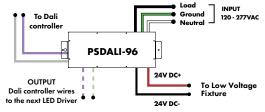

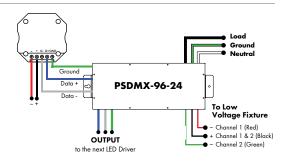

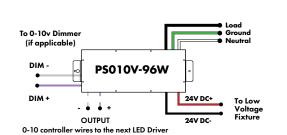

To on/off Switch

PDCU-W-96

24V DC+


24V DC-

To 0-10V Dimmer (if applicable) DIM -DIM +

To Low Voltage Fixture

Load

Ground Load

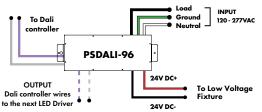

Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Two Channel Control

-2CH010V


2 CHANNEL 0-10V, 0.1% LINEAR, 120-277VAC, PS010WD-W21

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

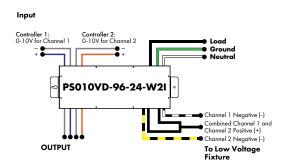


-2CHDMX 2 CHANNEL DMX, 0.0%, 120-277VAC, PSDMX

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

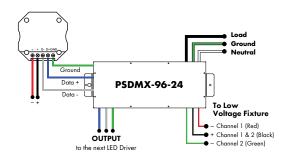


Track Components (for field configurable systems)

To minimize voltage drop, it is recommended to not exceed 24ft of track per power feed or 3 track joiners per power feed.

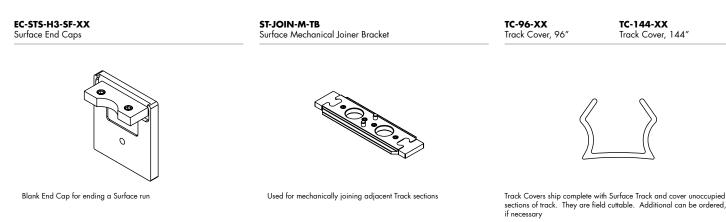

JOIN-M-L-STS-XX Surface Mechanical L Joiner




JOIN-M-W-STS-XX Surface Mechanical Wall-to-Ceiling Joiner



For creating a 90° Wall to Ceiling corner

ST-JOIN-E-P Electrical Power Feed, with black and white Cover Plates


For creating a 90° in-plane corner



For use with 18AWG field wires with max outer diameter 0.3" (cable and power feed do not ship pre-assembled)


ST-JOIN-E-S

Electrical Joiner, Straight, with black and white Cover Plates



For electrically joining adjacent Track sections


ST-JOIN-E-P-72 Electrical Power Feed, 72" Plenum Cable



(Not for concealed recessed wiring) (cable and power feed do not ship pre-assembled)

ST-JOIN-E-L

Electrical Joiner, L with black and white Cover Plates



For for use with Mechanical L Joiner

ST-JOIN-E-P-108-XX Electrical Power Feed, 108" Black/White Jacket Cable

ւրու

Color

White


Black

XX WH

ΒK

STS-48/96/144-SF-XX


Stenos Track, Surface



(Not for concealed recessed wiring) (cable and power feed do not ship pre-assembled)

ST-JOIN-E-F


Electrical Joiner, Flexible with black and white Cover Plates



For use with Mechanical L Joiner or Wall to Ceiling Joiner

Wiring and Multiple Channels

- For **single channel** use, connect black and white power feed wires.
- For two channel use, connect per wiring diagram in the Two Channel Control section of power supplies
- For Dynamic White use, connect per wiring diagram in the Dynamic White section of power supplies

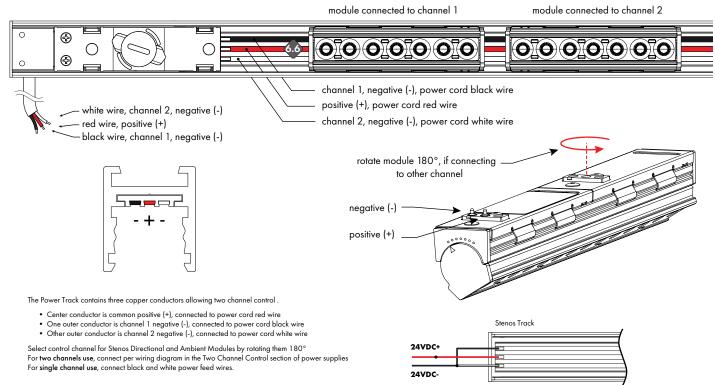

For single channel use, connect black and white wires

STENOS Track System Sketch Grid

Use grid below to sketch out details of the STENOS Track System. Include as many details as possible such as:


- Shape
- Dimensions of each leg
 Location of Power Feeds
- Location and Type of Track Modules (Directional, Ambient, Track Heads)

Note: 96W max, 24ft max, and 3 electrical joiners max per power feed See example on next page

															\neg
											 				\neg
<u> </u>											 				

Use grid below to sketch out details of the STENOS Track System. Include as many details as possible such as:

- Shape
- Dimensions of each leg
- Location of Power Feeds
- Location and Type of Track Modules (Directional, Ambient, Track Heads)

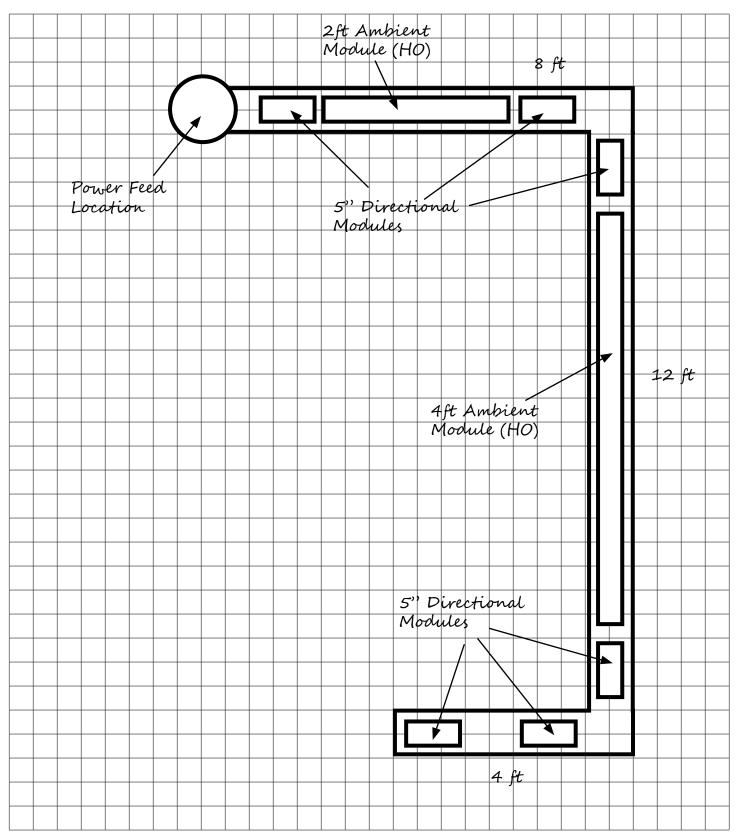

www.luminii.com



Note: 96W max, 24ft max, and 3 electrical joiners max per power feed

Additional Stenos Products



Stenos Directional Module



Stenos Directional Module with Louver

Stenos Directional Module with Wall Wash



Stenos Ambient Module

Stenos Ambient Module with Louver



