

Features

- Suitable for grazer, surface mount, architectural reveals, handrail, and accent lighting applications. and surface mount applications
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7W/ft or less
- Class 2 listed for damp locations
- Dot free even illumination with frosted lens

Finish Options (see page 3 for additional information)

• High Color Quality options offer premium quality and vibrant colors with R9 values up to 97

- High Efficacy options offer best in class output and efficacy with up to 561 lm/ft and up to 79 lm/W
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Average Life (L70): 50,000hrs
- 7 year warranty



Base Silver Anodized De Powder Coat ■ Black ■ Bronze White Premium ■ Matte Black Warm Nickel ■ Aged Brass ■ Polished Gold ■ Chrome ■ Chrome



Technical Information

MODEL	Hi	igh Color Quali	ity		High E	fficacy		High Efficacy	
OUTPUT OPTIONS	7250	72HO	72VHO	HE48LO	HE48SO	HE48MO	HE48HO	HE64VHO	
Lumens Output (3000K)	153 lm/ft	249 lm/ft	303 lm/ft	150 lm/ft	207 lm/ft	277 lm/ft	444 lm/ft	561 lm/ft	
Average Power Consumption (for a 4' section)	2.8 W/ft	4.8 W/ft	6 W/ft	1.9 W/ft	2.8 W/ft	3.5 W/ft	6.5 W/ft	7.5 W/ft	
Efficacy	55 lm/W	52 lm/W	51 lm/W	79 lm/W	74 lm/W	79 lm/W	68 lm/W	75 lm/W	
Max Run Length (in series)	40 ft	31 ft	22 ft	48 ft	42 ft	33 ft	21 ft	15 ft	
Ambient Operating Temperature Range*		-5°F – 125°F (-20°C - 50°C)				125°F - 50°C)		-5°F - 115°F (-20°C - 45°C)	

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

	High Color Quali	ty (72)					High Efficacy (HE4	8/HE64)		
667	Multiplier		тм	-30			Multiplier		тм	-30	
сст	(reference - 3000K)	CRI	Rf	Rg	Rg	ССТ	(reference - 3000K)	CRI	Rf	Rg	Rg
1900K	0.55	96	94	97	90	2200K	0.73	92	91	97	42
2200K	0.70	96	95	101	89	2500K	0.81	93	96	96	62
2400K	0.72	98	97	101	91	2700K	0.94	92	90	99	58
2700K	0.74	97	96	101	91	3000K	1.00	92	89	99	57
3000K	1.00	97	95	104	97	3500K	1.02	92	89	99	60
3500K	1.02	97	94	105	97	4000K	1.02	92	86	94	71
4100K	1.07	97	90	99	97						

Ordering Code

MODEL	LENGTH ¹	OUTPUT ²	ССТ	LENS	MOUNTING	FINISH ³			ACCESSORIES
		-	-	-			-	-	-
KM-Kendo M	12" - 144" 1" increments	72SO - Standard 72HO - High 72VHO - Very High	19K-1900K 22K-2200K 24K-2400K 27K-2700K 30K-3000K 35K-3500K 41K-4100K	GR • Narrow Beam Grazer	FC-Fixed Clip A-Adjustable Hinge Mounting FC45-Fixed Clip, 45° MAG-Magnetic	BASE SA-Silver Anodized POWDER COAT BK-Black BZ-Bronze WH-White	WIRE LEADS (72") LWE -Wire End Feed LWB -Wire Back Feed LWSA -Wire Side A Feed LWSB -Wire Side B Feed LNPF - No Power Feed	WIRE LEADS (72") RWE-Wire End Feed RWB-Wire Back Feed RWSA-Wire Side A Feed RWSB-Wire Side B Feed RNPF-No Power Feed	⁻ N/A, leave blank BLS-Blade louver, Silver BLBK-Blade louver, Black BLWH-Blade louver, White
	12" - 144" 2" increments	HE48LO-Low HE48SO-Standard HE48MO-Medium HE48HO-High HE64VHO-Very High	22K-2200K 25K-2500K 27K-2700K 30K-3000K 35K-3500K 40K-4000K			PREMIUM MBK-Matte Black WN - Warm Nickel AB-Aged Brass PG-Polished Gold ⁴ CH-Chrome ⁴	QUICK CONNECTS [4"] IFE-Female Q/C, End Feed IFB-Female Q/C, Back Feed IFSA-Female Q/C, Side A Feed IFSB-Female Q/C, Side B Feed INPF-No Power Feed	QUICK CONNECTS [4"] RFE-Female Q/C, End Feed RFB-Female Q/C, Back Feed RFSA-Female Q/C, Side A Feed RFSB-Female Q/C, Side B Feed RNPF-No Power Feed	GSS - Glare shield, Silver GSBK - Glare shield, Black GSWH - Glare shield, White

Custom lengths and increments are available, please consult Inside Sales with specific request.
 All High Efficacy options can be used to comply with Title 24 JA8. High Color Quality options can be used to comply 4 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96°.
 with Title 24 JA8 depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies. 5 - LNPF - RNPF is not a valid configuration option


1 | 12 R

www.luminii.com


Linear Illumination System

Iuminii


Powerfeeds and Connectors

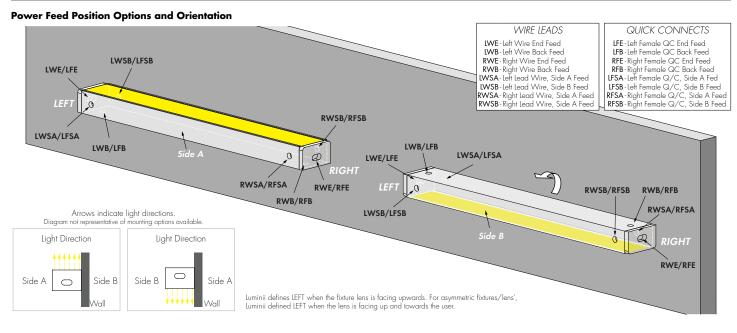

Linking and Extension Cable Options

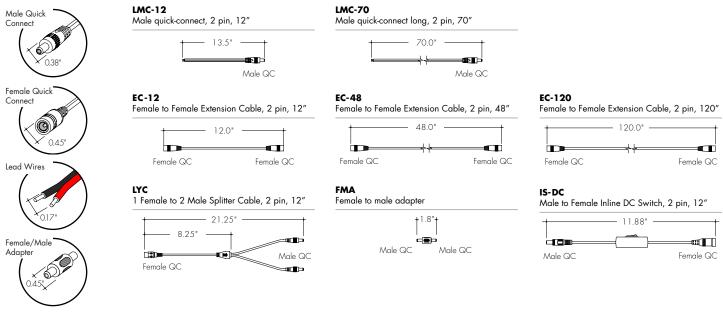


Sample Layout

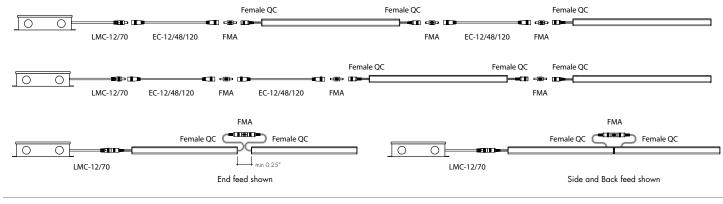

www.luminii.com

Product Dimensions

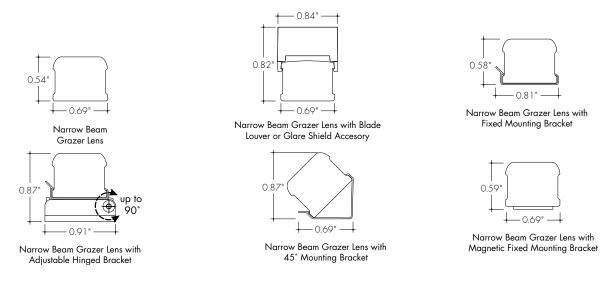

Finish Options

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic. •
- Non Base finishes may have extended lead times and price adder. •
- Polished Gold and Chrome finishes have a maximum fixture length of 96". •
- Custom RALs are available, please consult Inside Sales with specific request. •





CD - Clear DottingSD - Slight DottingND - No Dotting


Light Transmission and Dotting

						Lens/A	ccessory					
Output Options	Narı	row Bear	n Grazer	Lens	Grazer	Lens, W	hite Glare	e Shield	Grazer	Lens, Wł	nite Blade	Louver
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%
7250	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
72HO	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
72VHO	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE48LO	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE48SO	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE48MO	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE48HO	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE64VHO	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
nsmission Percentage		10	0%			88	3%			67	7%	

Accessory Options

LV-GS-KMSC-24-XX

Glare Shield reduces glare at high angle, field cuttable. Also available with complete fixture, use ordering code -GSXX



LV-BL-KMSC-24-XX

OS-DC-F4-BK

input and output.

Occupancy Sensor

Blade Louver reduces glare at high angle in two directions Also available with complete fixture, use ordering code -BLXX

0.58" **CONTRACTOR OF THE OF TH**

00

Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for

3.35"

 XX
 Color


 WH
 White

 BK
 Black

 SL
 Sllver


LVSP-4T-BK

Low Voltage, 4 Terminal Splice Box, Black



Photometry


<u>KM-48-72VHO-30K-GR</u> Kendo M, 4ft, 3000K, 72VHO, Narrow BeamGrazer Lens

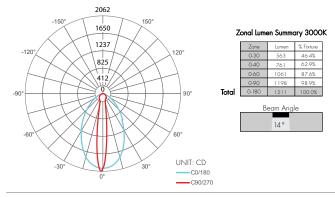



0.68





Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output.

Power Consumption

Tested at Full Power with PS-UNI Series power supplies. *For Back Feed add 4/16" (1/4") to Actual Length. Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please contact factory with specific request.

High Co	olor Que	ality (72)
---------	----------	------------

Nominal Length	End and Side Feed		Watts		Nominal Length	End and Side Feed		Watts		Nominal Length	End and Side Feed		Watts		Nominal Length	End and Side Feed		Watts	
(in)	Actual Length*	SO	НО	VHO	(in)	Actual Length*	SO	НО	VHO	(in)	Actual Length*	SO	НО	VHO	(in)	Actual Length*	SO	НО	VHO
12	11 1/16	2.7	4.4	6.2	47	46 15/16	10.5	17.4	23.1	82	81 11/16	18.3	29.5	38.4	117	116 7/16	25.9	40.8	52.4
13	12 3/16	2.7	4.4	6.2	48	-	-	-	-	83	82 13/16	18.5	29.8	38.8	118	117 9/16	26.1	41.1	52.8
14	13 6/16	2.9	4.8	6.7	49	48 2/16	10.7	17.8	23.5	84	84	18.7	30.1	39.2	119	118 12/16	26.3	41.4	53.2
15	14 8/16	3.1	5.2	7.3	50	49 4/16	11.1	18.6	24.4	85	-	-	-	-	120	119 14/16	26.5	41.7	53.6
16	15 11/16	3.4	5.6	7.8	51	50 7/16	11.4	18.9	24.9	86	85 2/16	19.2	30.8	40.0	121	-			_
17	16 13/16	3.6	6.0	8.3	52	51 9/16	11.6	19.3	25.3	87	86 5/16	19.4	31.1	40.4	122	121 1/16	26.7	42.0	54.0
18	18	3.9	6.5	8.9	53	52 12/16	11.9	19.7	25.7	88	87 8/16	19.6	31.5	40.8	123	122 3/16	27.1	42.6	54.7
19	-		-	-	54	53 14/16	12.1	20.1	26.1	89	88 10/16	19.9	31.8	41.1	124	123 6/16	27.3	42.9	55.0
20	19 2/16	4.4	7.3	9.9	55	-	-	-		90	89 13/16	20.1	32.2	41.5	125	124 8/16	27.5	43.1	55.4
21	20 5/16	4.6	7.7	10.5	56	55 1/16	12.3	20.5	26.6	91	90 15/16	20.4	32.5	41.9	126	125 11/16	27.7	43.4	55.7
22	21 7/16	4.8	8.1	11.0	57	56 3/16	12.8	21.3	27.4	92	-		-	-	127	126 13/16	27.9	43.7	56.1
23	22 10/16	5.1	8.6	11.5	58	57 6/16	13.1	21.6	27.8	93	92 2/16	20.6	32.9	42.3	128	128	28.1	43.9	56.4
24	23 13/16	5.3	9.0	12.1	59	58 8/16	13.3	22.0	28.3	94	93 4/16	21.1	33.6	43.1	129	-			-
25	24 15/16	5.6	9.4	12.6	60	59 11/16	13.6	22.4	28.7	95	94 7/16	21.3	33.9	43.4	130	129 3/16	28.5	44.5	57.1
26	-				61	60 13/16	13.8	22.8	29.1	96	95 9/16	21.5	34.2	43.8	131	130 5/16	28.7	44.7	57.4
27	26 2/16	5.8	9.8	13.1	62	62	14.0	23.1	29.6	97	96 12/16	21.8	34.6	44.2	132	131 8/16	28.9	45.0	57.8
28	27 4/16	6.2	10.5	14.1	63	-	-	-		98	97 14/16	22.0	34.9	44.6	133	132 10/16	29.1	45.3	58.1
29	28 7/16	6.5	10.9	14.5	64	63 2/16	14.5	23.8	30.5	99		-	-	-	134	133 13/16	29.3	45.5	58.4
30	29 9/16	6.7	11.2	15.0	65	64 5/16	14.7	24.1	31.0	100	99 1/16	22.2	35.2	45.0	135	134 15/16	29.5	45.7	58.7
31	30 12/16	6.9	11.6	15.5	66	65 8/16	14.9	24.4	31.4	101	100 3/16	22.5	35.9	45.9	136		-		-
32	31 14/16	7.1	12.0	16.0	67	66 10/16	15.1	24.7	31.9	102	101 6/16	22.7	36.2	46.3	137	136 2/16	29.6	45.9	59.1
33					68	67 13/16	15.3	25.0	32.4	103	102 8/16	22.9	36.5	46.7	138	137 4/16	30.0	46.3	59.7
34	33 1/16	7.3	12.3	16.5	69	68 15/16	15.5	25.4	32.8	104	103 11/16	23.1	36.8	47.1	139	138 7/16	30.2	46.5	60.0
35	34 3/16	7.8	13.1	17.4	70	-	-	-		105	104 13/16	23.3	37.1	47.5	140	139 9/16	30.3	46.8	60.3
36	35 6/16	8.0	13.4	17.9	71	70 2/16	15.8	25.7	33.3	106	106	23.5	37.4	48.0	141	140 12/16	30.5	47.0	60.6
37	36 8/16	8.2	13.8	18.4	72	71 4/16	16.2	26.3	34.2	107				-	142	141 14/16	30.7	47.2	61.0
38	37 11/16	8.4	14.2	18.9	73	72 7/16	16.4	26.6	34.7	108	107 2/16	23.9	38.1	48.8	143				-
39	38 13/16	8.7	14.5	19.3	74	73 9/16	16.6	26.9	35.1	109	108 5/16	24.1	38.4	49.2	144	143 1/16	30.8	47.4	61.3
40	40	8.9	14.9	19.8	75	74 12/16	16.8	27.3	35.5	110	109 8/16	24.3	38.7	49.6					
41			-	-	76	75 14/16	17.1	27.6	35.9	111	110 10/16	24.5	39.0	50.0					
42	41 2/16	9.3	15.6	20.7	77	_	_	_	_	112	111 13/16	24.8	39.3	50.4					
43	42 5/16	9.6	16.0	21.2	78	77 1/16	17.3	27.9	36.3	113	112 15/16	25.0	39.6	50.8					
44	43 8/16	9.8	16.4	21.7	79	78 3/16	17.7	28.5	37.2	114	-	-		-					
45	44 10/16	10.0	16.7	22.1	80	79 6/16	17.9	28.9	37.6	115	114 2/16	25.2	39.9	51.2					
46	45 13/16	10.2	17.1	22.6	81	80 8/16	18.1	29.2	38.0	116	115 4/16	25.6	40.5	52.0					

Power Consumption

Tested at Full Power with PS-UNI Series power supplies. *For Back Feed add 4/16" (1/4") to Actual Length. Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please contact factory with specific request.

										High	Effice	acy (HE	48)										
Nominal Length	End and Side Feed		W	atts		Nominal Length	End and Side Feed		W	atts		Nominal Length	End and Side Feed		W	atts		Nominal Length	End and Side Feed		W	atts	
(in)	Actual Length*	LO	so	мо	НО	(in)	Actual Length*	LO	SO	мо	НО	(in)	Actual Length*	LO	SO	МО	НО	(in)	Actual Length*	LO	SO	мо	НО
12	10 7/16	1.7	2.5	3.5	5.7	47				-		82	81 5/16	12.5	19.9	23.9	42.2	117	116 12/16	17.5	27.7	34.3	58.7
13	12 7/16	1.7	2.5	3.5	5.7	48	47 14/16	7.1	11.2	13.9	25.4	83	-		-	-	-	118	-			-	
14			-	-	-	49		-	-	-	-	84	83 5/16	12.8	20.3	24.5	43.1	119	118 12/16	17.8	28.1	34.9	59.6
15	14 6/16	2.0	3.0	4.0	7.2	50	49 13/16	7.4	11.7	14.5	26.3	85	-	-	-	-	-	120	-	-	_	-	-
16	-	-	-	-	-	51		-		-	-	86	85 4/16	13.1	20.8	25.1	44.1	121	120 11/16	18.1	28.6	35.5	60.5
17	16 6/16	2.4	3.5	4.6	8.7	52	51 13/16	7.7	12.3	15.1	27.4	87	-	-	-	-	-	122	-	-	-	-	-
18	-	-	-	-	-	53	-	-	-	-	-	88	87 4/16	13.4	21.3	25.7	45.0	123	122 11/16	18.3	29.0	36.0	62.1
19	18 5/16	2.7	3.9	5.2	10.2	54	53 12/16	8.0	12.9	15.7	28.5	89	-		-	-	-	124	-	-	-	-	-
20	-			-	-	55	-	-	-	-	-	90	89 3/16	13.7	21.7	26.3	46.0	125	124 10/16	18.4	29.5	36.6	63.8
21	20 5/16	3.0	4.4	5.8	11.7	56	55 12/16	8.4	13.5	16.4	29.5	91	-		-	-	-	126	-		-	-	-
22	-		-	-	-	57	-	-		-	-	92	91 3/16	14.0	22.1	26.9	47.0	127	126 10/16	18.6	29.9	37.2	65.4
23	22 4/16	3.4	4.9	6.4	13.2	58	57 11/16	8.7	14.0	17.0	30.6	93	-		-	-	-	128	-		-	-	-
24			-	-	-	59				-	-	94	93 2/16	14.3	22.6	27.5	47.9	129	128 9/16	18.8	30.4	37.7	67.0
25	24 4/16	3.7	5.4	7.0	14.7	60	59 11/16	9.0	14.6	17.6	31.6	95	-		-	-	-	130	-		-		-
26	-		-	-	-	61				-	-	96	95 2/16	14.4	22.8	27.8	48.4	131	130 9/16	18.9	30.8	38.3	68.6
27	26 3/16	4.1	5.9	7.5	15.8	62	61 10/16	9.4	15.2	18.2	32.6	97	-	-	-	-		132	-	-	-	-	-
28	-	-	-	-	-	63	-	-	-	-	-	98	97 1/16	14.7	23.3	28.5	49.4	133	132 8/16	19.1	31.2	38.9	70.2
29	28 3/16	4.4	6.4	8.1	16.8	64	63 10/16	9.7	15.6	18.7	33.7	99	-	-	-	-	-	134	-	-	-	-	_
30	-	-	-	-	-	65	-	-	-	-	-	100	99 1/16	15.0	23.7	29.0	50.4	135	134 8/16	19.3	31.8	39.4	70.7
31	30 2/16	4.8	6.9	8.7	17.9	66	65 9/16	10.0	16.1	19.2	34.7	101	-	-	-	-	-	136	-	-	-	-	-
32	-		-	-	-	67	-	-	-	-	-	102	101	15.3	24.1	29.6	51.3	137	136 7/16	19.5	32.3	40.0	71.2
33	32 2/16	5.0	7.2	9.0	18.5	68	67 9/16	10.4	16.5	19.8	35.7	103	103	15.6	24.6	30.2	52.3	138	-			-	-
34	-	-	-	-	-	69	-	-	-	-	-	104	-		-	-	-	139	138 7/16	19.8	32.8	40.6	71.8
35	34 1/16	5.4	7.7	9.6	19.5	70	69 8/16	10.7	17.0	20.3	36.7	105	104 15/16	15.8	25.0	30.7	53.2	140	-	-	-		_
36	-	-	-	-	-	71	-	-		-		106	-		-	-	-	141	140 6/16	20.0	33.3	41.1	72.3
37	36 1/16	5.7	8.2	10.2	20.6	72	71 8/16	11.0	17.4	20.8	37.7	107	106 15/16	16.1	25.5	31.3	54.2	142	-	-	-	_	-
38	-		-	-	-	73				-		108			-	-	-	143	142 6/16	20.2	33.9	41.7	72.8
39	38	6.0	8.7	10.8	21.5	74	73 7/16	11.3	17.9	21.4	38.7	109	108 14/16	16.4	25.9	31.9	55.2	144	-	-	-	-	-
40	40	6.2	9.2	11.4	22.3	75				-		110	-		-	-							
41	-		-	-	-	76	75 7/16	11.6	18.4	22.0	39.6	111	110 14/16	16.7	26.4	32.5	56.1						
42	41 15/16	6.4	9.7	12.0	23.1	77				-	-	112	-		-	-	-						
43	-		-	-	-	78	77 6/16	11.9	18.9	22.7	40.5	113	112 13/16	17.0	26.8	33.1	57.0						
44	43 15/16	6.7	10.2	12.6	23.9	79	-			-	-	114	-	-	-	-							
45	-	-	-	-	-	80	79 6/16	12.2	19.4	23.3	41.4	115	114 13/16	17.3	27.3	33.7	57.9						
46	45 14/16	6.9	10.7	13.3	24.7	81	-	-	-	-	-	116	-	-	-	-	-						

Power Consumption

Tested at Full Power with PS-UNI Series power supplies. *For Back Feed add 4/16" (1/4") to Actual Length. Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please contact factory with specific request.

				Hig	gh Effic	acy (HE64)					
Nominal Length (in)	End and Side Feed Actual	Watts	Nominal Length (in)	End and Side Feed Actual	Watts	Nominal Length (in)	End and Side Feed Actual	Watts	Nominal Length (in)	End and Side Feed Actual	Watts
	Length*	VHO	g()	Length*	VHO	9()	Length*	VHO	9()	Length*	VHO
12	11 4/16	7.6	47	46 1/16	28.2	82	_	-	117	-	-
13	12 12/16	7.6	48	47 9/16	29.5	83	82 6/16	51.7	118	117 4/16	72.8
14	-	-	49	-	-	84	83 15/16	52.3	119	118 12/16	73.3
15	14 4/16	8.9	50	49 1/16	30.1	85	-	-	120	-	-
16	15 12/16	9.5	51	50 10/16	31.4	86	85 7/16	53.6	121	120 4/16	74.4
17	-		52	-		87	86 15/16	54.2	122	121 12/16	74.8
18	17 5/16	10.7	53	52 2/16	32.0	88	-	-	123	-	-
19	18 13/16	11.4	54	53 10/16	33.3	89	88 7/16	55.5	124	123 4/16	75.6
20	-	-	55	-	-	90	89 15/16	56.2	125	124 13/16	76.0
21	20 5/16	12.6	56	55 2/16	34.0	91	_	-	126	-	-
22	21 13/16	13.2	57	56 10/16	35.2	92	91 8/16	57.5	127	126 5/16	76.8
23	_	-	58	_	-	93	93	58.2	128	127 13/16	77.2
24	23 5/16	14.5	59	58 3/16	36.5	94	-	-	129	-	-
25	24 14/16	15.1	60	59 11/16	37.2	95	94 8/16	59.5	130	129 5/16	78.0
26	-		61	-		96	-		131	130 14/16	78.4
27	26 6/16	16.4	62	61 3/16	38.4	97	96	60.1	132	-	-
28	27 14/16	17.0	63	62 11/16	39.1	98	97 9/16	61.4	133	132 6/16	79.2
29	-	-	64	-		99	-	-	134	133 14/16	79.6
30	29 6/16	18.2	65	64 4/16	40.4	100	99 1/16	62.0	135	-	-
31	30 15/16	18.9	66	65 12/16	41.0	101	100 9/16	63.2	136	135 6/16	80.3
32	_	-	67	_	-	102	-	-	137	136 14/16	80.6
33	32 7/16	20.1	68	67 4/16	42.3	103	102 1/16	63.8	138	-	-
34	33 15/16	20.7	69	68 12/16	42.9	104	103 10/16	65.0	139	138 7/16	81.3
35	_	-	70	_		105	-	-	140	139 15/16	81.7
36	35 7/16	22.0	71	70 5/16	44.2	106	105 2/16	65.6	141		-
37	37	22.6	72	71 13/16	44.9	107	106 10/16	66.8	142	141 7/16	82.4
38	_	-	73	_	-	108	-	-	143	142 15/16	82.7
39	38 8/16	23.9	74	73 5/16	46.1	109	108 2/16	67.4	144	-	-
40	40	24.5	75	74 13/16	46.7	110	109 10/16	68.5			
41	-	-	76	-		111			_		
42	41 8/16	25.7	77	76 5/16	48.0	112	111 3/16	69.6	_		
43	-	-	78	77 14/16	48.6	113	112 11/16	70.1	-		
44	43	26.4	79	_		114	_		-		
45	44 9/16	27.6	80	79 6/16	49.8	115	114 3/16	71.2	-		
46	_		81	80 14/16	50.4	116	115 11/16	71.7	-		

High Efficacy (HE64)

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage		,	Wire Length Fror	n Power Supply	to Start of Run [ft]	
[W]	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

PS-UNI-W-3X96W

11.85"

4.32"

1.81"

PS-UNI-D-3X96W

9.94"

7.61"

2.02"

Power Supplies

MODELS

Length

Width

Depth

MODELS

Length

Width

Depth

PS-UNI-W-30W

6.50"

3.73″

1.61″

PS-UNI-D-30W

8.77″

4.27"

1.83"

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code Universal Dimming Power Supplies 1% 120VAC - 277VAC

PS-UNI-W-60W

7.40"

3.73″

1.61″

PS-UNI-D-60W

8.77″

4.27"

1.83"

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
	-			-
PS- Power Supply, 120-277VAC	UNI-0-10V Dimming, Phase Dimming	D-Dry W-Wet	30-30 Watts 60-60 Watts 96-96 Watts 3x96-3x96 Watts	24-24 VDC
Compatibility: View a complet page (<u>Link</u>)	te list of compatible dimmers on product	0-10V - 1% dimming MLV/ELV/TRIAC - 1%	dimming, consult dimming co	mpatibility chart

PS-UNI-W-96W

8.66"

3.73"


1.61"

PS-UNI-D-96W


8.11″

5.60"


1.83"

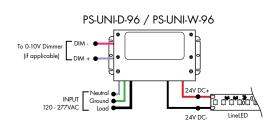


PS-UNI-D-3X96 / PS-UNI-W-3X96

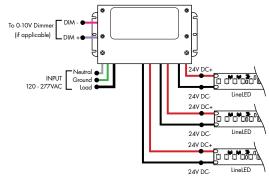

Ordering Code 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

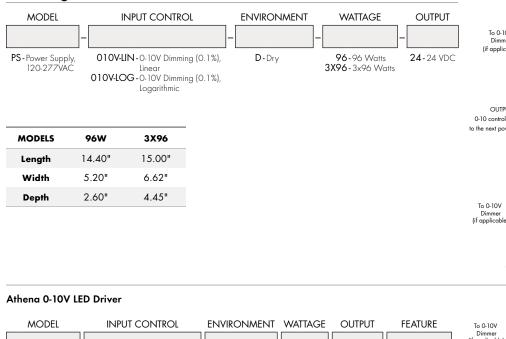

PS-010V-LIN/LOG-D-3X96

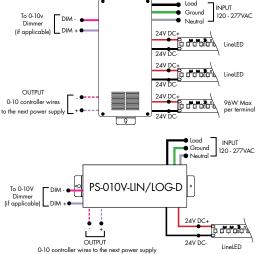

www.luminii.com

MODEL	INPL	JT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE	To 0-10V DIM -		
	-		-	-	-	-	(if applicable) DIM +	ATHENA	·
PS- Power Supply, 120-277VAC		IN-0-10V Dimming, Linear G-0-10V Dimming, Logarithmic	D -Dry	96- 96 W	24-24 VDC	AWNR-Athena	0-10 controller wires to th		24V DC+ 24V DC- 24V DC- LineLED
MODELS	96W								
Length	14.40"								
Width	5.20"								
Depth	2.60"	_							


Load
 Ground


INPUT 120 - 277VAC

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code DALI1 Dimming Power Supplies 0.1% 120VAC - 277VAC

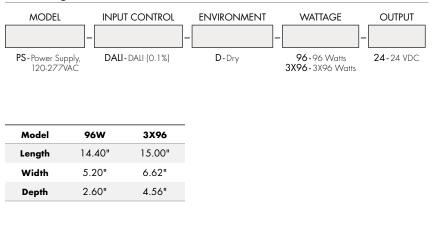

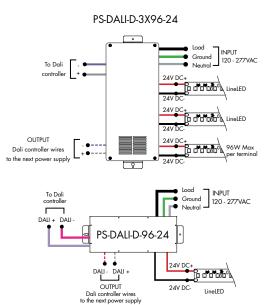

Ordering Code DMX Dimming Power Supplies 0.1% 120VAC - 277VAC Requires Zonal Control

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
	-		-	-
PS -Power Supply, 120-277VAC	DMX- DMX (0.1%)	D-Dry	96-96 Watts 3X96-3X96 Watts	24-24 VDC


*Zonal control power supplies. Control multiple tapes/zones using DMX channels.

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

PS-DMX-D-3X96-24 INPUT DMX Ground 120 - 277VAC DMX -To Cont Neutra DMX CABLES LineLED (FOR DMX CABLES, USE BELDEN 9829, 9842 OR CAT5 SHIELDED TWISTED PAIR LineLED CABLING OR EQUIVALENT DMX to the next 24V I DMX n mmnhh 96W Max power supply per termina shield DMX CABLES (FOR DMX CABLES, USE BEIDEN 9829, 9842 OR CAT5 SHIELDED TWISTED PAIR CABLING OR EQUIVALENT) SHIELD to the nex LED SYNC THRU LED SYNC THRU r supply PS-DMX-D-96-24 DMX IN SHIELD o DMX controlle 000 24V DC LineLED INPUT 120 - 277VAC

www.luminii.com

Ordering Code Enlighted Enabled Dimming Power Supplies 1% 120VAC - 277VAC

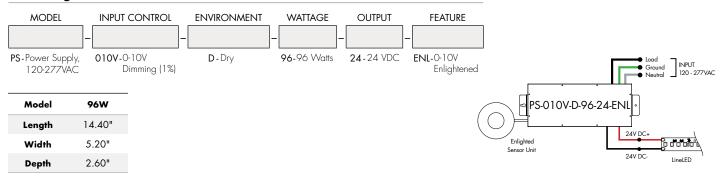




Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code Non-Dimming Power Supply 120VAC - 277VAC

MODEL	. 1	NPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
	-	-			-
PS- Power St 120-277		ND-Non Dimming	D - Dry	96- 96 Watts	24-24 VDC
120-277	VAC				
		_			
MODELS	96W				
Length	14.40"				
Width	5.20"				
Depth	2.60"				



Orderina Code Phase Dimming Power Supply 1% 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	OUTPUT CONTROL		PS-PH-D-96-24-DC	
	-	-	-	-	-]
PS -Power Supply, 120-277VAC	PH-Phase Dimming (Triac, ELV, MLV)	D-Dry	96 -96 Watts	24-24 VDC	DC-Direct Current	INPUT 120 - 277VAC		24V DC+ 24V DC- LineLED
MLV/ELV/TRIAC - 1% dimming, consult dimming compatibility chart (Link)					Load	NOT OVER THE WHITE, GREEI CONNECT TO ELV	N, AND BLACK WIRES,	

MODELS	96W
Length	8.25"
Width	4.10"
Depth	1.56"

Width

Depth

8.30" 8.10"

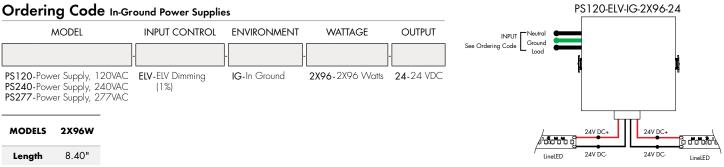



Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

SLUTRON.


Luminii is a Lutron OEM Advantage Partner Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

Hi-lume™ 1% EcoSystem Voltage LED driver 40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"



②LUTRON。

Luminii is a Lutron OEM Advantage Partner Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

Hi-lume $^{\rm TM}$ 0.1 % EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black $^{\rm TM}$ 96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

