



Features

- Constant voltage output
- Input Voltage, 120-277VAC
- Compatible with 0-10V Dimmers
- Flicker-free dimming
- Cooling by free air convection
- Full protection metal case
- Auto reset breakers, from short circuit, overloading, & over temperature
- Load 10 – 100%
- Dry location (IP20)
- 5 year Warranty

Patent Number
US10278251B1



IP20

Technical Information

Input voltage

120-277V AC, 1.1A, 50/60Hz

Output signal

24 VDC, 4.0 A

Maximum wattage

96 watt circuits

Dimming curve

Linear, 100% - 0% (HydraDrive)

Mounting

Surface mounted with conduit access

Ambient Operating Temperature


-20C to +35C

Weight


3.8 lbs

Diming Options

WW	0-10V (dimmer needs to be capable to dim to 0% without ON/OFF switch)
W2C	Standard Two Channel: Dim 1: Intensity; Dim 2: CCT

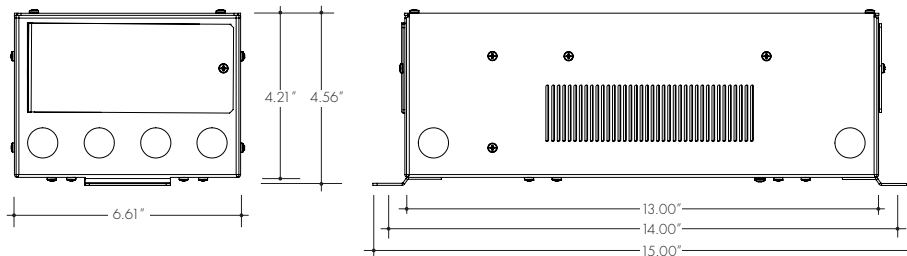

Wiring Diagram

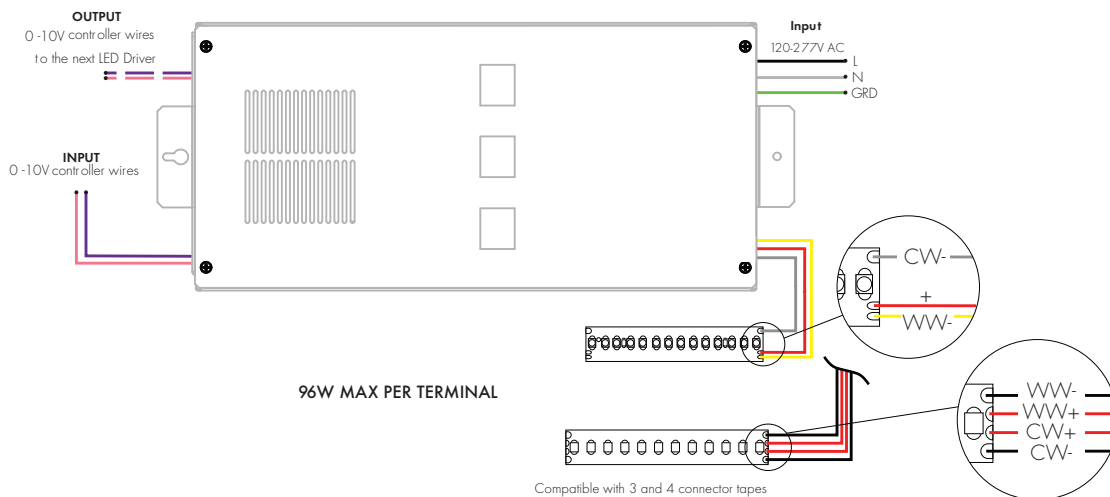

Ordering Code

MODEL	POWER	OUTPUT	CONTROL TYPE
PS010VD-0-10V VintageDim® LED Driver	3X96 - 3 x 96 W	24 - 24 VDC	W2C - Standard Two Channel: Dim 1: Intensity; Dim 2: CCT WW - Standard One Channel - Dim to Warm Curve