




**Features**

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 90' depending on output
- Suitable for undercabinet, surface mount, and direct view applications
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7 W/ft or less
- Class 2 listed for damp locations
- Dot free even illumination with frosted lens
- Average Life (L70): 50,000hrs
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Vibrant Color options offer premium quality and vibrant colors with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with over 890 lm/ft and up to 105 lm/W
- 7 Year warranty

**Finish Options** (see page 3 for additional information)

- Powder Coat**     Black     Bronze     White
- Premium**     Matte Black     Warm Nickel     Aged Brass
- Polished Gold     Chrome



**Technical Information**

TYPE	Vibrant Color VC72							
OUTPUT OPTIONS	VC72VLO	VC72LO	VC72SO	VC72MO	VC72HO	VC72VHO	VC72XHO	
<b>Lumens Output (3000K)</b> <small>(with a Frosted Lens)</small>	84 lm/ft	213 lm/ft	284 lm/ft	375 lm/ft	453 lm/ft	603 lm/ft	719 lm/ft	
<b>Average Power Consumption</b> <small>(for a 4" section)</small>	1.1 W/ft	2.8 W/ft	3.7 W/ft	4.9 W/ft	5.9 W/ft	7.9 W/ft	9.9 W/ft	
<b>Efficacy</b>	76 lm/W	76 lm/W	77 lm/W	77 lm/W	77 lm/W	76 lm/W	73 lm/W	
<b>Max Run Length</b> <small>(in series)</small>	56.9 ft	32 ft	28 ft	24 ft	21 ft	18 ft	12 ft	
<b>Ambient Operating Temperature Range*</b>	-4°F - 122°F (-20°C - 50°C)					-4°F - 95°F (-20°C - 35°C)	-4°F - 77°F (-20°C - 25°C)	

\*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

CCT	Multiplier <small>(ref. - 30K)</small>	TM-30		
		CRI	R <sub>f</sub>	R <sub>g</sub> R <sub>9</sub>
1800K	0.50	95	94	99 86
2200K	0.66	96	94	101 95
2400K	0.90	98	96	101 91
2700K	0.93	98	96	102 93
3000K	1.00	97	94	104 99
3500K	1.04	96	94	105 97
4100K	1.05	97	95	104 96

TYPE	High Efficacy HE64							
OUTPUT OPTIONS	HE64VLO	HE64LO	HE64SO	HE64MO	HE64HO	HE64VHO	HE64XHO	
<b>Lumens Output (3000K)</b> <small>(with a Frosted Lens)</small>	93 lm/ft	200 lm/ft	287 lm/ft	381 lm/ft	542 lm/ft	742 lm/ft	894 lm/ft	
<b>Average Power Consumption</b> <small>(for a 4" section)</small>	1 W/ft	1.9 W/ft	2.9 W/ft	3.8 W/ft	5.6 W/ft	7.1 W/ft	8.9 W/ft	
<b>Efficacy</b>	93 lm/W	105 lm/W	99 lm/W	100 lm/W	97 lm/W	105 lm/W	100 lm/W	
<b>Max Run Length</b> <small>(in series)</small>	90 ft	55 ft	34.9 ft	26 ft	17 ft	13 ft	10.3 ft	
<b>Ambient Operating Temperature Range*</b>	-4°F - 122°F (-20°C - 50°C)					-4°F - 104°F (-20°C - 40°C)	-4°F - 86°F (-20°C - 30°C)	

\*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

CCT	Multiplier <small>(ref. - 30K)</small>	TM-30		
		CRI	R <sub>f</sub>	R <sub>g</sub> R <sub>9</sub>
2200K	0.74	94	91	96 65
2400K	0.87	94	92	97 56
2700K	0.97	94	92	100 57
3000K	1.00	93	91	99 54
3500K	1.01	95	91	99 62
4000K	1.04	95	91	99 68


**Ordering Code**

MODEL	LENGTH <sup>1</sup>	OUTPUT <sup>2</sup>	CCT	LENS	MOUNTING	FINISH <sup>3</sup>	FEED POSITION LEFT <sup>4</sup>	FEED POSITION RIGHT <sup>4</sup>	ACCESSORIES <sup>5</sup>
Bar-BABA - Bara BABA	12"-144" 1" increments	VC72VLO - Very Low VC72LO - Low VC72SO - Standard VC72MO - Medium VC72HO - High VC72VHO - Very High VC72XHO - Extreme	18K - 1800K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	F - Frosted N - Narrow Beam M - Medium BW - Batwing AS - Asymmetric <sup>6</sup>	FC - Fixed Clip MAG - Magnetic <sup>6</sup>	<b>POWDER COAT</b> BK - Black <sup>7</sup> BZ - Bronze WH - White <sup>7</sup>	<b>PLENUM WIRE LEADS (72")</b> LPE - Plenum Wire End Feed LPB - Plenum Wire Back Feed LNPF - No Power Feed	<b>PLENUM WIRE LEADS (72")</b> RPE - Plenum Wire End Feed RPB - Plenum Wire Back Feed RNPF - No Power Feed	--- - N/A, leave blank BLBK - Blade louver, Black BLWB - Blade louver, White GSBK - Glare shield, Black GSWB - Glare shield, White
	12"-144" 2" increments	HE64VLO - Very Low HE64LO - Low HE64SO - Standard HE64MO - Medium HE64HO - High HE64VHO - Very High HE64XHO - Extreme	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K			<b>PREMIUM</b> MBK - Matte Black WN - Warm Nickel AB - Aged Brass PG - Polished Gold <sup>8</sup> CH - Chrome <sup>8</sup>	<b>QUICK CONNECTS (4")</b> LFE - Female Q/C, End Feed LFB - Female Q/C, Back Feed LNPF - No Power Feed	<b>QUICK CONNECTS (4")</b> RFE - Female Q/C, End Feed RFB - Female Q/C, Back Feed RNPF - No Power Feed	

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.  
 2 - Title 24 JAB achievable depending on Output, CCT, and lens selections. See multiplier charts to calculate specific efficacies.  
 3 - Finishes may have extended lead times. Custom RAIs are available, please consult Inside Sales with specific request.  
 4 - LNPF - RNPF is not a valid configuration option  
 5 - Louver Accessories are not compatible with Asymmetric lens.  
 6 - Magnetic mounting option is not compatible with the louvers.  
 7 - Black or White finish must be selected when ordering a louver or glare shield. See lens options on page 3.  
 8 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96".




**Product Dimensions**

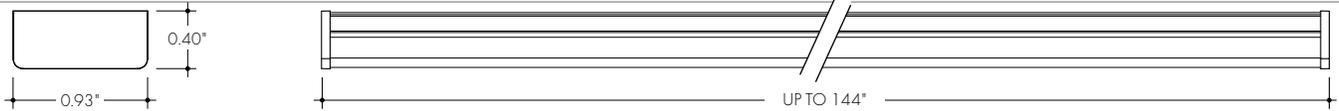


**Mounting Clip Details**

FC  
Fixed Clip

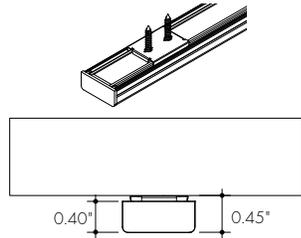


MAG  
Magnetic Clip

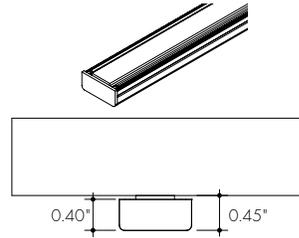


**Lens Options**

F  
Frosted Lens




N  
Narrow Beam Lens




M  
Medium Lens




BW  
Batwing Lens




AS  
Asymmetric Lens



BLXX  
Blade Louver (frosted lens shown)



GSXX  
Glare Shield (frosted lens shown)



XX	Color
BK	All Black
WB	White Exterior, Black Interior

**Finish Options**

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Finishes may have extended lead times.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.
- Narrow, Medium, Batwing, and Asymmetric lens offerings will always come with a white finish on the front reflector.

**Black**  
Powder Coat



Black is a true deep black with a glossy finish.

**Bronze**  
Powder Coat



Bronze is a rich, dark brown with a satin finish.

**White**  
Powder Coat



White is a polar bright white and field paintable.

**Matte Black**  
Premium



Matte Black is a dark, pitch-black with a soft flat finish.

**Warm Nickel**  
Premium



Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

**Aged Brass**  
Premium



Aged Brass is a deep brown shade with slightly golden undertones.

**Polished Gold**  
Premium



Polished Gold is bright and radiant for a brilliant finish.

**Chrome**  
Premium



Chrome is a highly reflective silver polish.

**Black with Narrow Beam**



NOTE: Either a white finish or louver/glare shield is recommended with these lens options.

Light Transmission and Dotting

Output Options	Lens/Accessory																			
	Frosted Lens				Narrow Beam Lens				Medium Lens				Batwing Lens				Asymmetric Lens			
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%
VC72VLO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
VC72LO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
VC72SO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
VC72MO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
VC72HO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
VC72VHO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
VC72XHO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE64VLO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE64LO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE64SO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE64MO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE64HO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE64VHO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
HE64XHO	ND	ND	ND	ND	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD	CD
<b>Transmission Percentage</b>	100%				96%				87%				114%				86%			
<b>Transmission Percentage With Blade Louver</b>	39%				53%				46%				46%				Not Compatible			
<b>Transmission Percentage With Glare Shield</b>	54%				73%				66%				64%				Not Compatible			

Use complete Dotting Chart Tool online for more dotting information




CD - Clear Dotting  
SD - Slight Dotting  
ND - No Dotting

Accessory Options

**LV-BL-BARC-24-XX**


Blade Louver reduces glare at high angle in two directions. Also available with complete fixture, use ordering code **-BLXX**

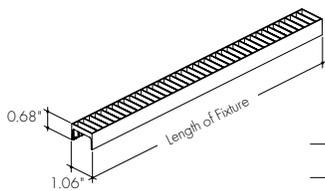

XX	Color
BK	All Black
WB	White Exterior, Black Interior


**LV-GS-BARC-24-XX**

Glare Shield reduces glare at high angle, field cuttable. Also available with complete fixture, use ordering code **-GSXX**

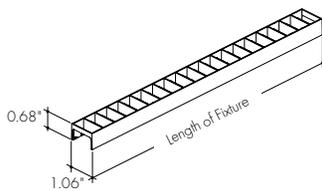


**LVSP-4T-BK**

Low Voltage, 4 Terminal Splice Box, Black, IP20

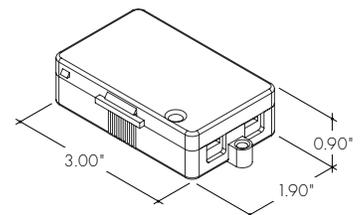

**OS-DC-F4-BK**


Occupancy Sensor

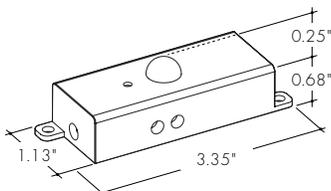

Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output.

**DIM-DC-F4-BK**



24VDC Low Voltage In-line Dimmer Module

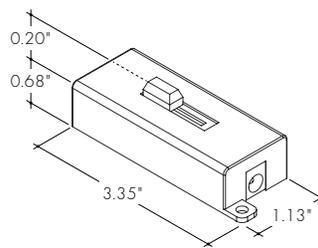

Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output.

**NL.EX.D1.B & NL.EX.D3.B**

Near Infrared Remote Door Sensor

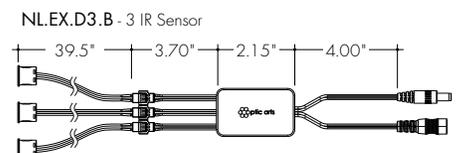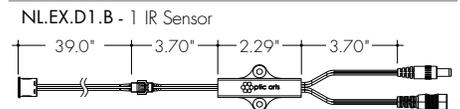


Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output. For more information visit Sensor Spec Sheet [\(Link\)](#)

Photometry

**BAR-48-72VHO-30K-F**

Bara, 4ft, 3000K, VHO, Frosted Lens

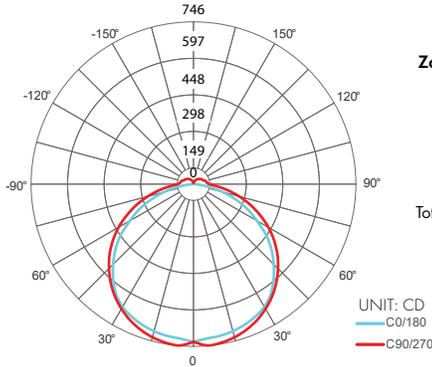


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	145	24%
0-40	241	40%
0-60	436	72%
0-90	570	95%
<b>Total</b>	<b>603</b>	<b>100%</b>



**BAR-48-72VHO-30K-N**

Bara, 4ft, 3000K, VHO, Narrow Beam

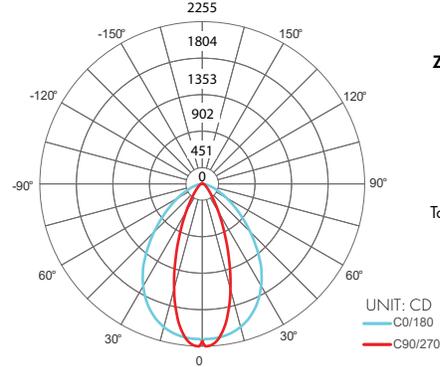


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	296	51%
0-40	404	70%
0-60	529	91%
0-90	575	99%
<b>Total</b>	<b>581</b>	<b>100%</b>



**BAR-48-72VHO-30K-M**

Bara, 4ft, 3000K, VHO, Medium Lens

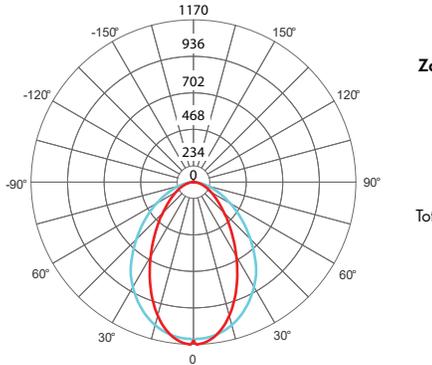


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	195	37%
0-40	294	56%
0-60	446	85%
0-90	519	99%
<b>Total</b>	<b>524</b>	<b>100%</b>



**BAR-48-72VHO-30K-BW**

Bara, 4ft, 3000K, VHO, Batwing Lens

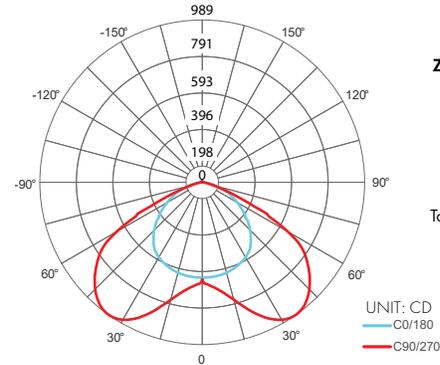


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	142	21%
0-40	258	38%
0-60	530	77%
0-90	680	99%
<b>Total</b>	<b>687</b>	<b>100%</b>



**BAR-48-72VHO-30K-AS**

Bara, 4ft, 3000K, VHO, Asymmetric Lens

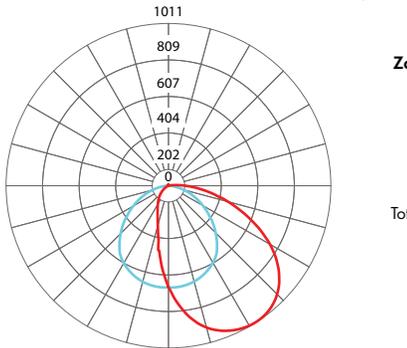

**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	121	23%
0-40	203	39%
0-60	378	73%
0-90	511	98%
<b>Total</b>	<b>520</b>	<b>100%</b>



**Power Consumption**

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, output, and desired power feed to get a full power consumption table.



I'm also click-able

Desired Nominal Length: \_\_\_\_\_

Desired Output: \_\_\_\_\_

Desired CCT: \_\_\_\_\_

**Voltage Drop Calculator**

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

## Power Supplies



See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White

#### Ordering Code - Dimming Power Supplies 1% 120VAC - 277VAC

MODEL	WATTAGE	OUTPUT	INPUT
PSD-PSD Series	48 - 48 Watts 96 - 96 Watts 288 - 288 Watts	24 - 24 VDC	Blank - 120 VAC 277 - 277 VAC

MODELS	PSD-48-24	PSD-96-24	PSD-288-24
<b>Length</b>	11.25"	11.25"	13.06"
<b>Width</b>	3.42"	3.42"	8.42"
<b>Depth</b>	3.24"	3.27"	4.47"

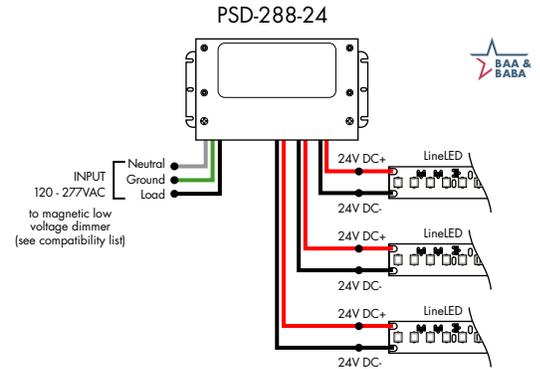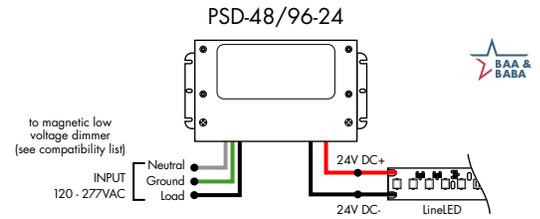

### For use with Static White



#### Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming  
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
<b>Length</b>	6.50"	7.40"	8.66"	11.85"
<b>Width</b>	3.73"	3.73"	3.73"	4.32"
<b>Depth</b>	1.61"	1.61"	1.61"	1.81"

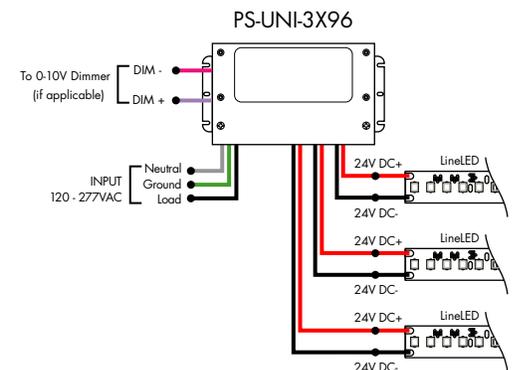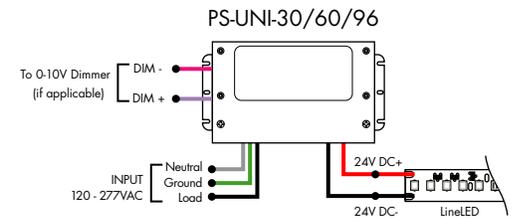

## Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White


#### Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC
	010V-LOG - 0-10V Dimming (0.1%), Logarithmic			

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

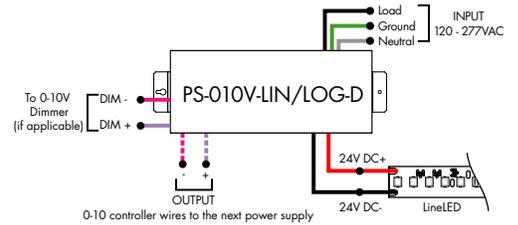

PS-010V-LIN/LOG-D-3X96

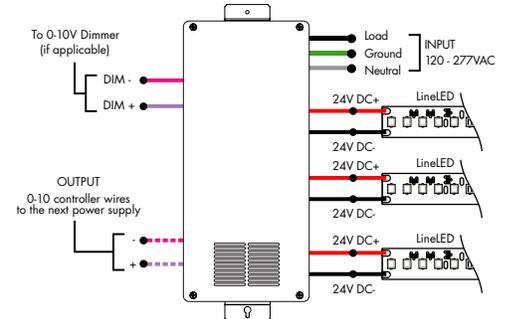


### For use with Static White

#### Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear	D-Dry	96-96 Watts	24-24 VDC	AWN-R - Athena
	010V-LOG - 0-10V Dimming (0.1%), Logarithmic				

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

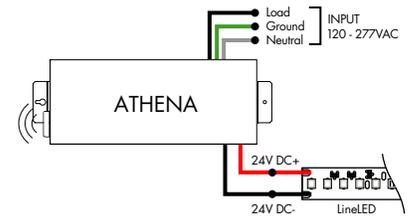


### For use with Static White


#### Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

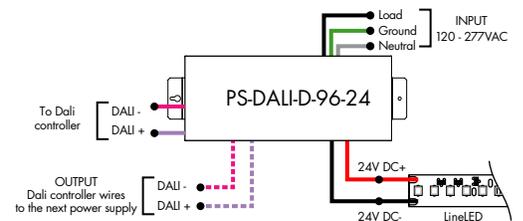

PS-DALI-D-3X96-24

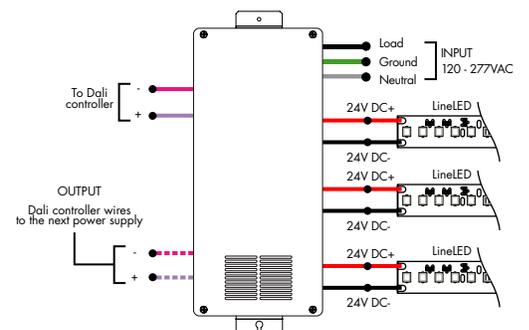

## Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White

#### Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI2-DT6-DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24-24 VDC

<b>Model</b>	<b>96W</b>
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

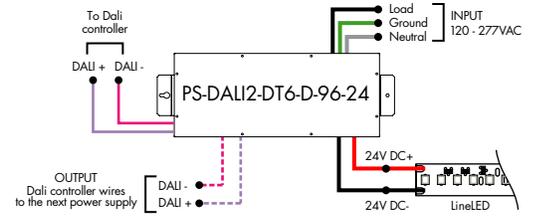



### For use with Static White

#### Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
<b>Length</b>	14.40"	15.00"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.56"

ZONAL CONTROL POWER SUPPLIES.  
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

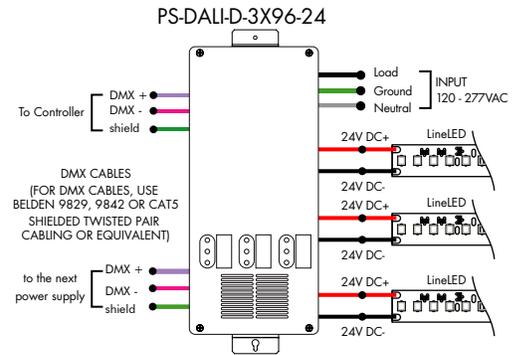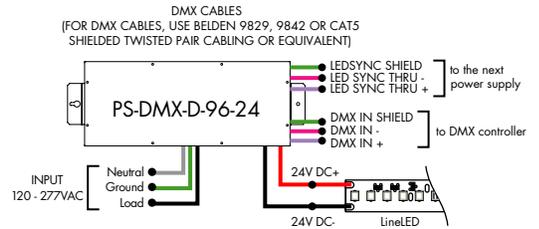


### For use with Static White

#### Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

<b>MODELS</b>	<b>96W</b>
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

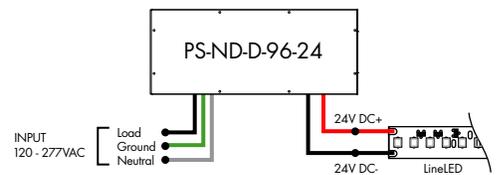

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.


### For use with Static White

#### Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120 - Power Supply, 120VAC PS240 - Power Supply, 240VAC PS277 - Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

#### MODELS 2X96W

<b>Length</b>	8.40"
<b>Width</b>	8.30"
<b>Depth</b>	8.10"

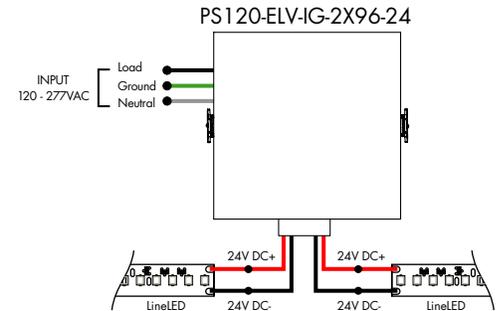

Luminii is a Lutron OEM Advantage Partner

#### Lutron Power Supplies 1%


##### MODEL

**L3DA4U1UKL-CV240**

HiLume™ 1% EcoSystem Voltage LED driver 40W max

#### MODELS L3DA4U1UKL-CV240

<b>Length</b>	4.98"
<b>Width</b>	4.00"
<b>Depth</b>	2.62"

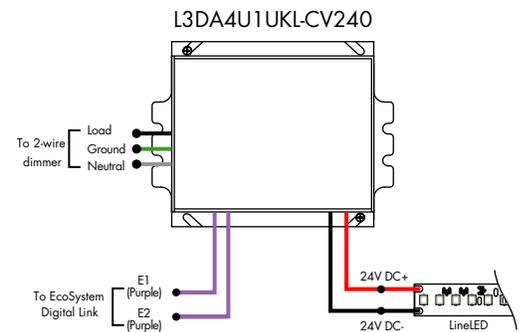

Luminii is a Lutron OEM Advantage Partner

#### Lutron Power Supplies 0.1%

##### MODEL

**L3D0-96W24V-U**

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

#### MODELS L3D0

<b>Length</b>	10.50"
<b>Width</b>	5.50"
<b>Depth</b>	2.00"

