

Features

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 90' depending on output
- Suitable for undercabinet, millwork, direct view, grazer, cove, direct view, architectural reveals, accent lighting and surface mount applications
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7W/ft or less
- Class 2 listed for damp locations
- Dot free even illumination with frosted lens
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Vibrant Color options offer premium color quality with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with over 930 lm/ft and up to 132 lm/W
- Average Life (L70): 50,000hrs
- 7 Year warranty

Finish Options (see page 3 for additional information)

- Powder Coat** Black Bronze White
- Premium** Matte Black Warm Nickel Aged Brass
- Polished Gold Chrome



Technical Information

TYPE	Vibrant Color VC72					
OUTPUT OPTIONS	VC72VLO	VC72LO	VC72SO	VC72MO	VC72HO	VC72VHO
Lumens Output (3000K) <small>(with a Clear lens)</small>	105 lm/ft	268 lm/ft	357 lm/ft	471 lm/ft	570 lm/ft	759 lm/ft
Average Power Consumption <small>(for a 4' section)</small>	1.1 W/ft	2.8 W/ft	3.7 W/ft	4.9 W/ft	5.9 W/ft	7.9 W/ft
Efficacy	95 lm/W	96 lm/W	96 lm/W	96 lm/W	97 lm/W	96 lm/W
Max Run Length <small>(in series)</small>	56.9 ft	32 ft	28 ft	24 ft	21 ft	18 ft
Ambient Operating Temperature Range*	-4°F - 122°F (-20°C - 50°C)				-4°F - 95°F (-20°C - 35°C)	

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

TYPE	High Efficacy HE64					
OUTPUT OPTIONS	HE64VLO	HE64LO	HE64SO	HE64MO	HE64HO	HE64VHO
Lumens Output (3000K) <small>(with a Clear lens)</small>	116 lm/ft	251 lm/ft	360 lm/ft	479 lm/ft	681 lm/ft	934 lm/ft
Average Power Consumption <small>(for a 4' section)</small>	1 W/ft	1.9 W/ft	2.9 W/ft	3.8 W/ft	5.6 W/ft	7.1 W/ft
Efficacy	116 lm/W	132 lm/W	124 lm/W	126 lm/W	122 lm/W	132 lm/W
Max Run Length <small>(in series)</small>	90 ft	55 ft	34.9 ft	26 ft	17 ft	13 ft
Ambient Operating Temperature Range*	-4°F - 122°F (-20°C - 50°C)				-4°F - 113°F (-20°C - 45°C)	

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

CCT	Multiplier <small>(ref. - 30K)</small>	TM-30		
		CRI	R _f	R _g R ₉
1800K	0.50	95	94	99 86
2200K	0.66	96	94	101 95
2400K	0.90	98	96	101 91
2700K	0.93	98	96	102 93
3000K	1.00	97	94	104 99
3500K	1.04	96	94	105 97
4100K	1.05	97	95	104 96

CCT	Multiplier <small>(ref. - 30K)</small>	High Efficacy (HE64)		
		CRI	R _f	R _g R ₉
2200K	0.74	94	91	96 65
2400K	0.87	94	92	97 56
2700K	0.97	94	92	100 57
3000K	1.00	93	91	99 54
3500K	1.01	95	91	99 62
4000K	1.04	95	91	99 68

Ordering Code


MODEL	LENGTH ¹	OUTPUT ²	CCT	LENS	MOUNTING	FINISH ⁴	FEED POSITION LEFT ⁶	FEED POSITION RIGHT ⁶	ACCESSORIES
KM-BABA-Kendo M BABA	12"-144" 1" increments	VC72VLO-Very Low	18K-1800K	C-Clear	FC-Fixed Clip	POWDER COAT BK-Black BZ-Bronze WH-White	WIRE LEADS (72") LWE-Wire End Feed LWB-Wire Back Feed LWSA-Wire Side A Feed LWSB-Wire Side B Feed LNPF-No Power Feed	WIRE LEADS (72") RWE-Wire End Feed RWB-Wire Back Feed RWSA-Wire Side A Feed RWSB-Wire Side B Feed RNPF-No Power Feed	---N/A, leave blank BLS-Blade louver, Silver BLBK-Blade louver, Black BLWH-Blade louver, White GSS-Glare shield, Silver GSBK-Glare shield, Black GSWH-Glare shield, White
		VC72LO-Low	22K-2200K	HF-Half Frosted	A-Adjustable Hinge Mounting				
		VC72SO-Standard	24K-2400K	F-Frosted	FC45-Fixed Clip, 45° Mounting	PREMIUM MBK-Matte Black WVN-Warm Nickel AB-Aged Brass PG-Polished Gold ⁵ CH-Chrome ⁵	QUICK CONNECTS (4") LFE-Female Q/C, End Feed LFB-Female Q/C, Back Feed LFSA-Female Q/C, Side A Feed LFSB-Female Q/C, Side B Feed LNPF-No Power Feed	QUICK CONNECTS (4") RFE-Female Q/C, End Feed RFB-Female Q/C, Back Feed RFSA-Female Q/C, Side A Feed RFSB-Female Q/C, Side B Feed RNPF-No Power Feed	
		VC72MO-Medium	27K-2700K	FF-Flat Frosted	MAG-Magnetic				
		VC72HO-High	30K-3000K	GR-Narrow Beam Grazer					
		VC72VHO-Very High	35K-3500K	R-Raised ³					
		VC72VHO-Very High	41K-4100K						
		HE64VLO-Very Low	22K-2200K						
		HE64LO-Low	24K-2400K						
		HE64SO-Standard	27K-2700K						
		HE64MO-Medium	30K-3000K						
		HE64HO-High	35K-3500K						
		HE64VHO-Very High	40K-4000K						

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.
2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.
3 - Glare Shield and Blade Louvers not available with Raised Lens.



4 - Finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
5 - Polished Gold and Chrome finishes have a maximum fixture length of 96".
6 - LNPF - RNPF is not a valid configuration option

Powerfeeds and Connectors

Power Feed Position Options and Orientation

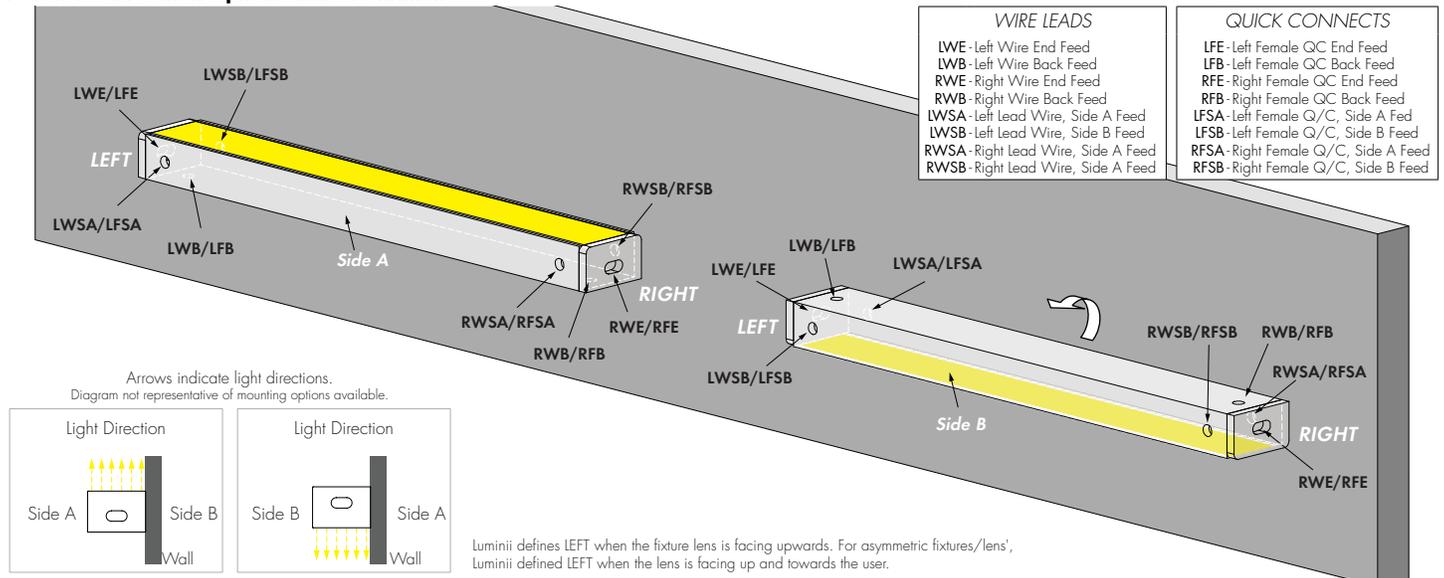

Product Dimensions

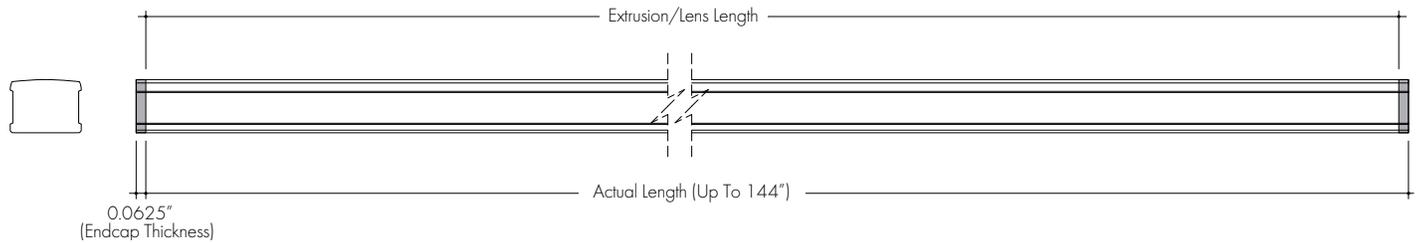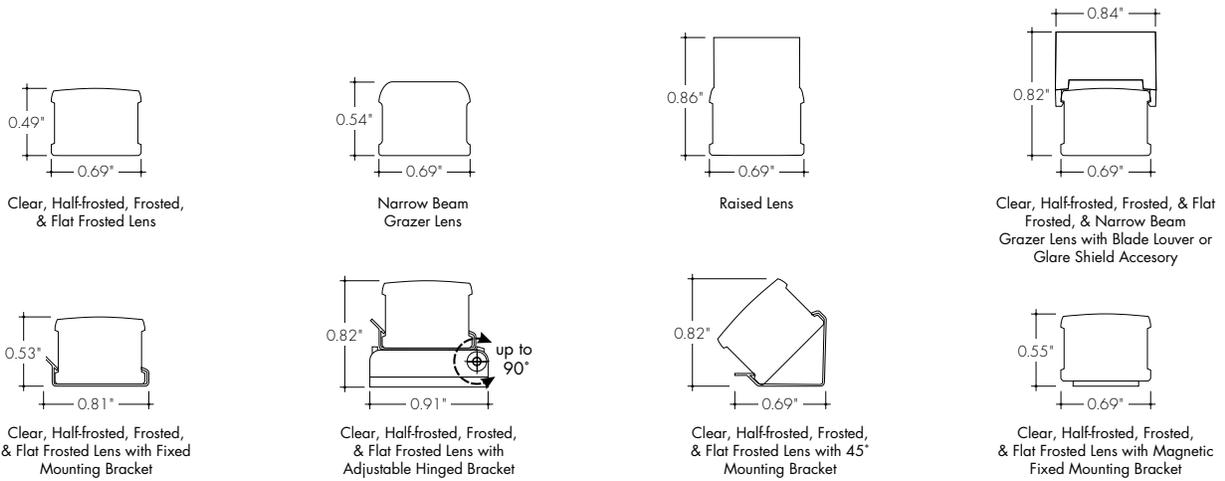

Finish Options

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

Black Powder Coat



Black is a true deep black with a glossy finish.

Bronze Powder Coat



Bronze is a rich, dark brown with a satin finish.

White Powder Coat



White is a polar bright white and field paintable.

Matte Black Premium



Matte Black is a dark, pitch-black with a soft flat finish.

Warm Nickel Premium




Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

Aged Brass Premium



Aged Brass is a deep brown shade with slightly golden undertones.

Polished Gold Premium



Polished Gold is bright and radiant for a brilliant finish.

Chrome Premium



Chrome is a highly reflective silver polish.


Light Transmission and Dotting

Output Options	Lens/Accessory																							
	Clear Lens				Half Frosted Lens				Raised Lens				Narrow Beam Grazer				Frosted Lens				Flat Frosted Lens			
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%
VC72VLO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
VC72LO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
VC72SO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
VC72MO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
VC72HO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
VC72VHO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
HE64VLO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
HE64LO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
HE64SO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
HE64MO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
HE64HO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
HE64VHO	CD	CD	CD	CD	ND	ND	SD	CD	ND	ND	ND	ND	CD	CD	CD	CD	ND	ND	ND	ND	ND	ND	ND	ND
Transmission Percentage	100%				80%				70%				69%				62%				57%			

Use complete Dotting Chart Tool online for more dotting information




I'm also clickable




CD - Clear Dotting
SD - Slight Dotting
ND - No Dotting

Accessory Options

LVSP-4T-BK
Low Voltage, 4 Terminal Splice Box, Black, IP20

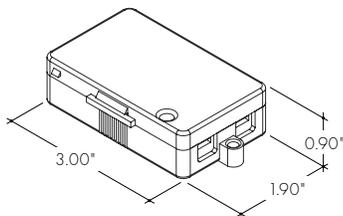


OS-DC-F4-BK
Occupancy Sensor

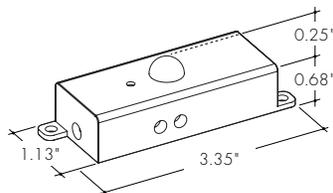


Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output.

DIM-DC-F4-BK
24VDC Low Voltage In-line Dimmer Module

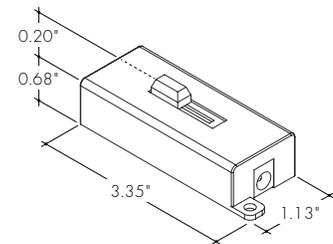


Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output.

NL.EX.D1.B & NL.EX.D3.B
Near Infrared Remote Door Sensor

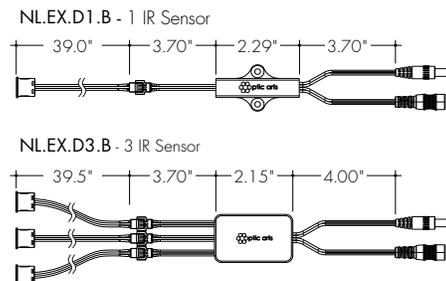


Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output. For more information visit Sensor Spec Sheet [\(Link\)](#)

LV-GS-KMSC-24-XX
Glare Shield reduces glare at high angle, field cuttable. Also available with complete fixture, use ordering code **-GSXX**

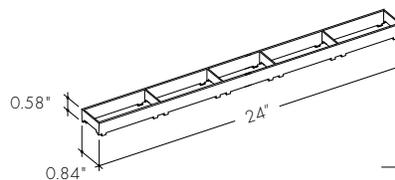

LV-BL-KMSC-24-XX
Blade Louver reduces glare at high angle in two directions. Also available with complete fixture, use ordering code **-BLXX**

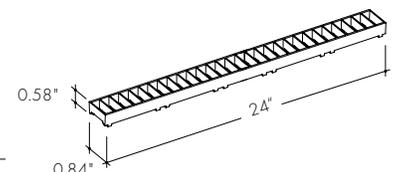


XX	Color
WH	White
BK	Black
SL	Silver

Photometry

KM-48-VC72VHO-30K-F

Kendo M, 4ft, VHO, 3000K, Frosted Lens

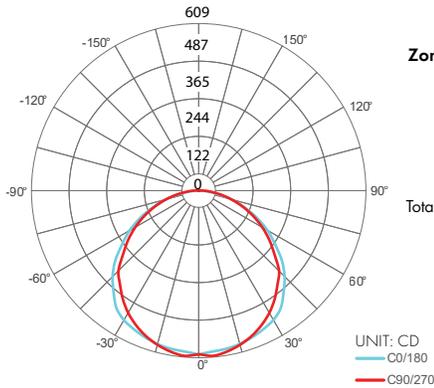


Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	119	25%
0-40	198	42%
0-60	359	76%
0-90	467	99%
0-180	473	100%




KM-48-VC72VHO-30K-GR

Kendo M, 4ft, VHO, 3000K, Narrow BeamGrazer Lens

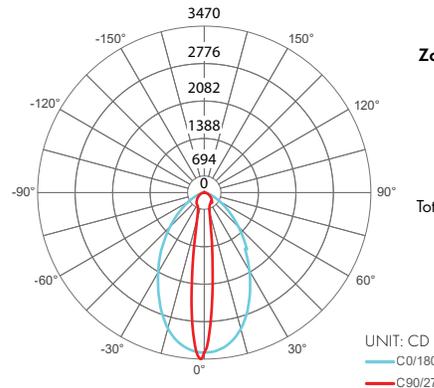


Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	243	46%
0-40	329	63%
0-60	458	88%
0-90	517	99%
0-180	523	100%



KM-48-VC72VHO-30K-R

Kendo M, 4ft, VHO, 3000K, Raised Lens

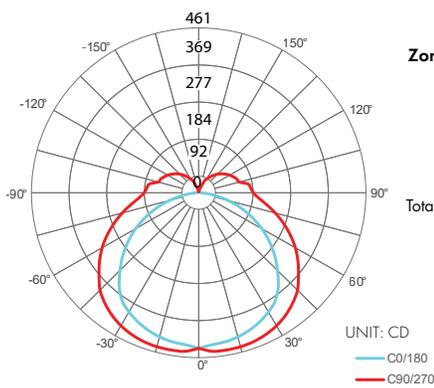


Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	91	17%
0-40	154	29%
0-60	297	56%
0-90	442	83%
0-180	534	100%



KM-48-VC72VHO-30K-HF

Kendo M, 4ft, VHO, 3000K, Half Frosted Lens

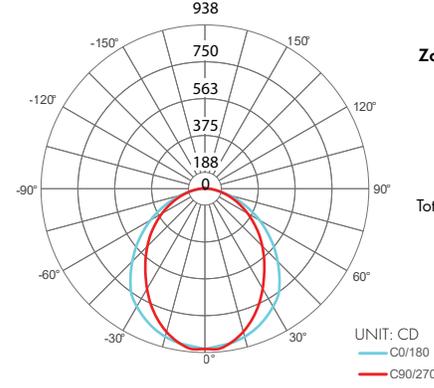


Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	174	29%
0-40	279	46%
0-60	475	79%
0-90	595	99%
0-180	603	100%



KM-48-VC72VHO-30K-C

Kendo M, 4ft, VHO, 3000K, Clear Lens

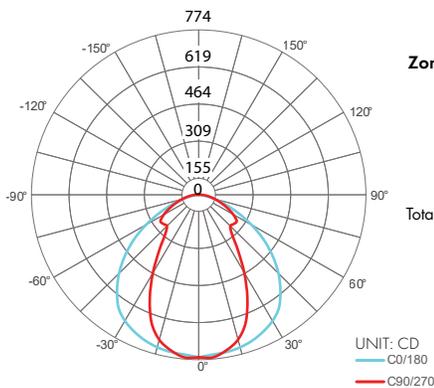


Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	253	33%
0-40	394	52%
0-60	619	82%
0-90	749	99%
0-180	759	100%



KM-48-VC72VHO-30K-FF

Kendo M, 4ft, VHO, 3000K, Flat Frosted Lens

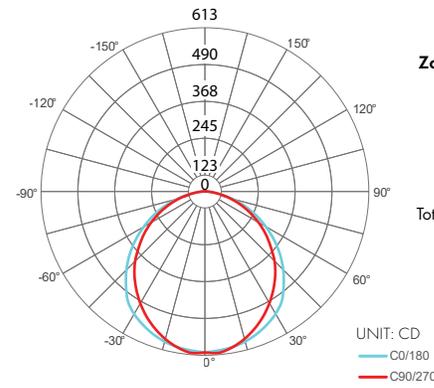

Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	117	27%
0-40	192	44%
0-60	339	78%
0-90	432	99%
0-180	436	100%



Power Consumption

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, output, and desired power feed to get a full power consumption table.



I'm also click-able

Desired Nominal Length: _____

Desired Output: _____

Desired CCT: _____

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Power Supplies



See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Dimming Power Supplies 1% 120VAC - 277VAC

MODEL	WATTAGE	OUTPUT	INPUT
PSD-PSD Series	48 - 48 Watts 96 - 96 Watts 288 - 288 Watts	24 - 24 VDC	Blank - 120 VAC 277 - 277 VAC

MODELS	PSD-48-24	PSD-96-24	PSD-288-24
Length	11.25"	11.25"	13.06"
Width	3.42"	3.42"	8.42"
Depth	3.24"	3.27"	4.47"

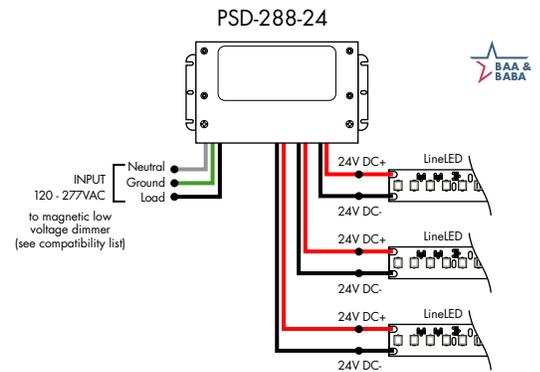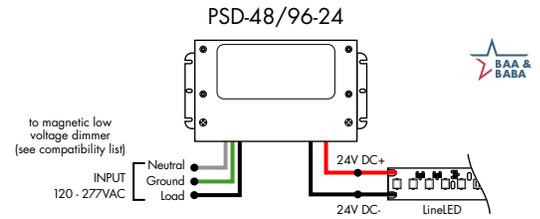

For use with Static White



Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

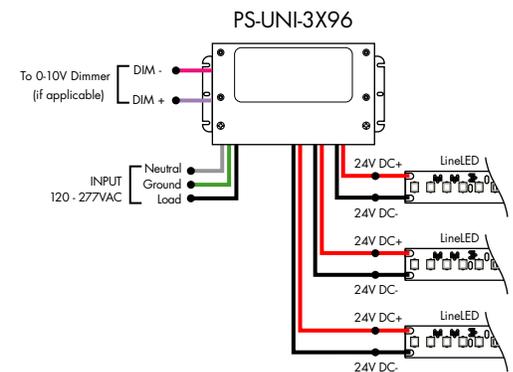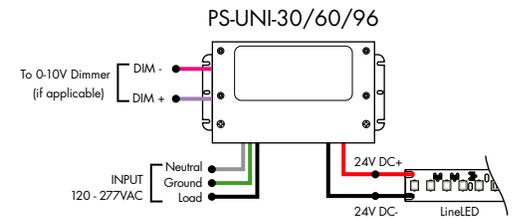

Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White


Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC
	010V-LOG - 0-10V Dimming (0.1%), Logarithmic			

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

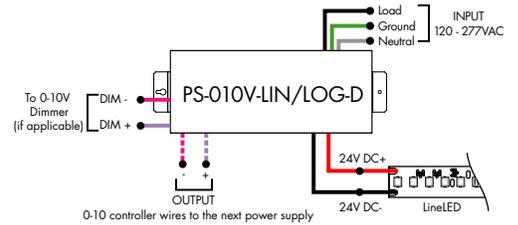

PS-010V-LIN/LOG-D-3X96

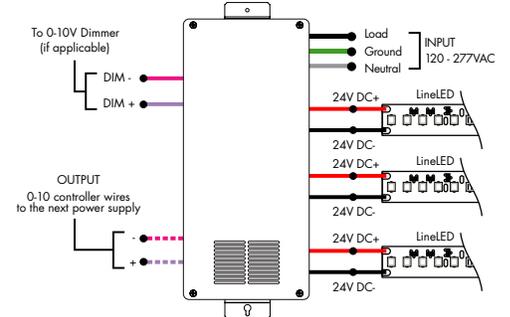


For use with Static White

Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear	D-Dry	96-96 Watts	24-24 VDC	AWNR - Athena
	010V-LOG - 0-10V Dimming (0.1%), Logarithmic				

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

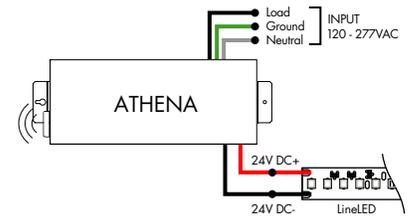


For use with Static White


Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

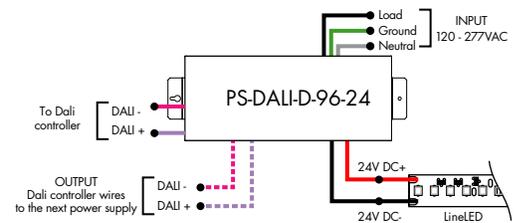

PS-DALI-D-3X96-24

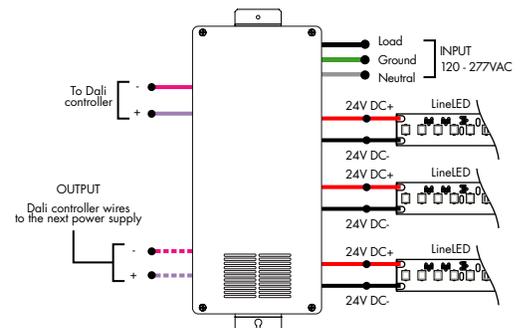

Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI2-DT6-DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24-24 VDC

Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"

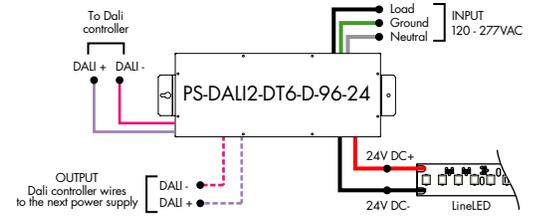



For use with Static White

Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

ZONAL CONTROL POWER SUPPLIES.
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

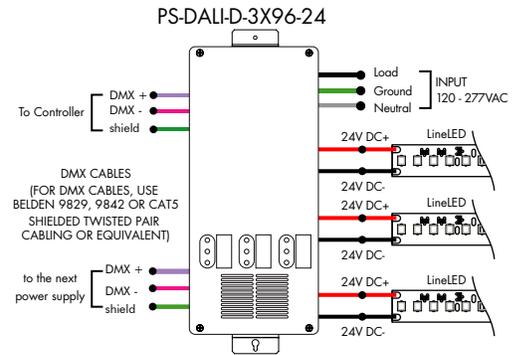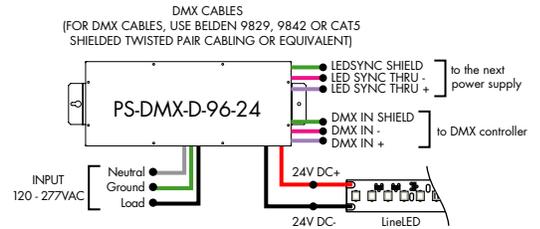


For use with Static White

Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

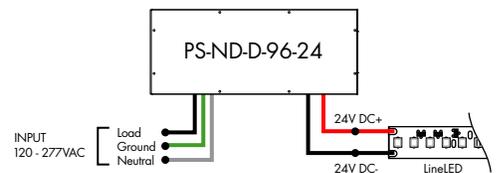

Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120 - Power Supply, 120VAC PS240 - Power Supply, 240VAC PS277 - Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

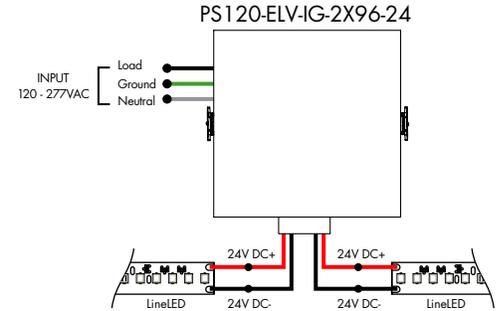

Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver 40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

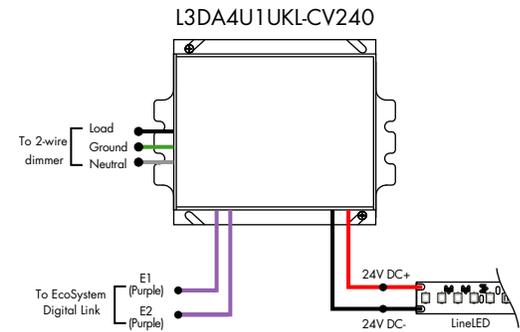

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

