



**Features**

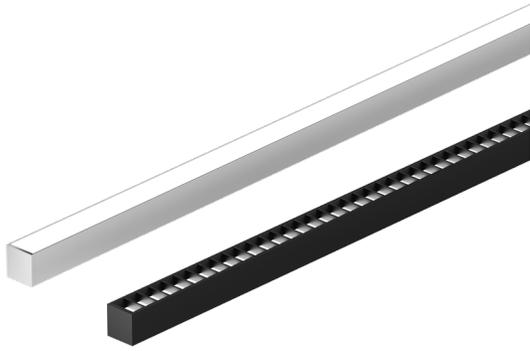

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 90' depending on output
- Suitable for undercabinet, millwork, direct view, vanity, architectural reveals, accent lighting and surface mount applications
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7 W/ft or less
- Dot free even illumination with frosted lens and high color quality outputs

- Class 2 listed for damp locations
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Vibrant Color options offer premium color quality with R9 values up to 98
- High Efficacy options offer best in class output and efficacy with over 910 lm/ft and up to 129 lm/W
- Average Life (L70): 50,000hrs
- 7 Year warranty



**Finish Options** (see page 3 for additional information)

- Powder Coat**     Black     Bronze     White
- Premium**     Matte Black     Warm Nickel     Aged Brass
- Polished Gold     Chrome



**Technical Information**

TYPE	Vibrant Color VC72					
OUTPUT OPTIONS	VC72VLO	VC72LO	VC72SO	VC72MO	VC72HO	VC72VHO
<b>Lumens Output (3000K)</b> <small>(with a Clear Lens)</small>	103 lm/ft	262 lm/ft	349 lm/ft	461 lm/ft	557 lm/ft	742 lm/ft
<b>Average Power Consumption</b> <small>(for a 4" section)</small>	1.1 W/ft	2.8 W/ft	3.7 W/ft	4.9 W/ft	5.9 W/ft	7.9 W/ft
<b>Efficacy</b>	94 lm/W	94 lm/W	94 lm/W	94 lm/W	94 lm/W	94 lm/W
<b>Max Run Length</b> <small>(in series)</small>	56.9 ft	32 ft	28 ft	24 ft	21 ft	18 ft
<b>Ambient Operating Temperature Range*</b>	-4°F - 122°F (-20°C - 50°C)		-4°F - 113°F (-20°C - 45°C)		-4°F - 104°F (-20°C - 40°C)	-4°F - 86°F (-20°C - 30°C)

\*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

TYPE	High Efficacy HE64					
OUTPUT OPTIONS	HE64VLO	HE64LO	HE64SO	HE64MO	HE64HO	HE64VHO
<b>Lumens Output (3000K)</b> <small>(with a Clear Lens)</small>	114 lm/ft	246 lm/ft	353 lm/ft	469 lm/ft	666 lm/ft	914 lm/ft
<b>Average Power Consumption</b> <small>(for a 4" section)</small>	1 W/ft	1.9 W/ft	2.9 W/ft	3.8 W/ft	5.6 W/ft	7.1 W/ft
<b>Efficacy</b>	114 lm/W	129 lm/W	122 lm/W	123 lm/W	119 lm/W	129 lm/W
<b>Max Run Length</b> <small>(in series)</small>	90 ft	55 ft	34.9 ft	26 ft	17 ft	13 ft
<b>Ambient Operating Temperature Range*</b>	-4°F - 122°F (-20°C - 50°C)			-4°F - 104°F (-20°C - 40°C)		-4°F - 95°F (-20°C - 35°C)

\*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

CCT	Multiplier <small>(ref. - 30K)</small>	TM-30			
		CRI	R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
1800K	0.50	95	94	99	86
2200K	0.66	96	94	101	95
2400K	0.90	98	96	101	91
2700K	0.93	98	96	102	93
3000K	1.00	97	94	104	99
3500K	1.04	96	94	105	97
4100K	1.05	97	95	104	96

CCT	Multiplier <small>(ref. - 30K)</small>	High Efficacy (HE64)			
		CRI	R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
2200K	0.74	94	91	96	65
2400K	0.87	94	92	97	56
2700K	0.97	94	92	100	57
3000K	1.00	93	91	99	54
3500K	1.01	95	91	99	62
4000K	1.04	95	91	99	68

**Ordering Code**


MODEL	LENGTH <sup>1</sup>	OUTPUT <sup>2</sup>	CCT	LENS	MOUNTING	FINISH <sup>3</sup>	FEED POSITION LEFT <sup>5</sup>	FEED POSITION RIGHT <sup>5</sup>
MK-BABA - Myka BABA	12"-144" 1" increments	VC72VLO - Very Low VC72LO - Low VC72SO - Standard VC72MO - Medium VC72HO - High VC72VHO - Very High	18K - 1800K 22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	C - Clear HF - Half Frosted F - Frosted MF - Matte Frosted BLV - Black Blade Louver WLW - White Blade Louver	CB - Concealed Bracket MAG - Magnetic A - Adjustable Hinge Mounting	<b>POWDER COAT</b> BK - Black BZ - Bronze WH - White  <b>PREMIUM</b> MBK - Matte Black WN - Warm Nickel AB - Aged Brass PG - Polished Gold <sup>4</sup> CH - Chrome <sup>4</sup>	<b>WIRE LEADS (72")</b> LWE - Wire End Feed LWB - Wire Back Feed LNPF - No Power Feed	<b>WIRE LEADS (72")</b> RWE - Wire End Feed RWB - Wire Back Feed RNPF - No Power Feed
	12"-144" 2" increments	HE64VLO - Very Low HE64LO - Low HE64SO - Standard HE64MO - Medium HE64HO - High HE64VHO - Very High	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K				<b>QUICK CONNECTS (4")</b> LFE - Female Q/C, End Feed LFB - Female Q/C, Back Feed LNPF - No Power Feed	<b>QUICK CONNECTS (4")</b> RFE - Female Q/C, End Feed RFB - Female Q/C, Back Feed RNPF - No Power Feed

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.  
2 - Title 24 JAB achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.  
3 - Finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.


4 - Polished Gold, and Chrome finishes have a maximum fixture length of 96".  
5 - LNPF - RNPF is not a valid configuration option

**Powerfeeds and Connectors**


**Power Feed Position Options and Orientation**

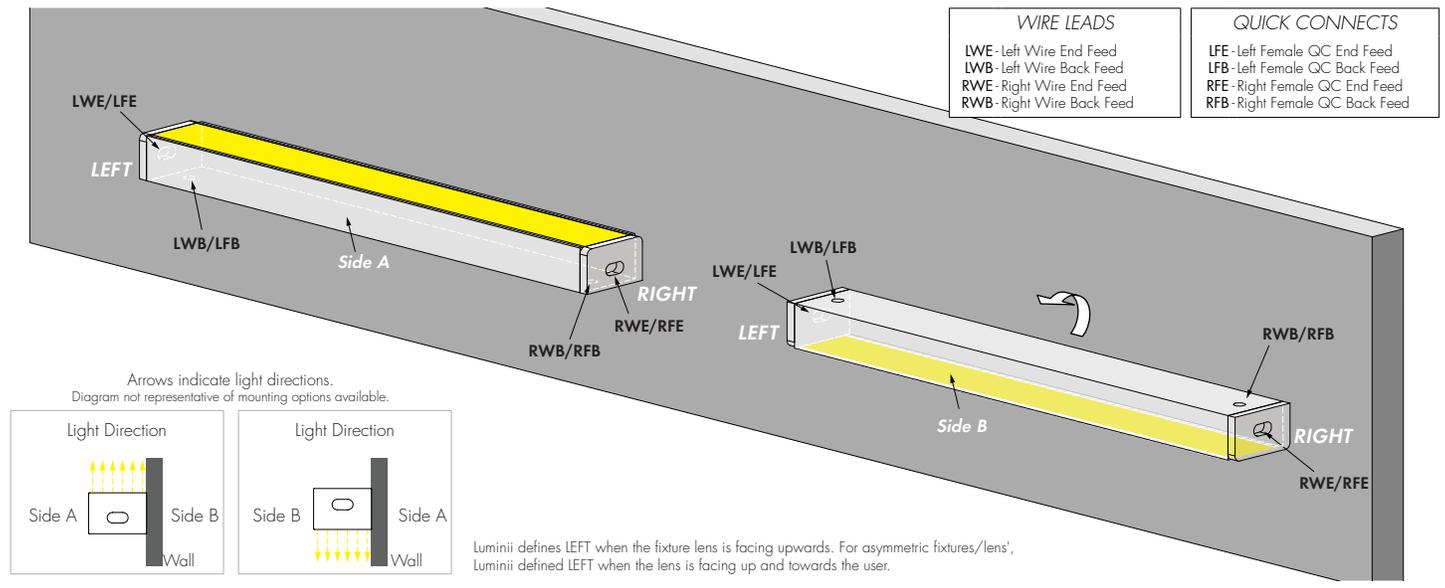


**Linking and Extension Cable Options**

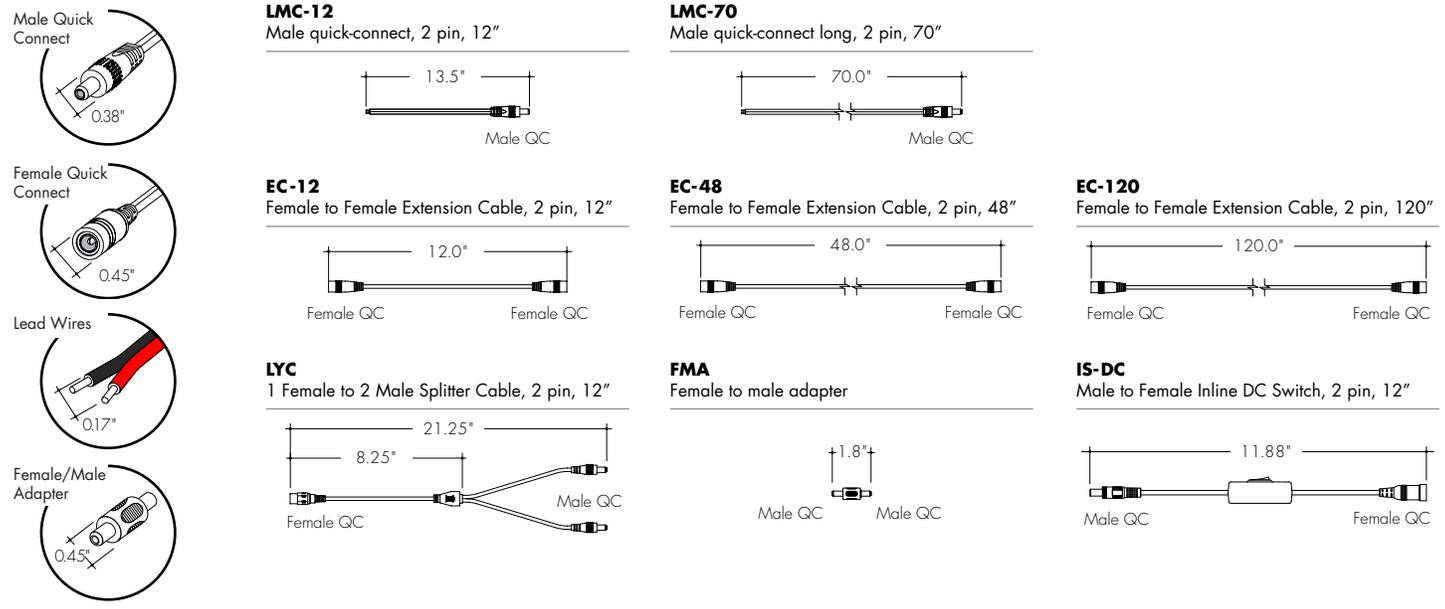

**Sample Layout**

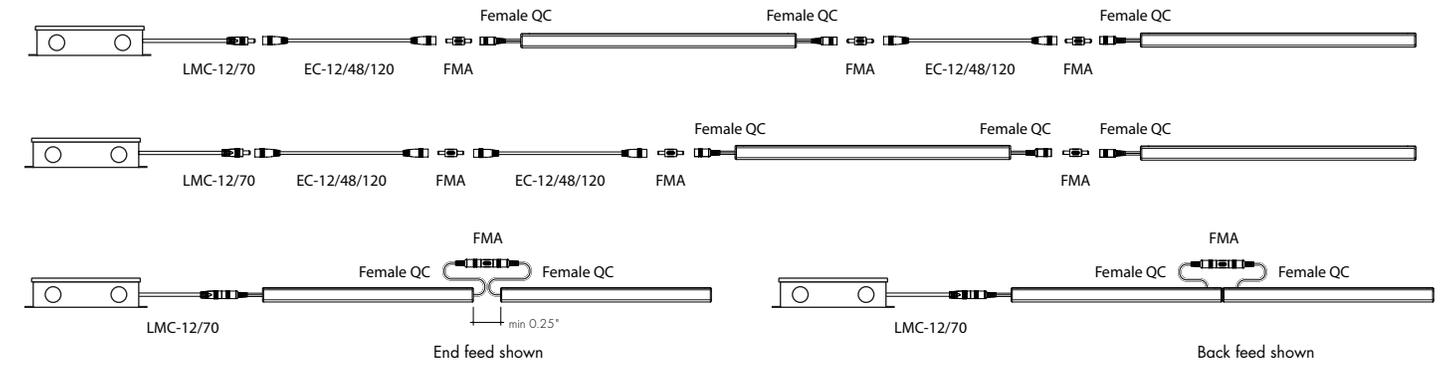

**Product Dimensions**

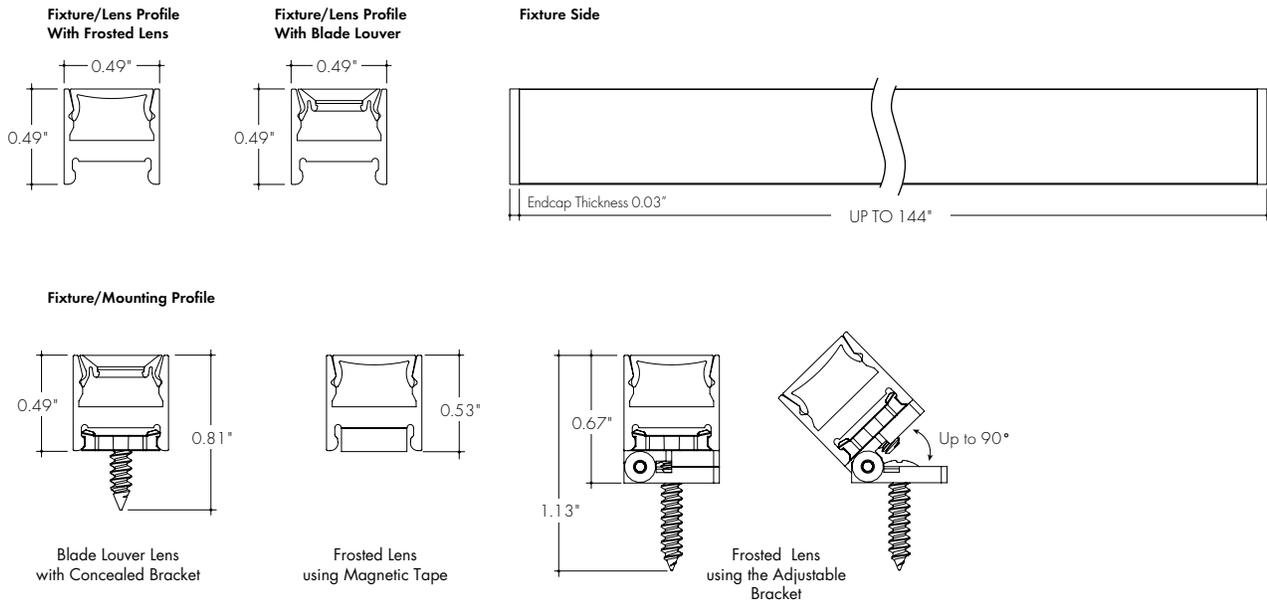

**Finish Options**

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Base finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

**Black**  
Powder Coat



Black is a true deep black with a glossy finish.

**Bronze**  
Powder Coat



Bronze is a rich, dark brown with a satin finish.

**White**  
Powder Coat




White is a polar bright white and field paintable.

**Matte Black**  
Premium



Matte Black is a dark, pitch-black with a soft flat finish.

**Warm Nickel**  
Premium

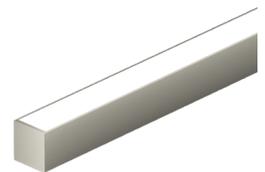

Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

**Aged Brass**  
Premium



Aged Brass is a deep brown shade with slightly golden undertones.

**Polished Gold**  
Premium



Polished Gold is bright and radiant for a brilliant finish.

**Chrome**  
Premium




Chrome is a highly reflective silver polish.

Light Transmission and Dotting

Output Options	Lens/Accessory																							
	Clear Lens				Half Frosted Lens				Frosted Lens				Black Blade Louver				White Blade Louver				Matte Frosted Lens			
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%
VC72VLO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
VC72LO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
VC72SO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
VC72MO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
VC72HO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
VC72VHO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
HE64VLO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
HE64LO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
HE64SO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
HE64MO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
HE64HO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
HE64VHO	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	CD
Transmission Percentage	100%				84%				60%				31%				53%				73%			


Use complete Dotting Chart Tool online for more dotting information



Accessory Options


**LVSP-4T-BK**

Low Voltage, 4 Terminal Splice Box, Black, IP20

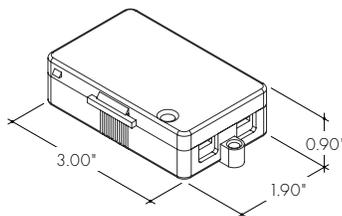

**O5-DC-F4-BK**


Occupancy Sensor

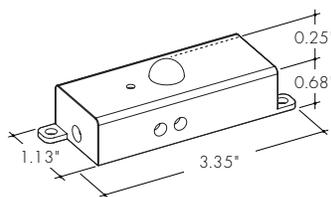

Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output.

**DIM-DC-F4-BK**

24VDC Low Voltage In-line Dimmer Module

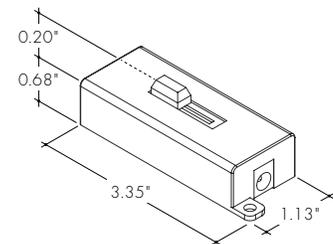


Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output.


**NL.EX.D1.B & NL.EX.D3.B**

Near Infrared Remote Door Sensor

NL.EX.D1.B - 1 IR Sensor




NL.EX.D3.B - 3 IR Sensor

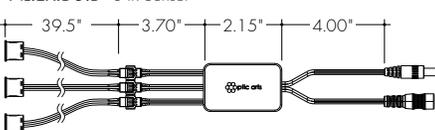

Male Quick Connect, FMA, LMC, LYC, or IS-DC are required for input and output. For more information visit Sensor Spec Sheet [\(Link\)](#)

**LV-BL-MKC-12-BK**


Blade Louver reduces glare at high angle in two directions Also available with complete fixture, use ordering code **-BLV**

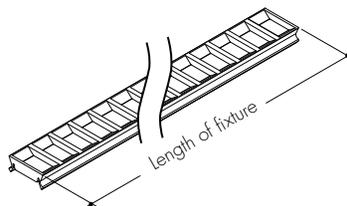

This Black louver/lens combo comes in 12" increments and sits in place of a Myka lens, not in addition to.

**LV-BL-MKC-12-WH**

Blade Louver reduces glare at high angle in two directions Also available with complete fixture, use ordering code **-WLV**

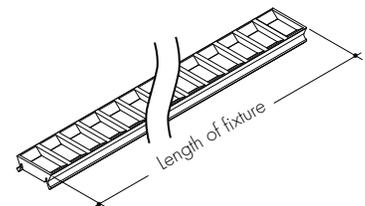


This White louver/lens combo comes in 12" increments and sits in place of a Myka lens, not in addition to.

Photometry

MK-48-VC72VHO-30K-C

Myka, 4ft, VHO, 3000K, Clear Lens

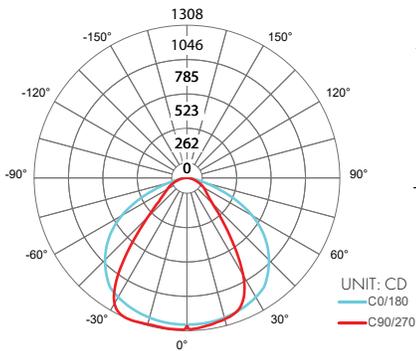


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	258	35%
0-40	420	57%
0-60	647	87%
0-90	735	99%
0-180	742	100%




MK-48-VC72VHO-30K-HF

Myka, 4ft, VHO, 3000K, Half-Frosted Lens

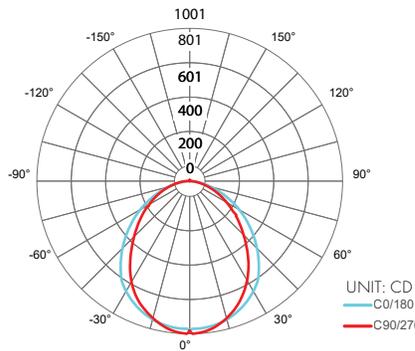


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	186	30%
0-40	299	48%
0-60	502	81%
0-90	615	99%
0-180	622	100%



MK-48-VC72VHO-30K-F

Myka, 4ft, VHO, 3000K, Frosted Lens

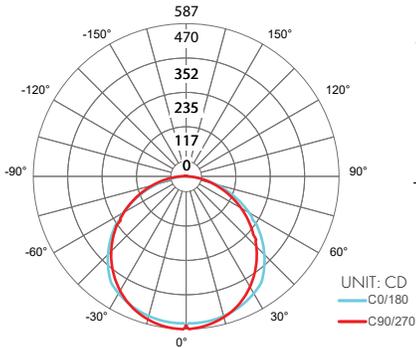


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	114	26%
0-40	189	42%
0-60	341	77%
0-90	440	99%
0-180	445	100%



MK-48-VC72VHO-30K-MF

Myka, 4ft, VHO, 3000K, Matte-Frosted Lens

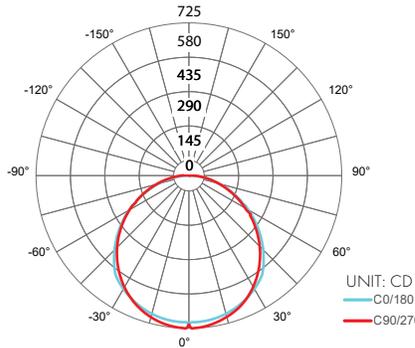


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	139	26%
0-40	230	42%
0-60	412	76%
0-90	535	99%
0-180	542	100%



MK-48-VC72VHO-30K-BLV

Myka, 4ft, VHO, 3000K, Black Blade Louver

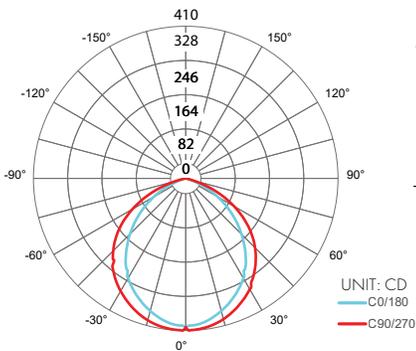


**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	75	32%
0-40	122	52%
0-60	204	88%
0-90	230	99%
0-180	233	100%



MK-48-VC72VHO-30K-WLV

Myka, 4ft, VHO, 3000K, White Blade Louver

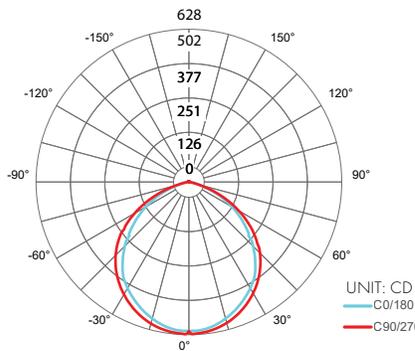

**Zonal Lumen Summary 3000K**

Zone	Lumen	% Fixture
0-30	117	30%
0-40	191	49%
0-60	329	84%
0-90	386	99%
0-180	390	100%



**Power Consumption**

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, output, and desired power feed to get a full power consumption table.



I'm also click-able

Desired Nominal Length: \_\_\_\_\_

Desired Output: \_\_\_\_\_

Desired CCT: \_\_\_\_\_

**Voltage Drop Calculator**

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

## Power Supplies



See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White

#### Ordering Code - Dimming Power Supplies 1% 120VAC - 277VAC

MODEL	WATTAGE	OUTPUT	INPUT
PSD-PSD Series	48 - 48 Watts 96 - 96 Watts 288 - 288 Watts	24 - 24 VDC	Blank - 120 VAC 277 - 277 VAC

MODELS	PSD-48-24	PSD-96-24	PSD-288-24
<b>Length</b>	11.25"	11.25"	13.06"
<b>Width</b>	3.42"	3.42"	8.42"
<b>Depth</b>	3.24"	3.27"	4.47"

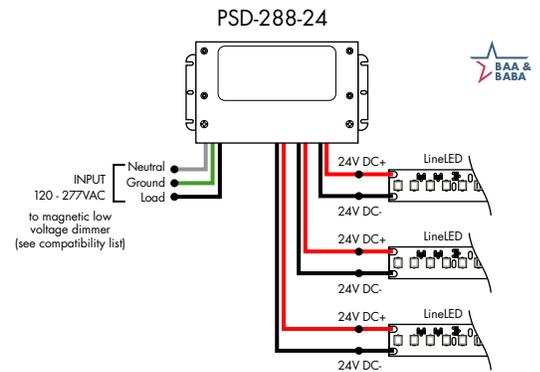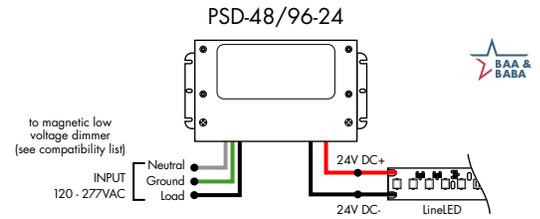

### For use with Static White



#### Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming  
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
<b>Length</b>	6.50"	7.40"	8.66"	11.85"
<b>Width</b>	3.73"	3.73"	3.73"	4.32"
<b>Depth</b>	1.61"	1.61"	1.61"	1.81"

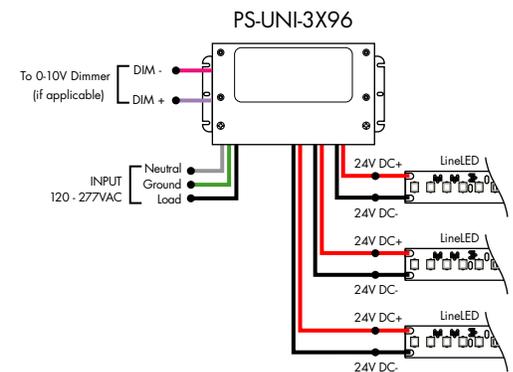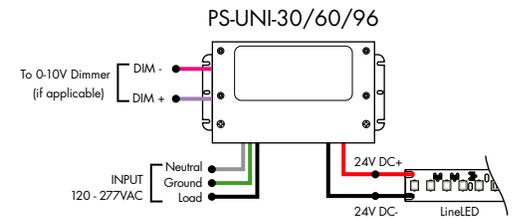

## Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White


#### Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC
	010V-LOG - 0-10V Dimming (0.1%), Logarithmic			

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

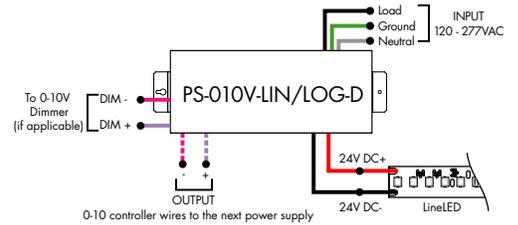

PS-010V-LIN/LOG-D-3X96

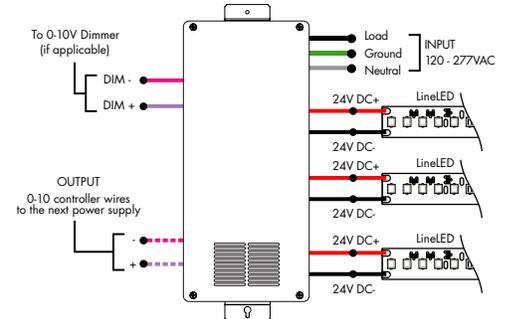


### For use with Static White

#### Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear	D-Dry	96-96 Watts	24-24 VDC	AWNR - Athena
	010V-LOG - 0-10V Dimming (0.1%), Logarithmic				

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

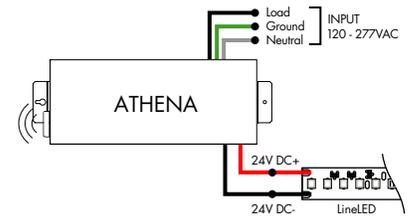


### For use with Static White


#### Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

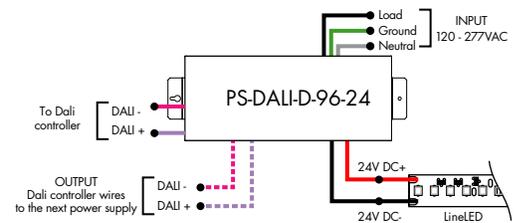

PS-DALI-D-3X96-24

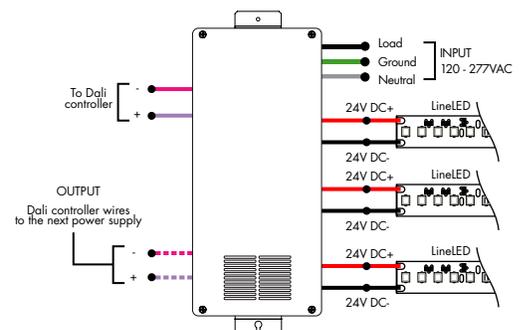

## Power Supplies


See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

### For use with Static White

#### Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI2-DT6-DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24-24 VDC

<b>Model</b>	<b>96W</b>
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

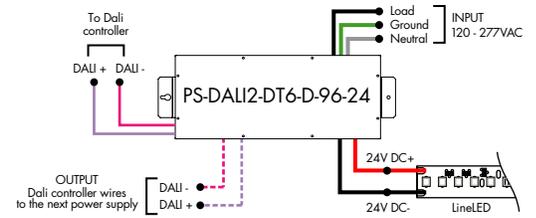



### For use with Static White

#### Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
<b>Length</b>	14.40"	15.00"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.56"

ZONAL CONTROL POWER SUPPLIES.  
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

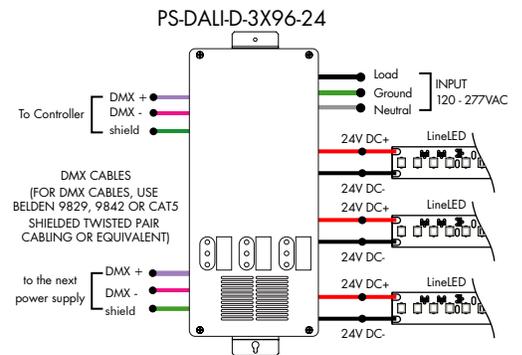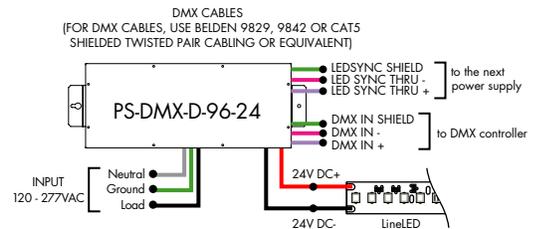


### For use with Static White

#### Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

<b>MODELS</b>	<b>96W</b>
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

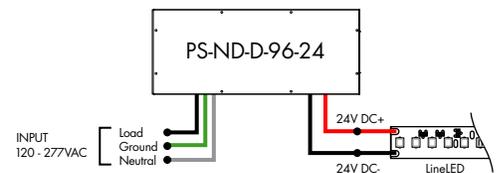

## Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.


### For use with Static White

#### Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120 - Power Supply, 120VAC PS240 - Power Supply, 240VAC PS277 - Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

#### MODELS 2X96W

<b>Length</b>	8.40"
<b>Width</b>	8.30"
<b>Depth</b>	8.10"

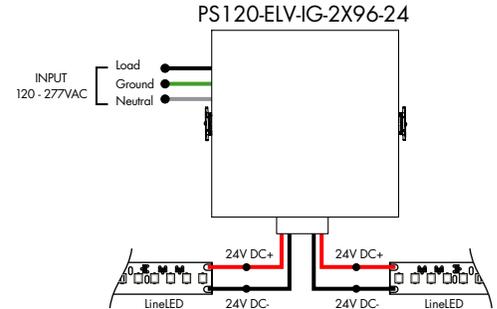

Luminii is a Lutron OEM Advantage Partner

#### Lutron Power Supplies 1%


##### MODEL

**L3DA4U1UKL-CV240**

HiLume™ 1% EcoSystem Voltage LED driver 40W max

#### MODELS L3DA4U1UKL-CV240

<b>Length</b>	4.98"
<b>Width</b>	4.00"
<b>Depth</b>	2.62"

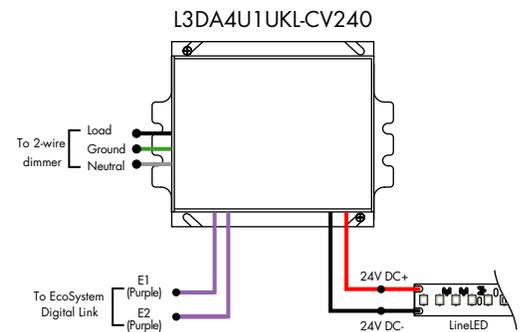

Luminii is a Lutron OEM Advantage Partner

#### Lutron Power Supplies 0.1%

##### MODEL

**L3D0-96W24V-U**

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

#### MODELS L3D0

<b>Length</b>	10.50"
<b>Width</b>	5.50"
<b>Depth</b>	2.00"

